




Bunch-by-bunch feedback systems for SuperKEKB collider

Makoto Tobiyama

KEK Accelerator Laboratory

SuperKEKB accelerators


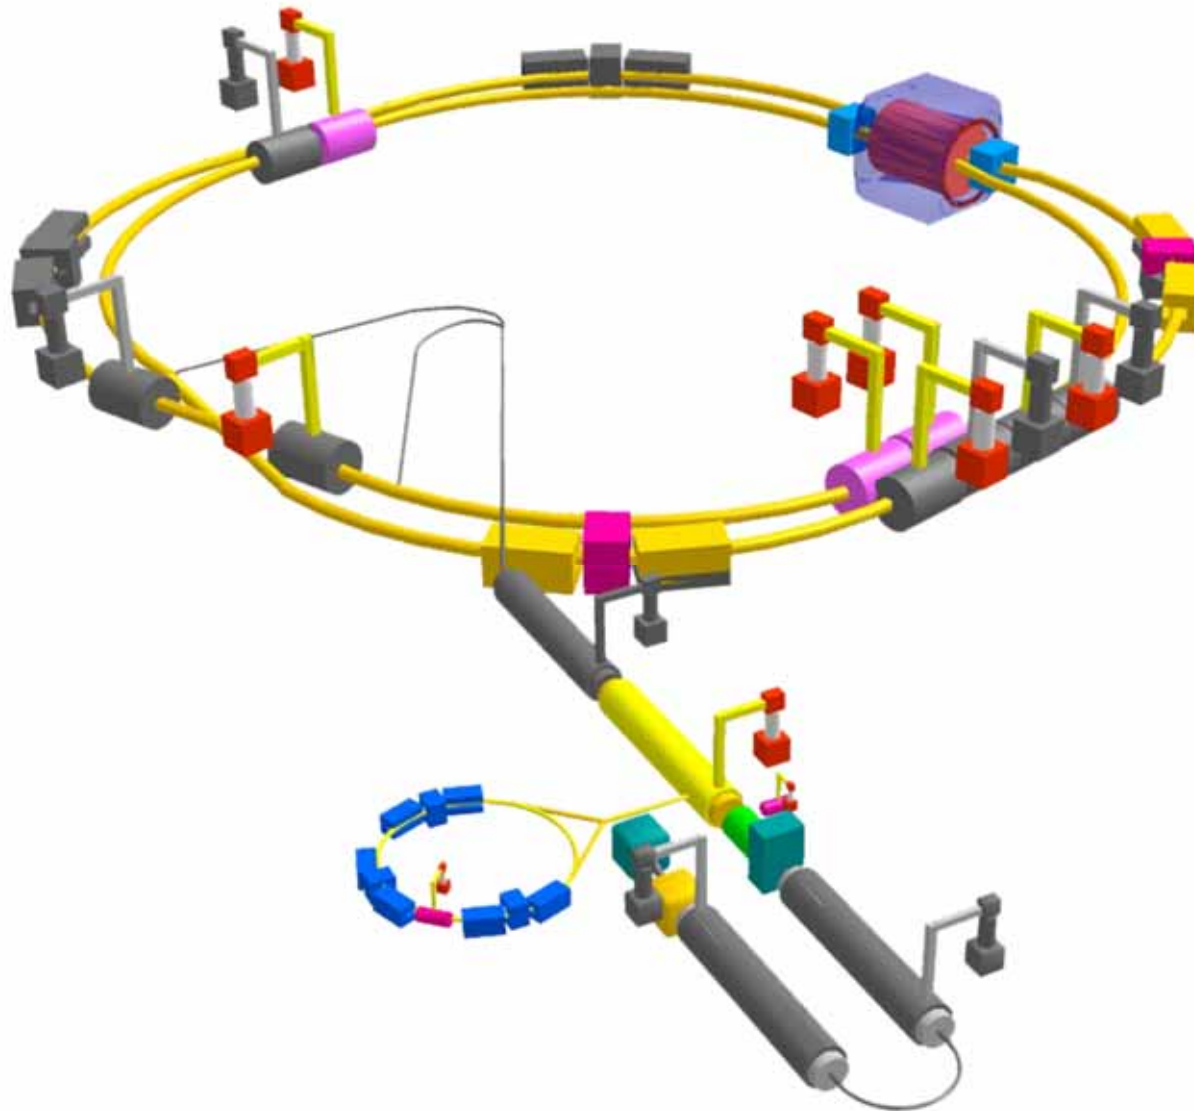


- Circumference 3km
- LER:e⁺ 4GeV 3.6A
- HER:e⁻ 7GeV 2.6A
- $f_{RF}=508.886\text{MHz}$
- $h=5120$
- Low emittance
3.2/4.6nm with ~0.28%
xy-coupling
- Bunch length 6/5 mm
@1mA/bunch
- β^* at IP H/V
32/0.27mm 25/0.3mm
- Luminosity $\sim 60 \times 10^{35}$
x30 of KEKB


High beam current colliders

- **Complicated, many-mode coupled-bunch instabilities(CBI)**
 - Ion trapping, Fast Ion instability(HER electron)
 - Electron Cloud Instability (LER positron)
 - Trapped modes, HOMs of the vacuum components
 - Mode coupling instabilities from beam collimators
- **Suppress the CBI using BxB feedback**
 - Detect individual oscillations of all the bunches, calculate the feedback kick, then kick back individual bunch.
 - Transverse plane (Horizontal, Vertical)
 - Longitudinal plane


Bunch feedback systems (original)

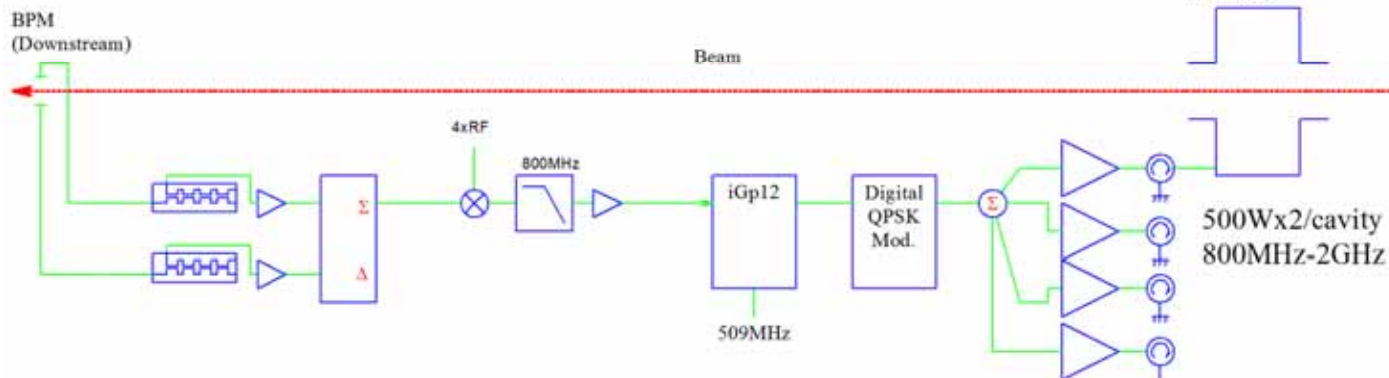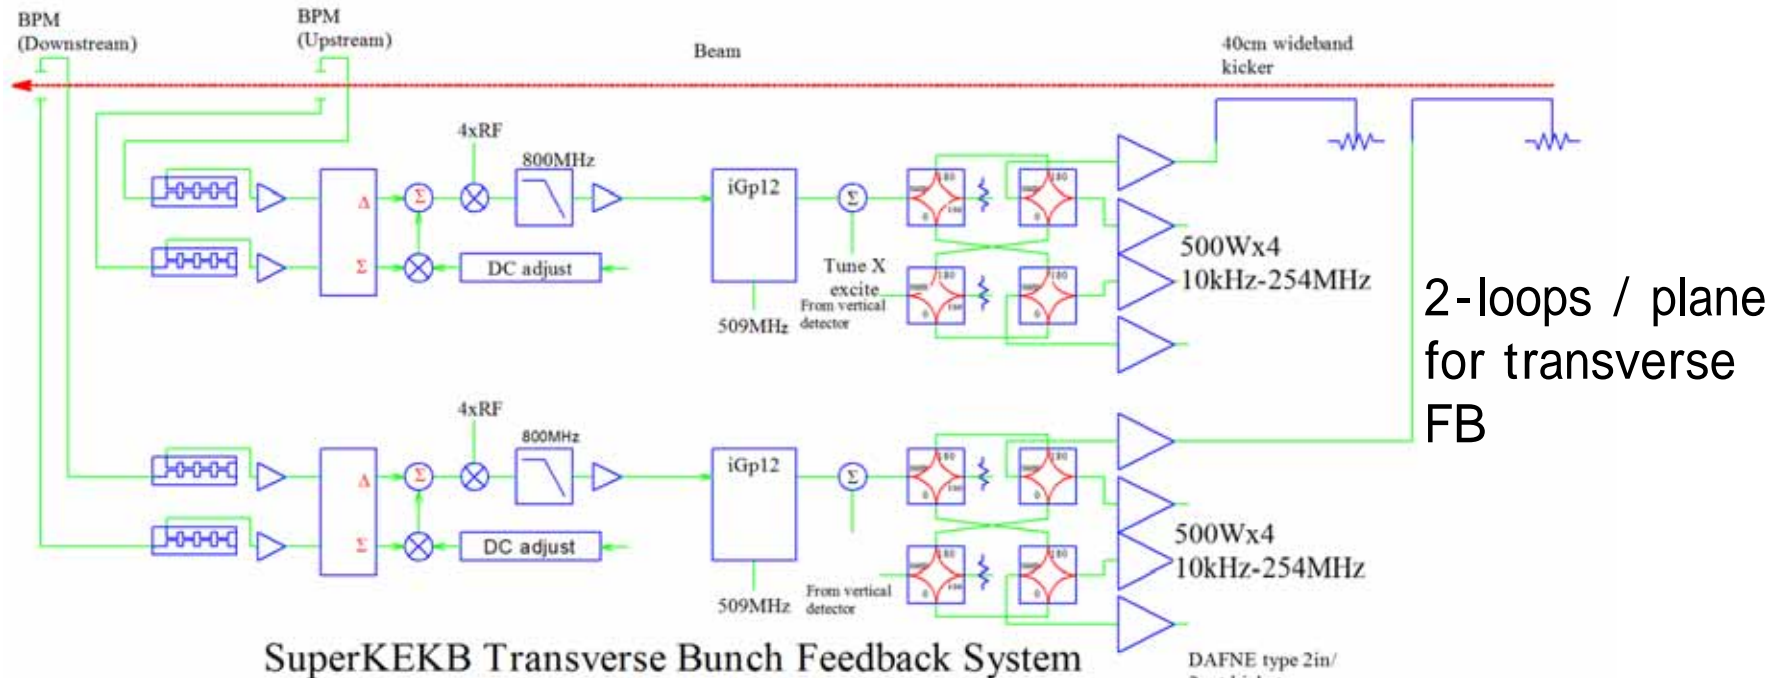


SuperKEKB Fuji straight section


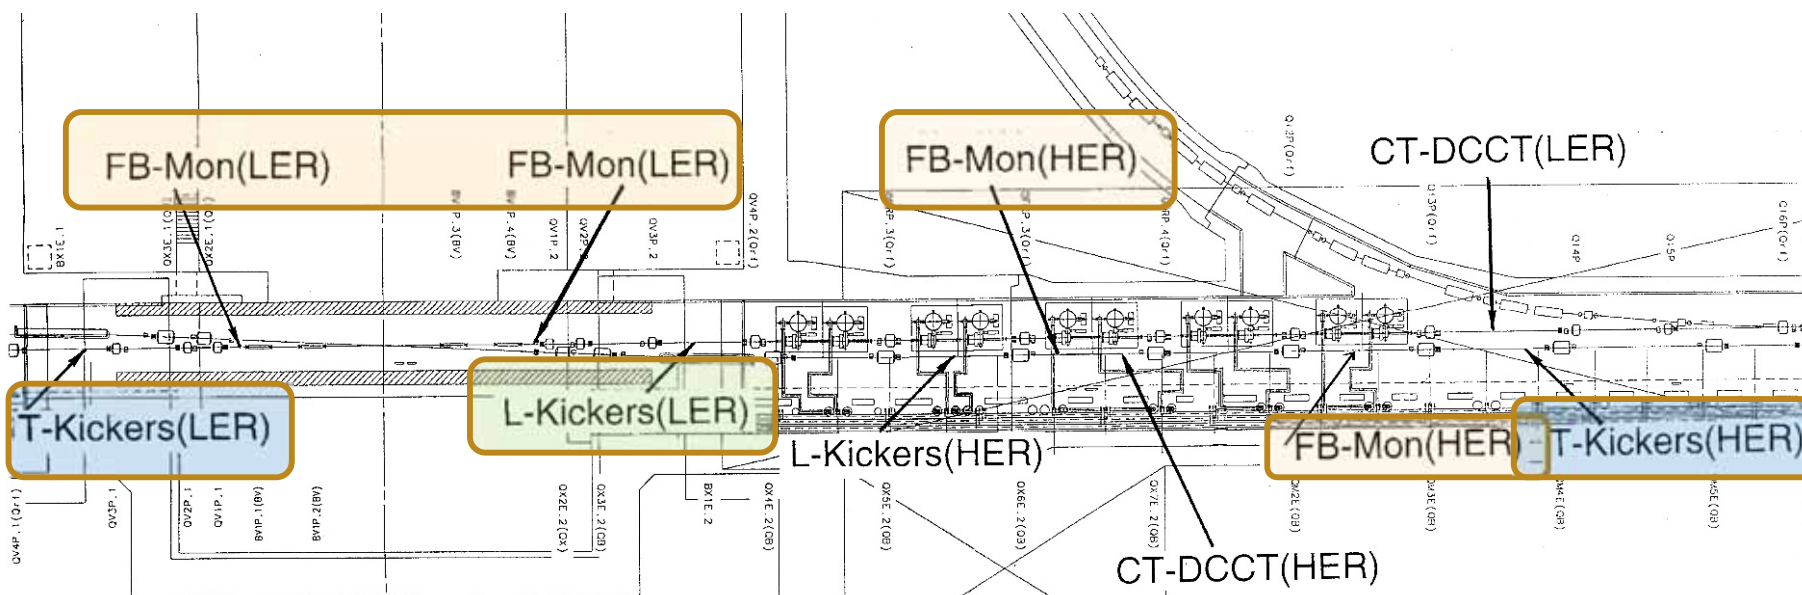


SuperKEKB Fuji straight section

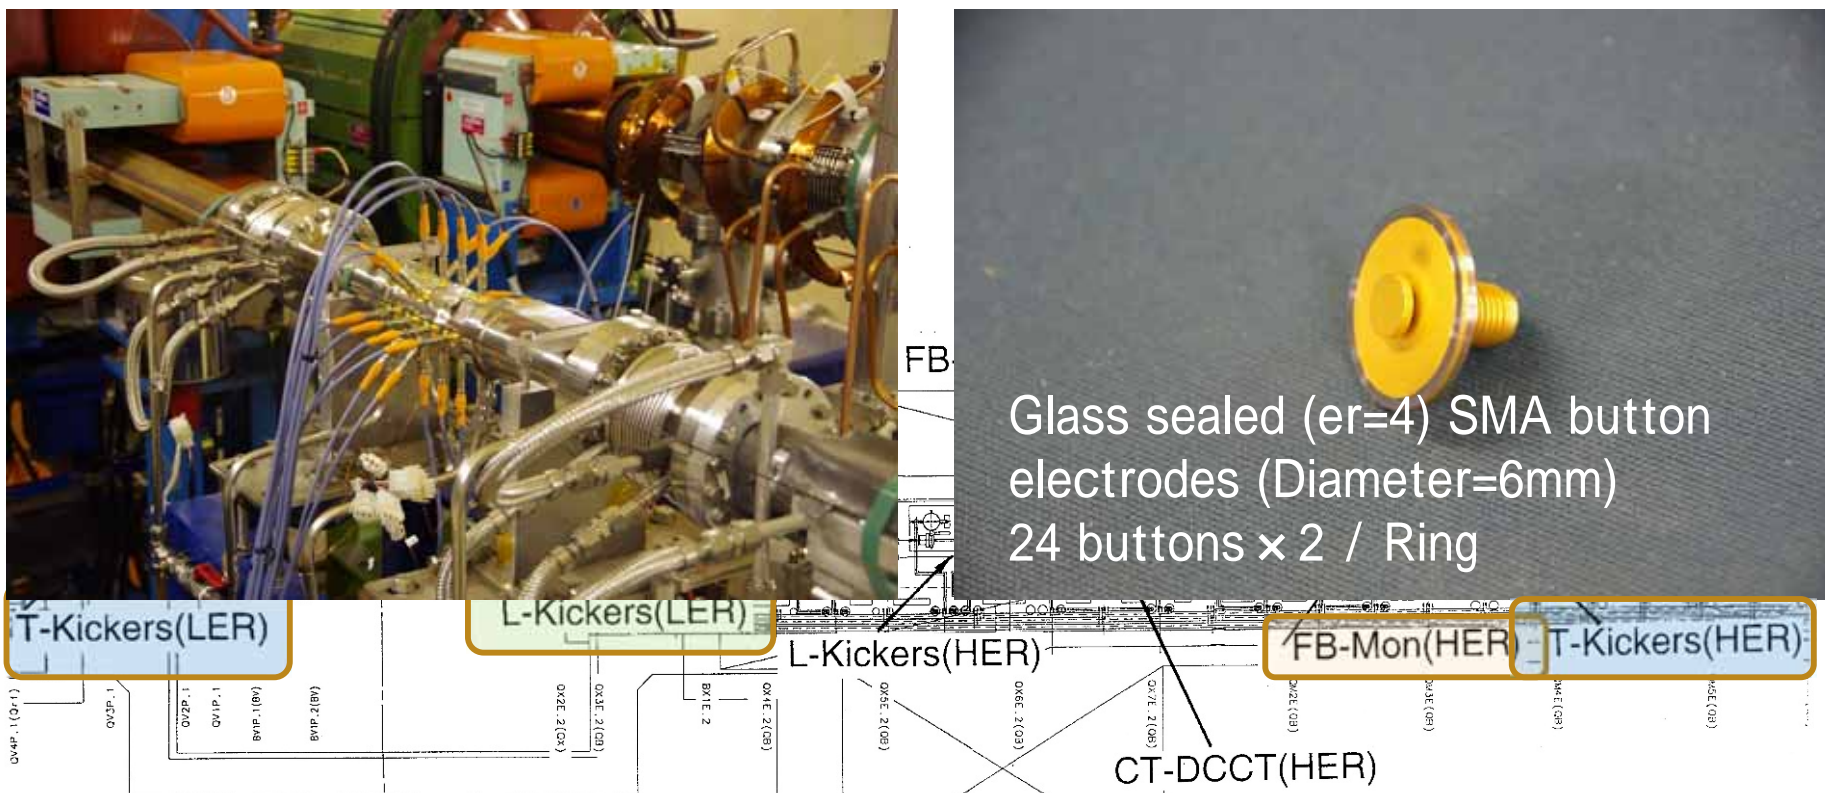


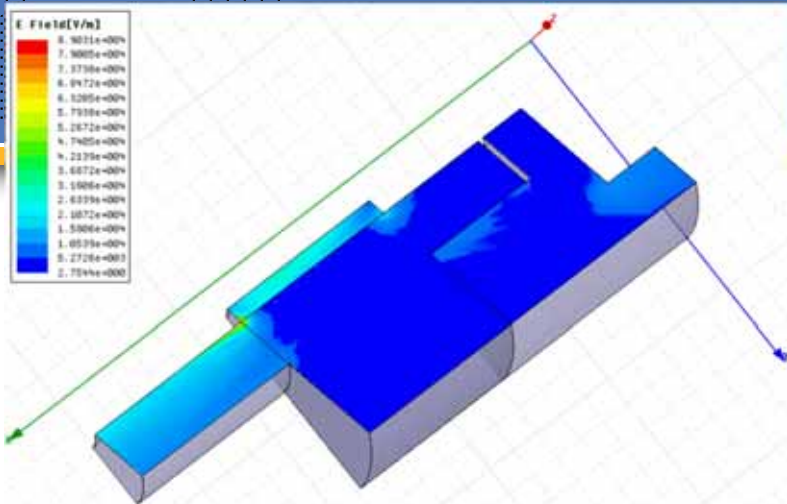


KEKB feedthrough for FB

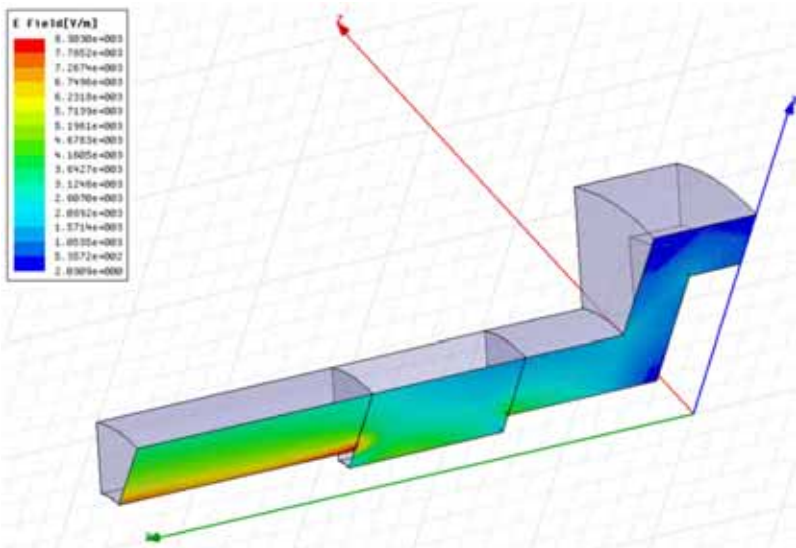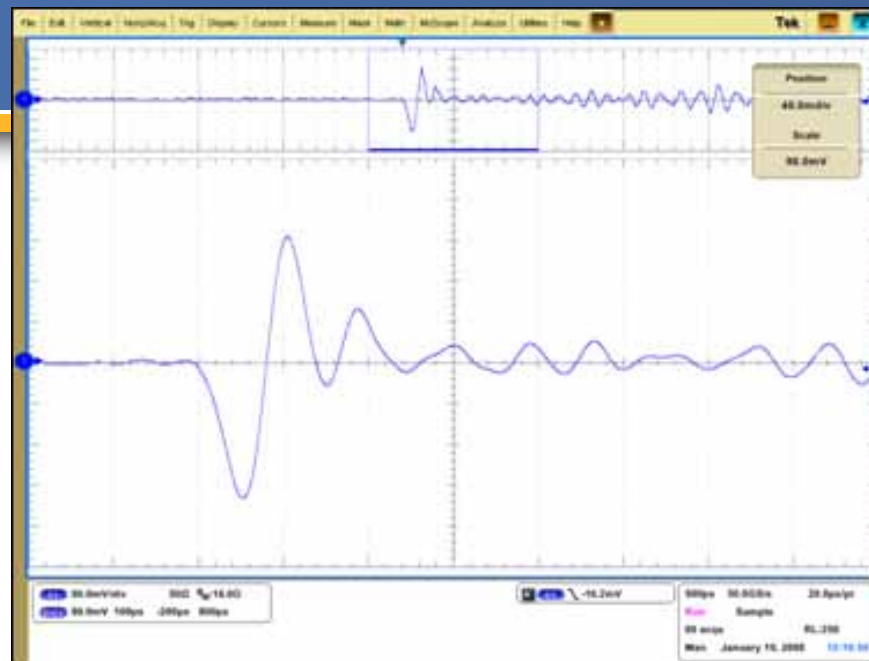


SuperKEKB FT for FB

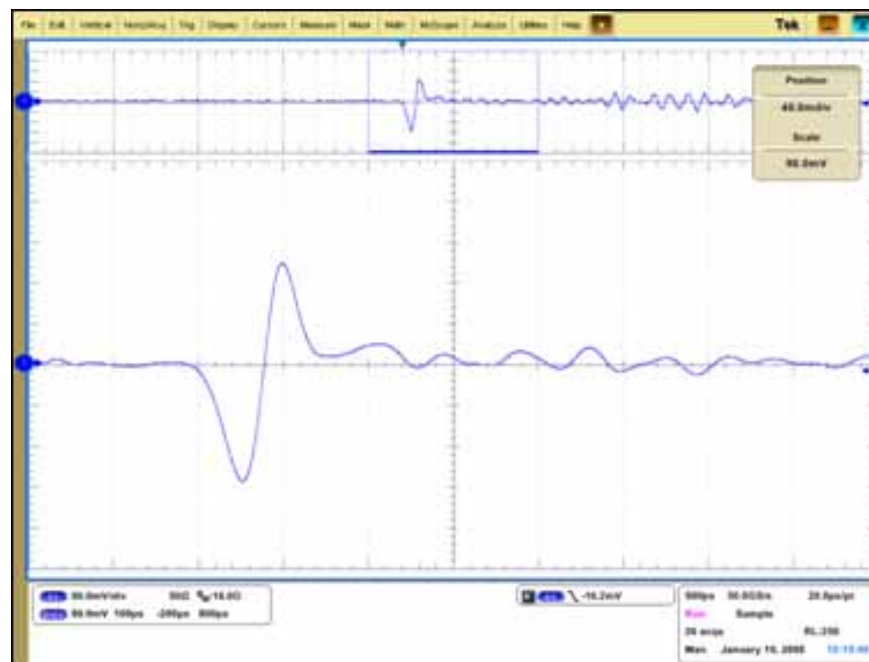

SuperKEKB Fuji straight section


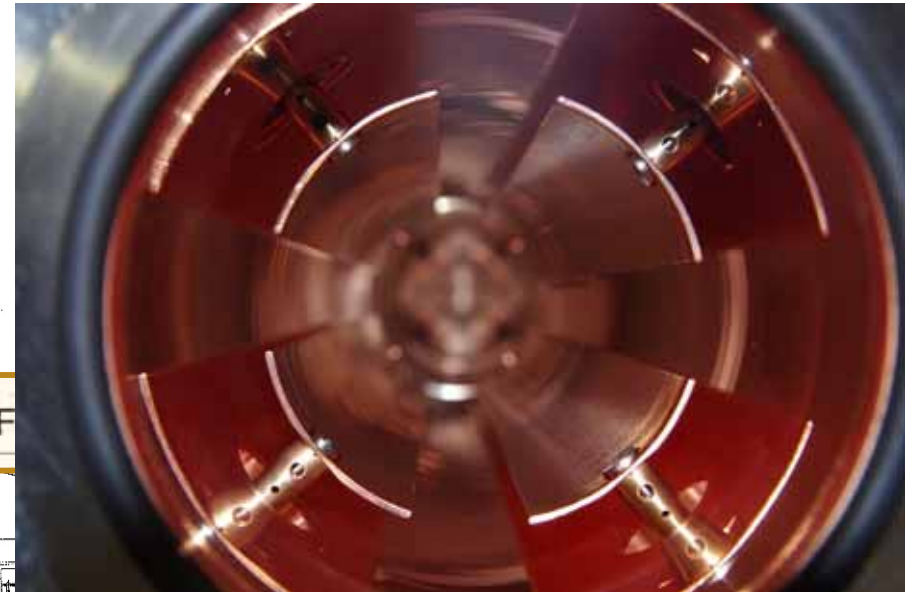


SuperKEKB Fuji straight section

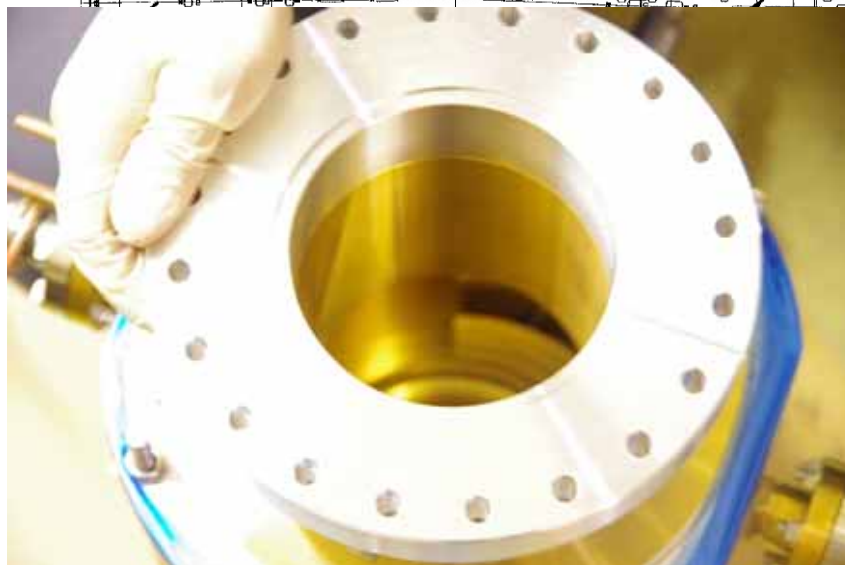


Longitudinal kicker

- 2-input, 2-output, DAFNE type kicker.
- center frequency = $2.25 \times f_{RF}$ (1150 MHz)
- Bandwidth ~ 250MHz
- 8 wideband UHF amplifiers (R&K) are working (800M-1.8GHz, $P_o=500W$).

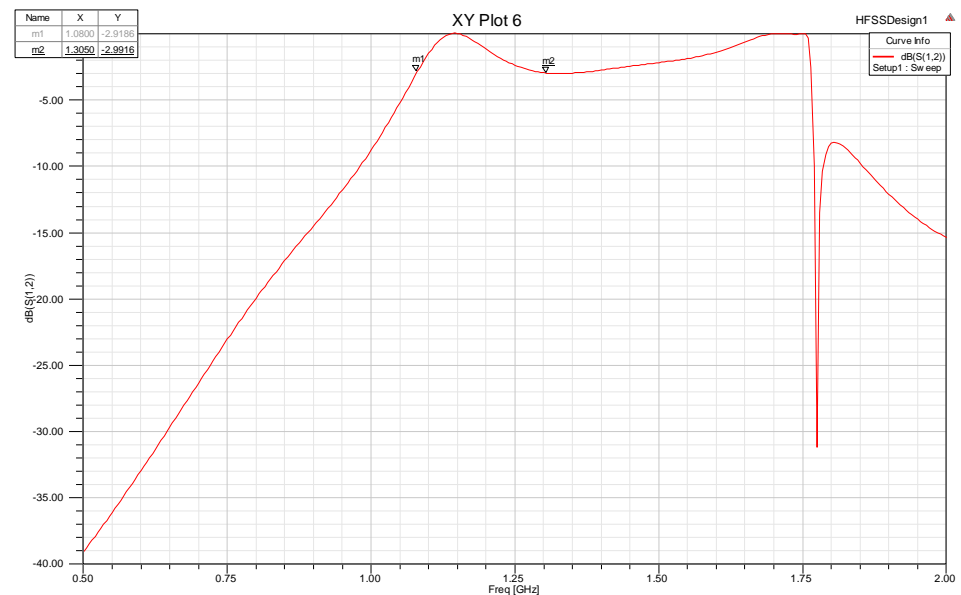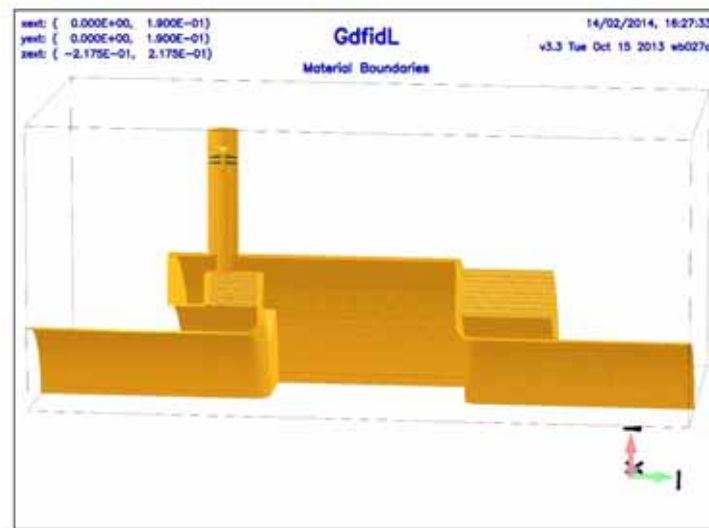


$Q \sim 5$, $R_{sh} \sim 1.6k\Omega$ by HFSS calculation

Original FB detector

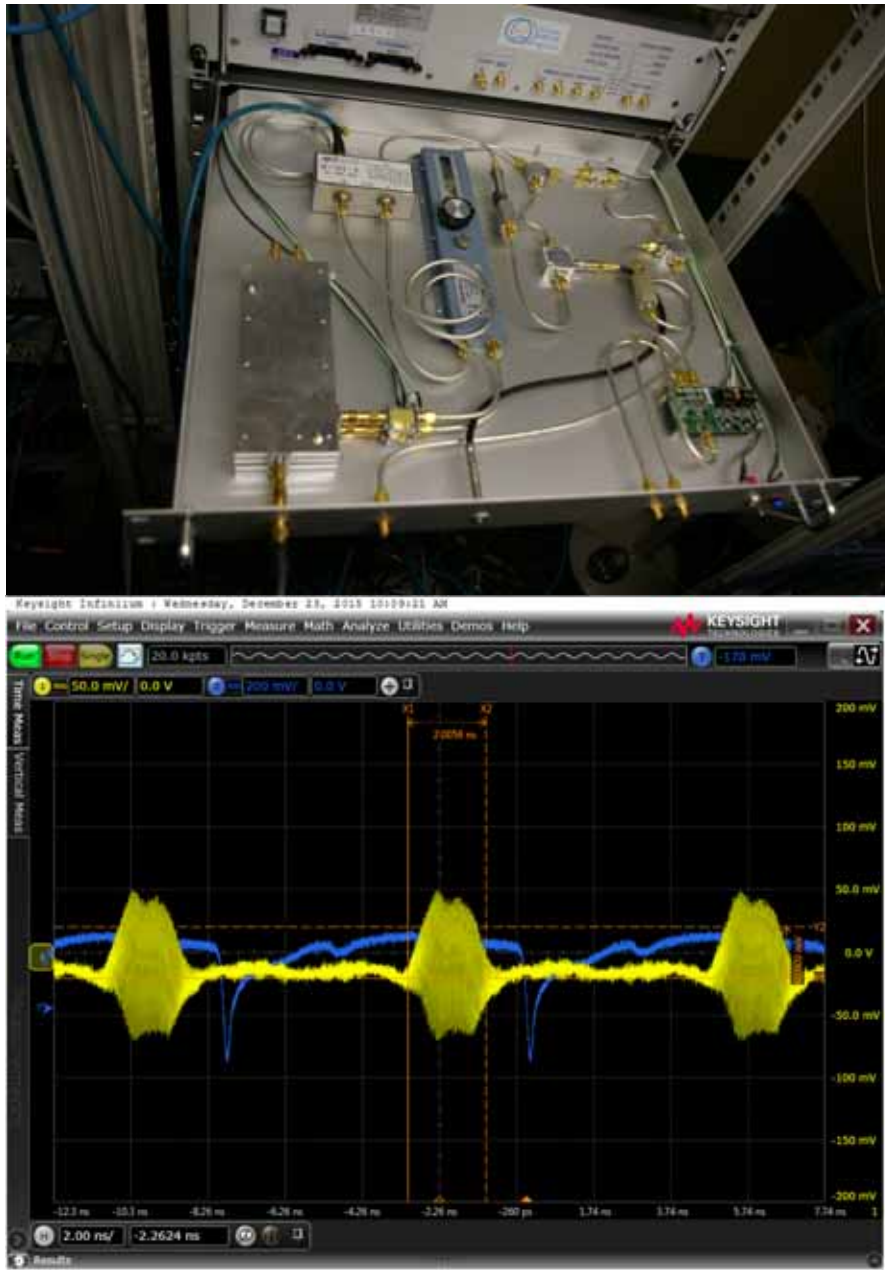


- Extract $2\text{GHz}(4x f_{\text{RF}})$ components of a bunch using 3-tap comb filter
- Adjust the timing of two signals, subtract using H-184-3 Hybrid.
- Offset cancel circuit by adding sum signal to the differential signal
- Downconvert by $4x f_{\text{RF}}$

Original FB detector(transverse)

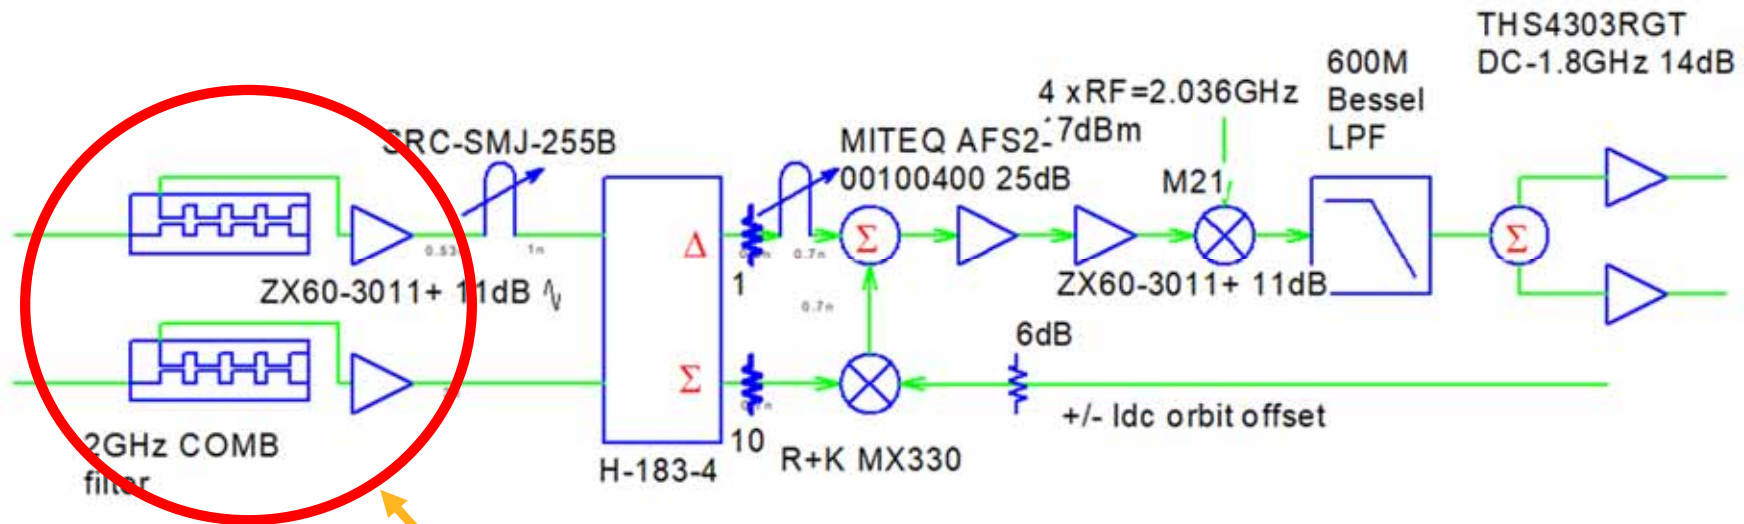


Large insertion loss (~22dB) and need additional broadband amplifiers

Original broadband noise level

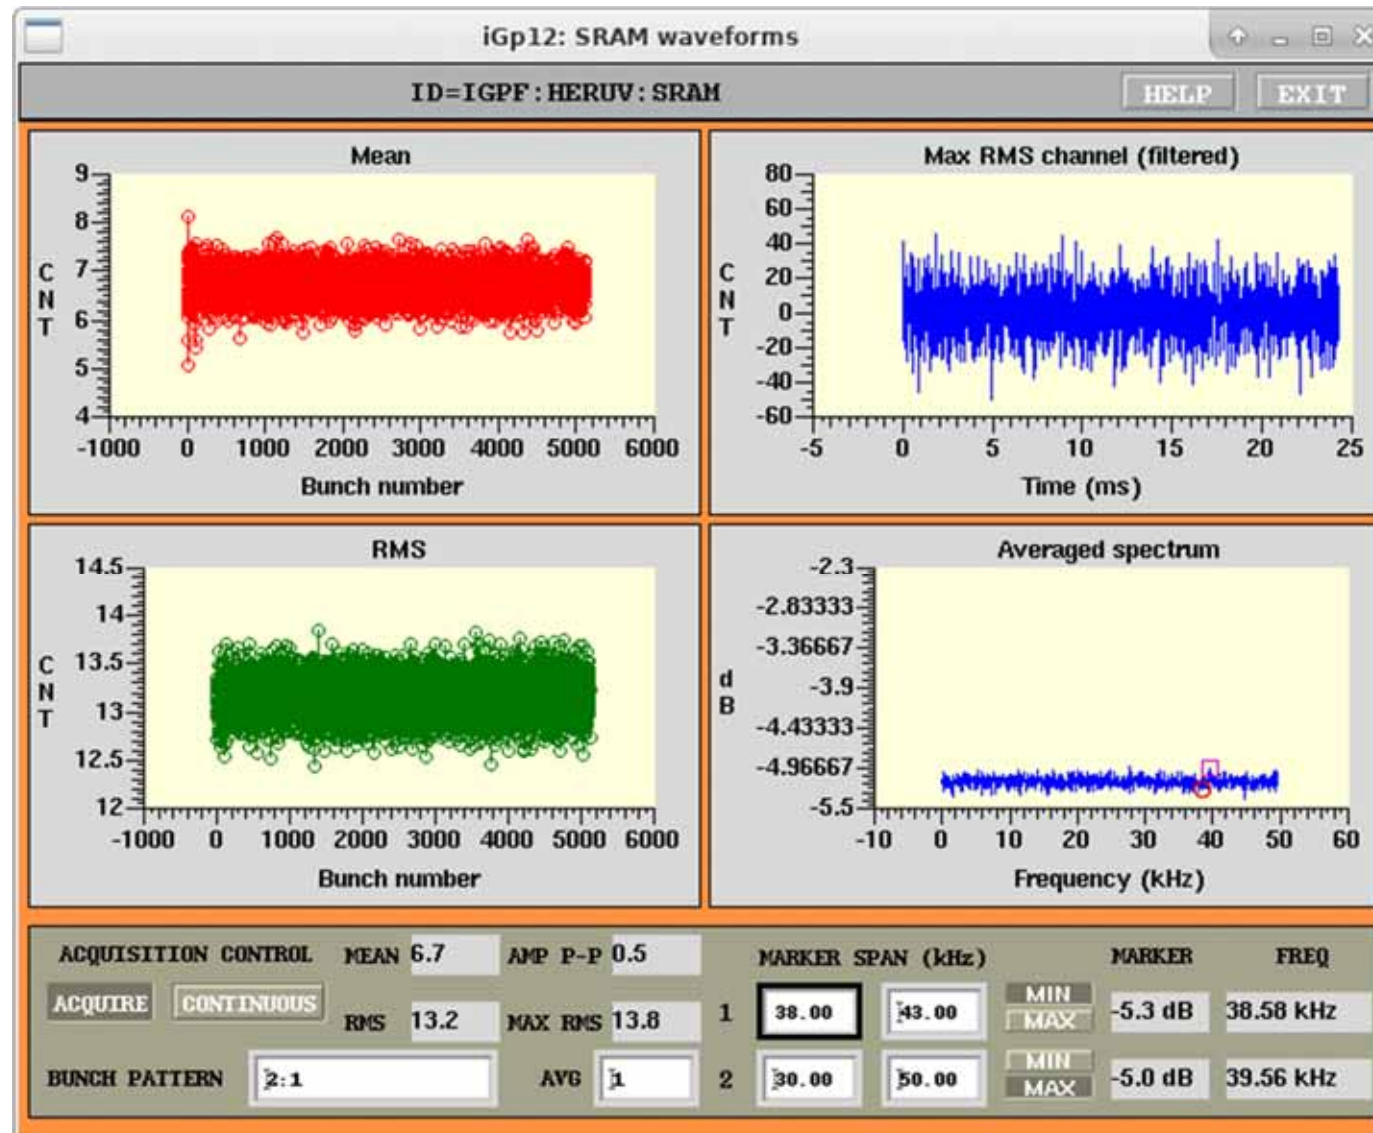


~13.2 counts in ADC of iGp12 (without beam)


same excitation voltage

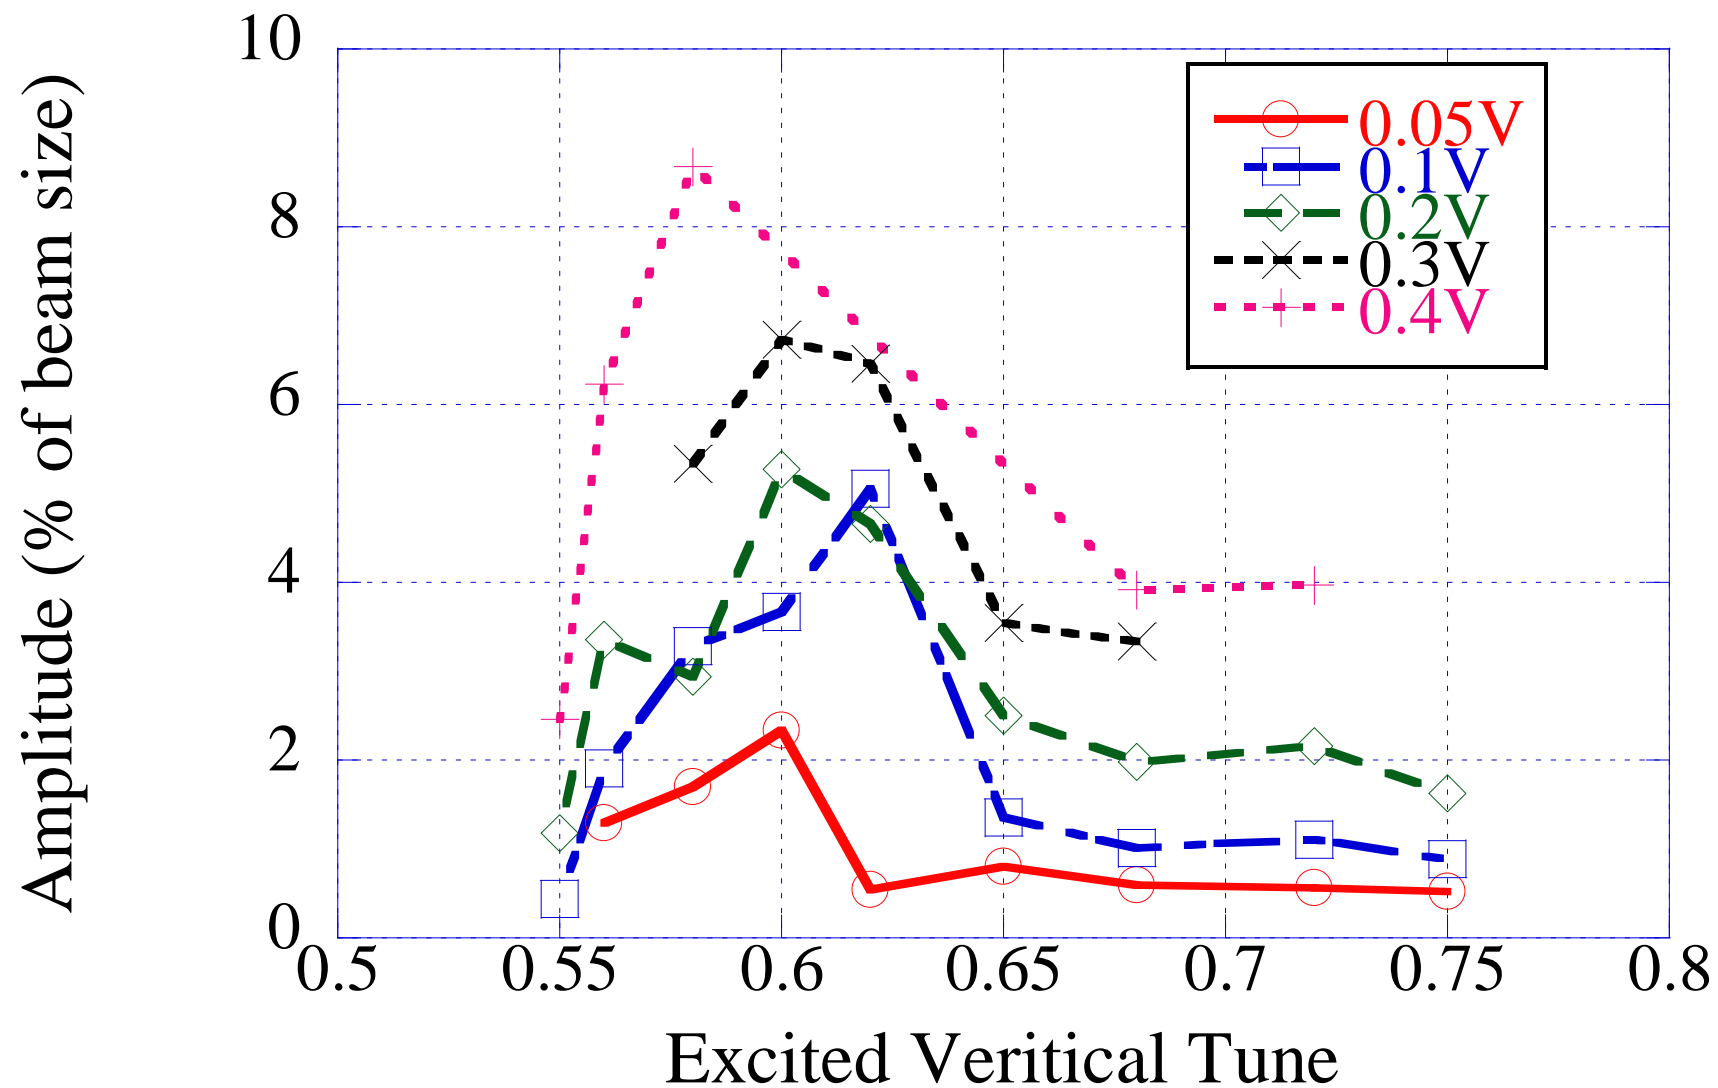


Current Detector

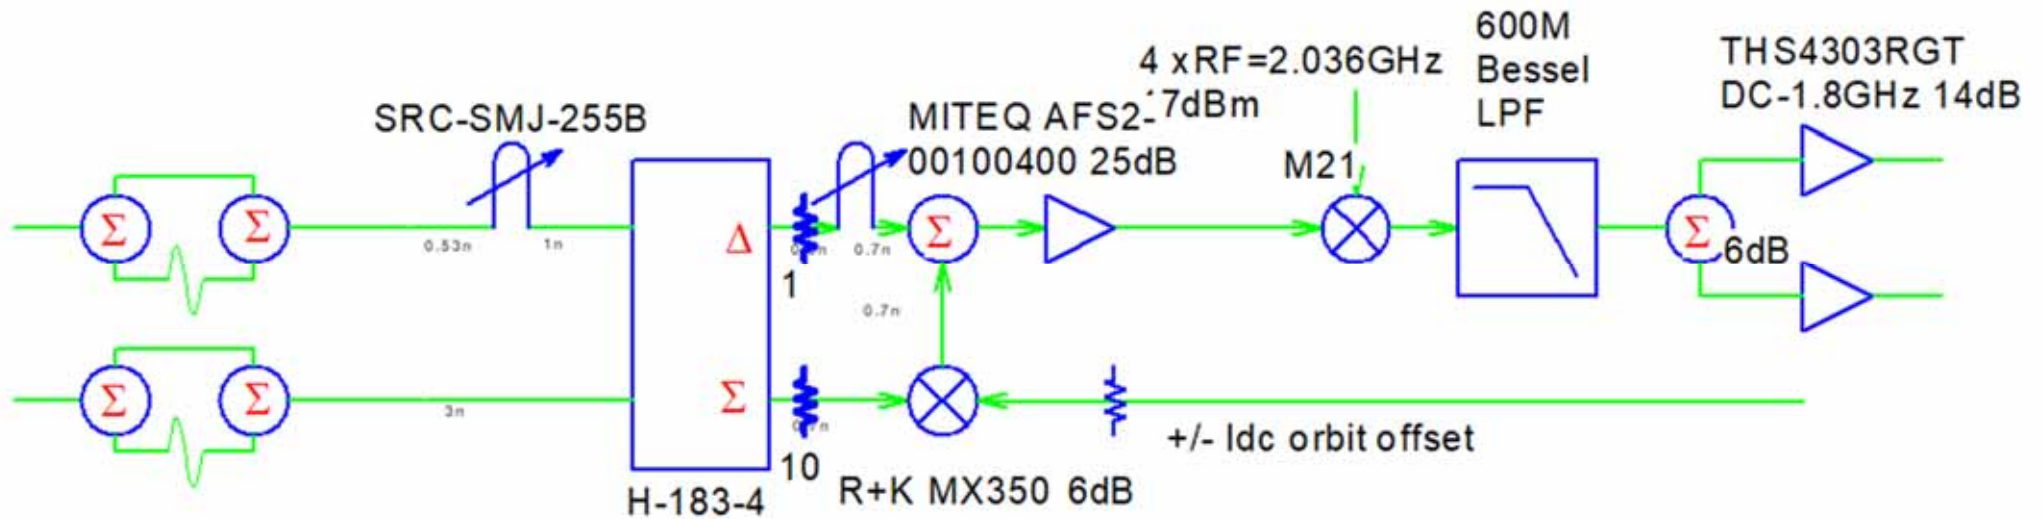


Original comb filter+amplifire

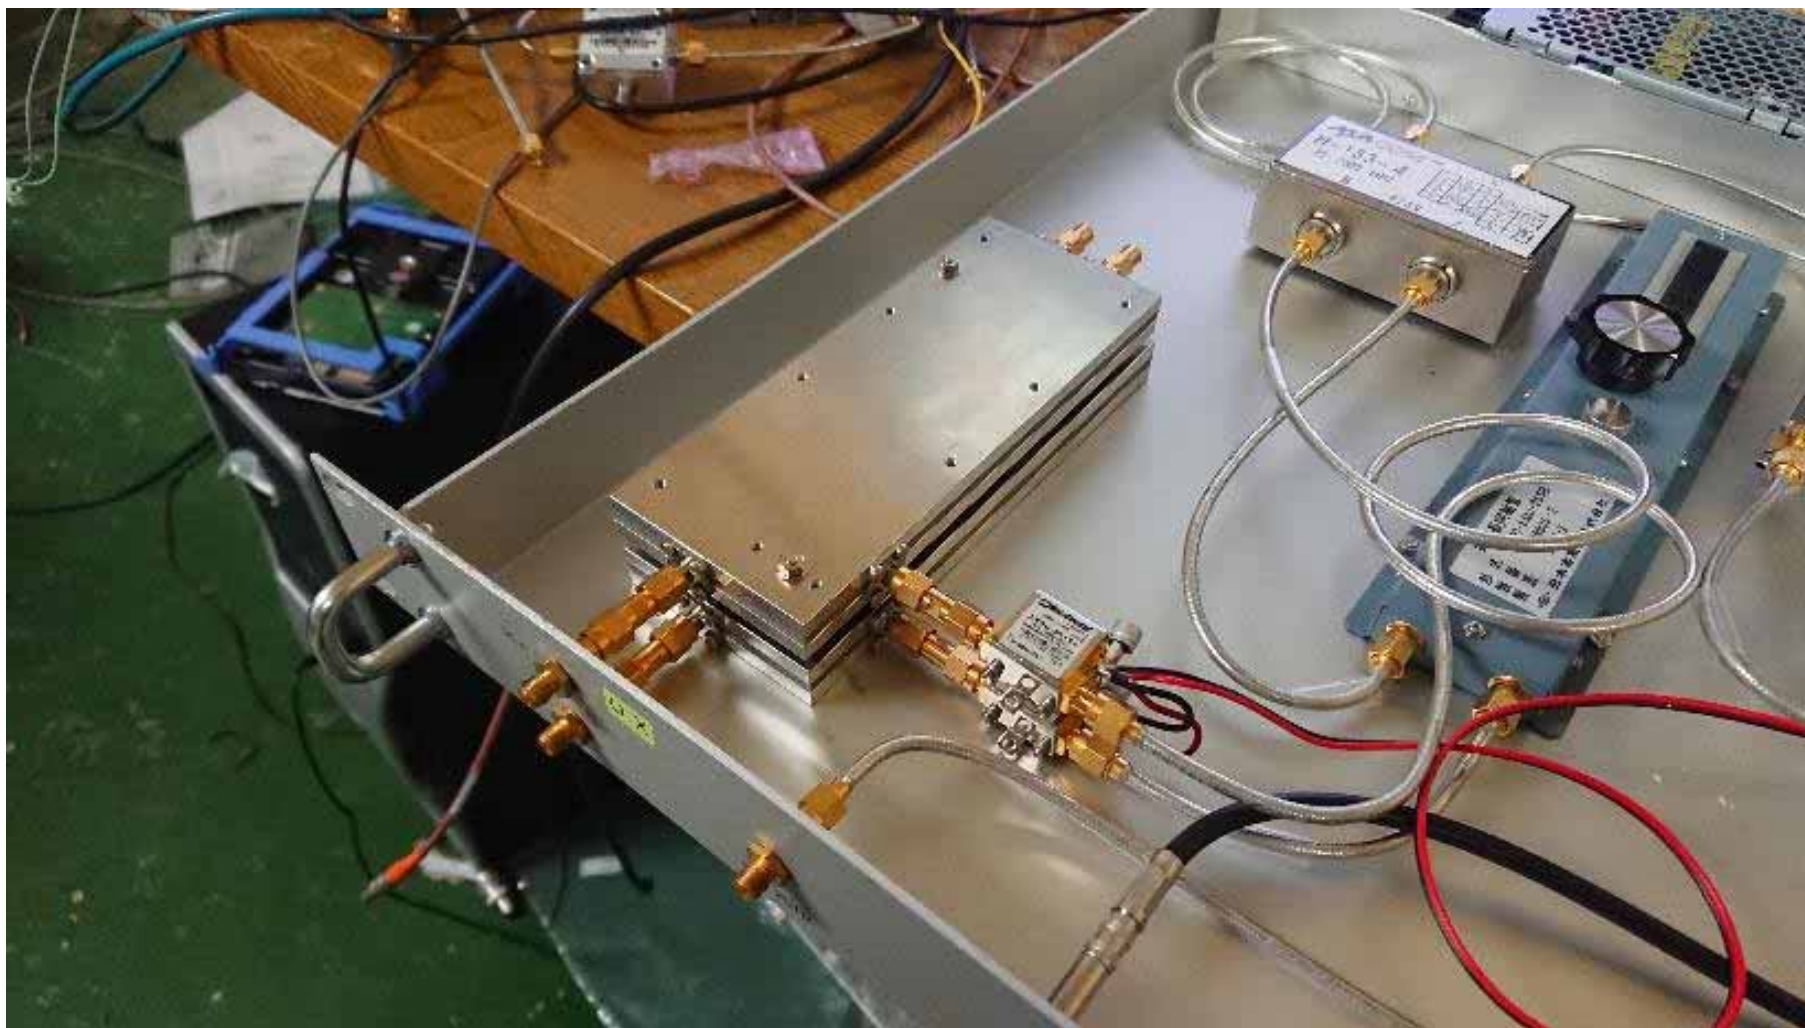

Cable type 2TAP BPF

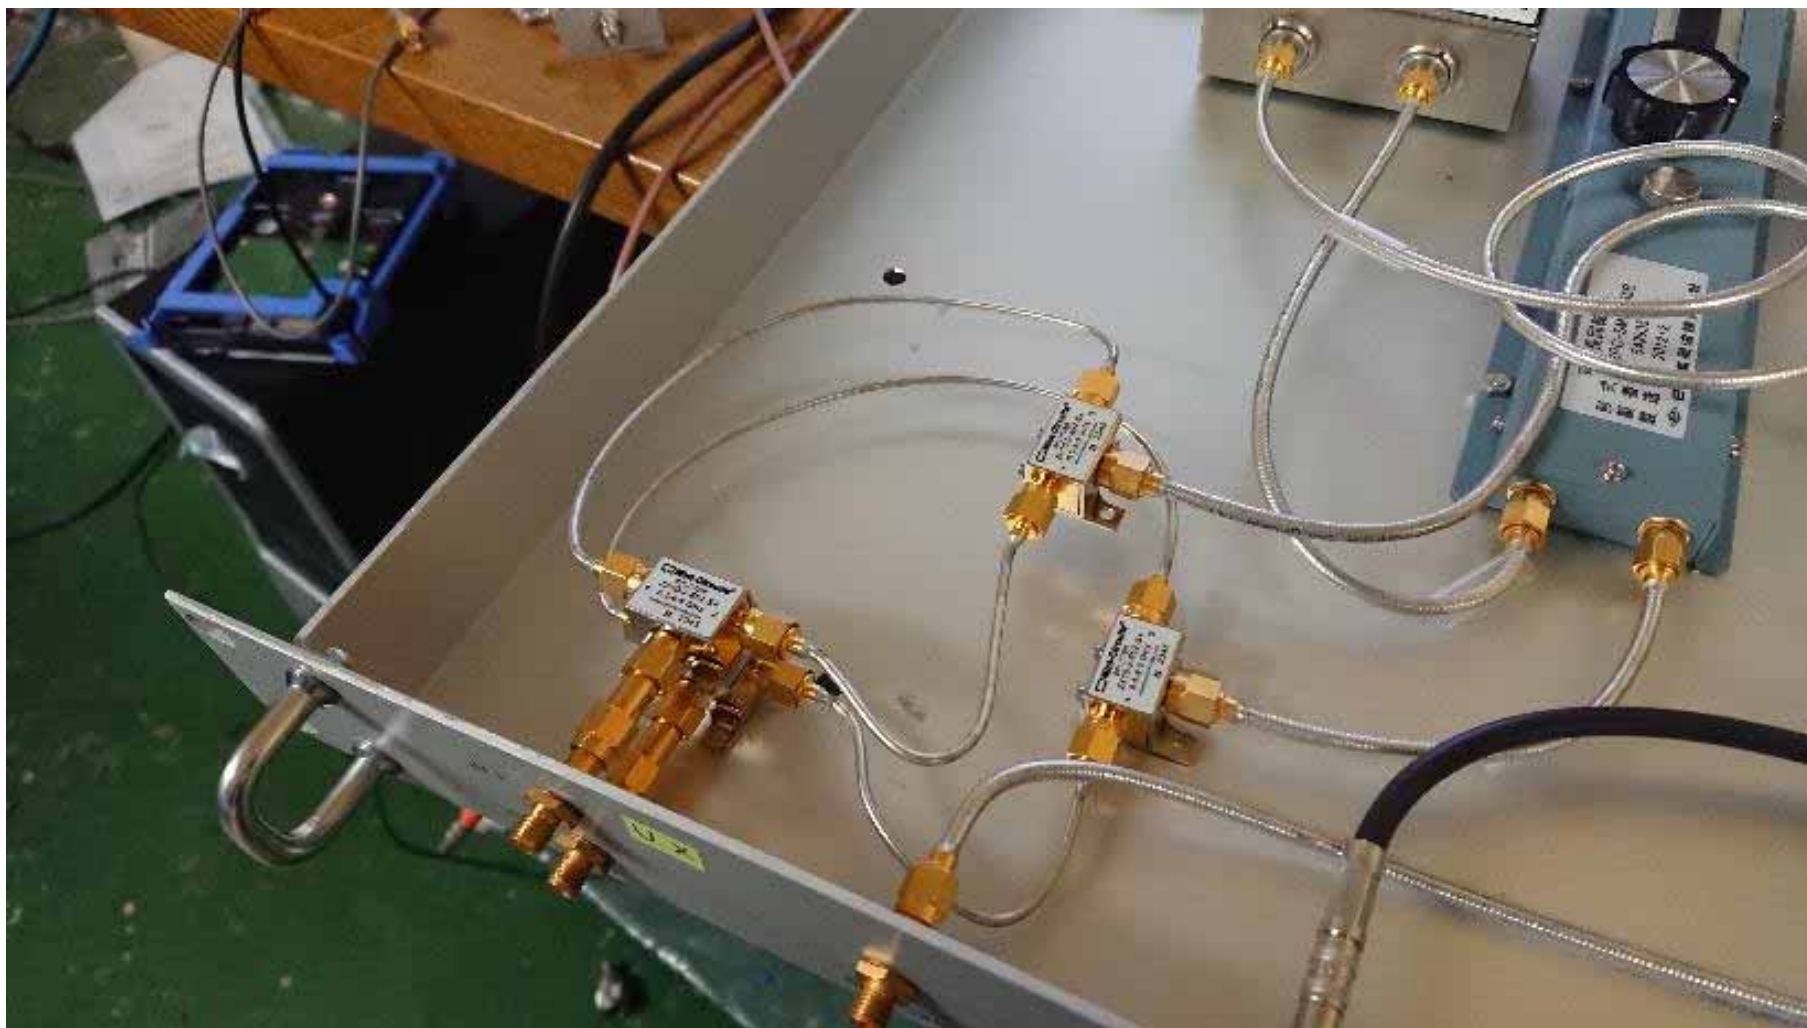


Noise level

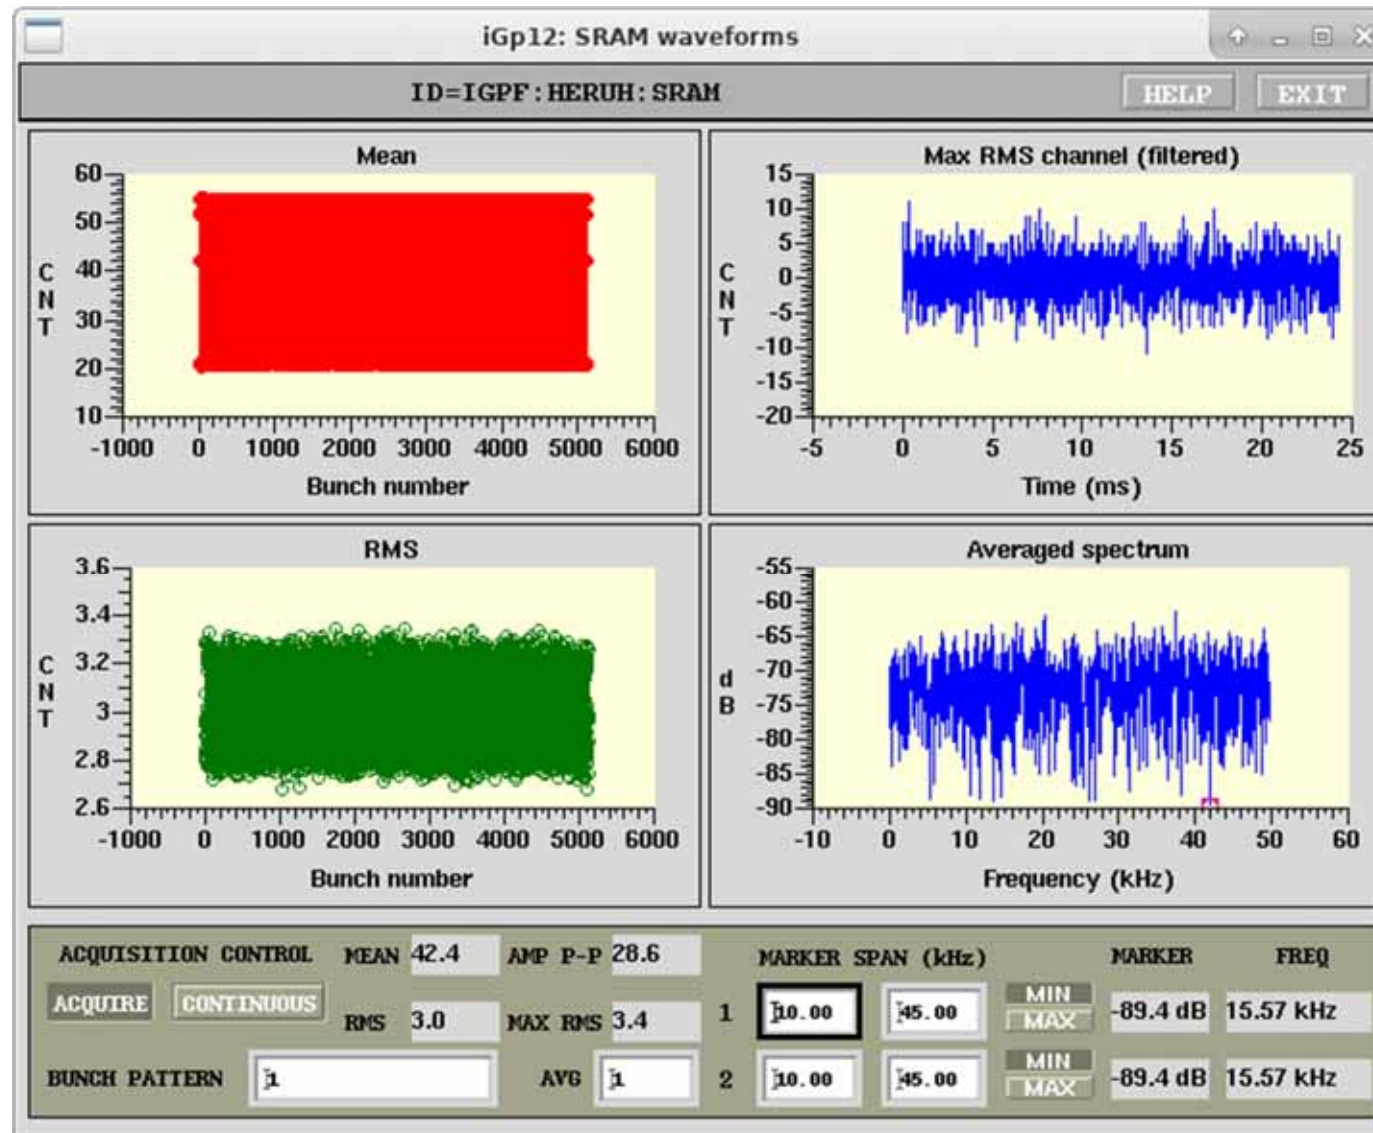


Improved RMS 13->3

Detector output/sensitivities

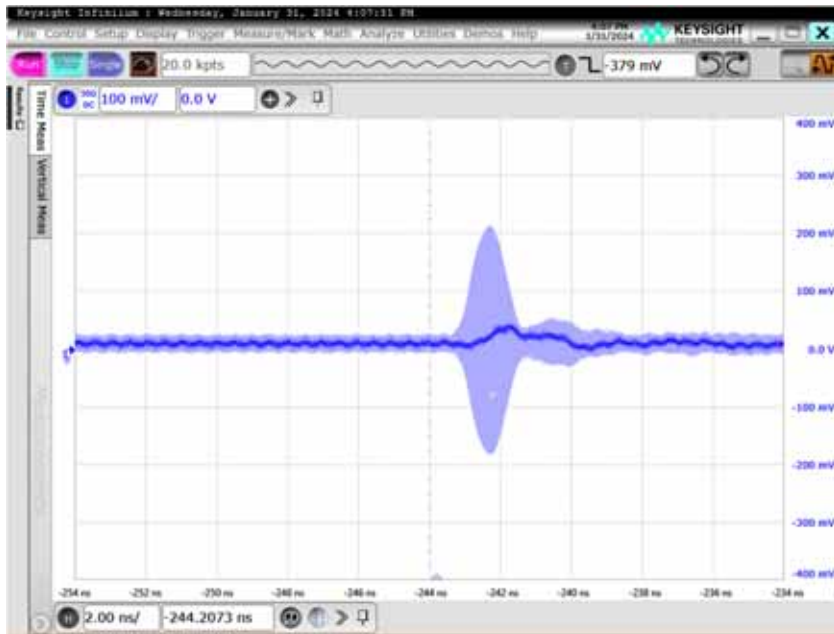

Dynamic range $\leq \pm 1.5\text{mm} / 0.4\text{mA}$ @FB detector

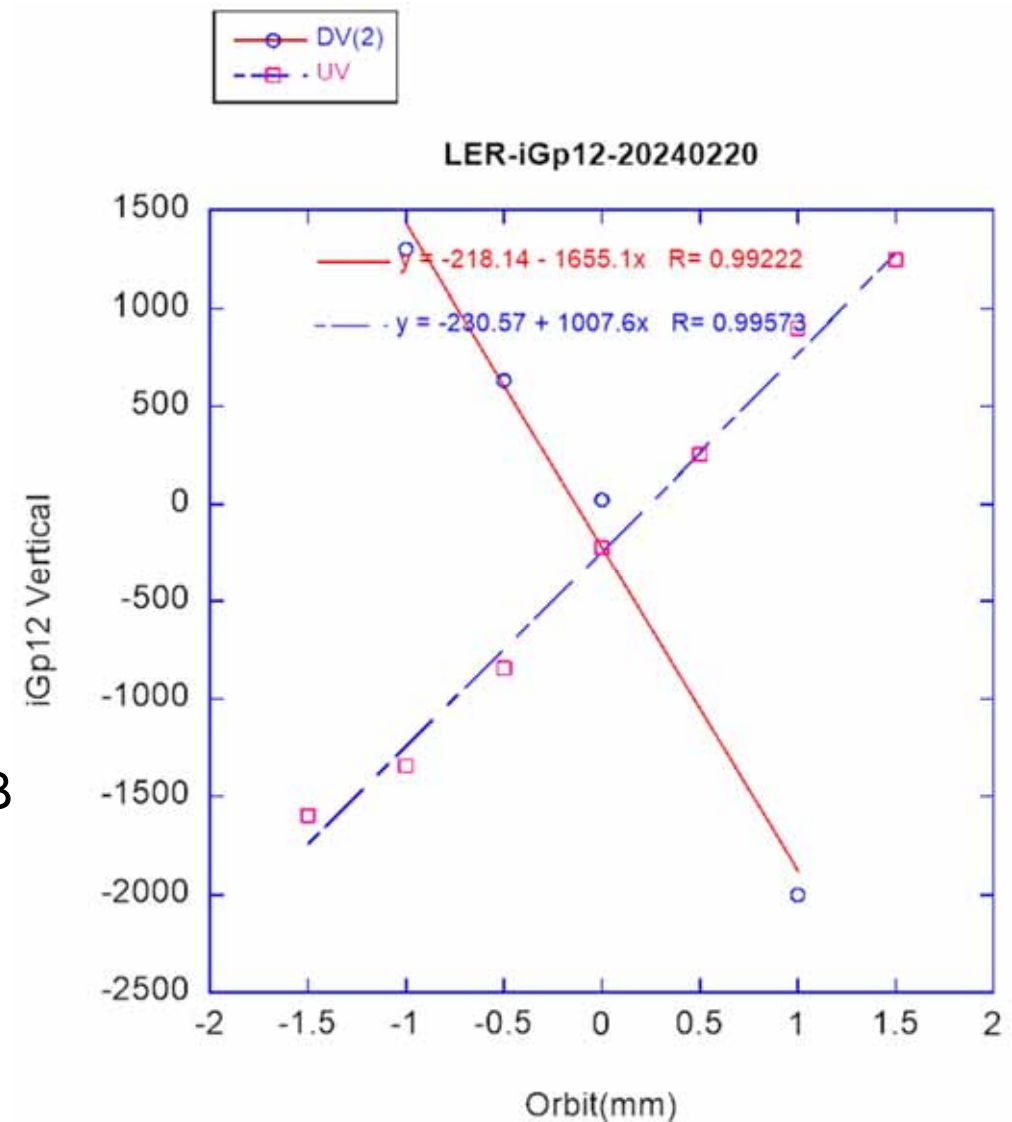



iGp12 Feedback processors (DimTel)



5 for LER (UH UV DH DV L)
5 for HER (UH UV DH DV L)
2 for positron DR (H V): VXS50T


- 12bit ADC/DAC
- Virtex5 FPGA
VXS95T
- 18 tap FIR(h=5120)
- 12MB SRAM (transient-domain analysis)
- Single bunch beam transfer function measurements (using non-colliding bunch)

Example of direct use of FB detector signal

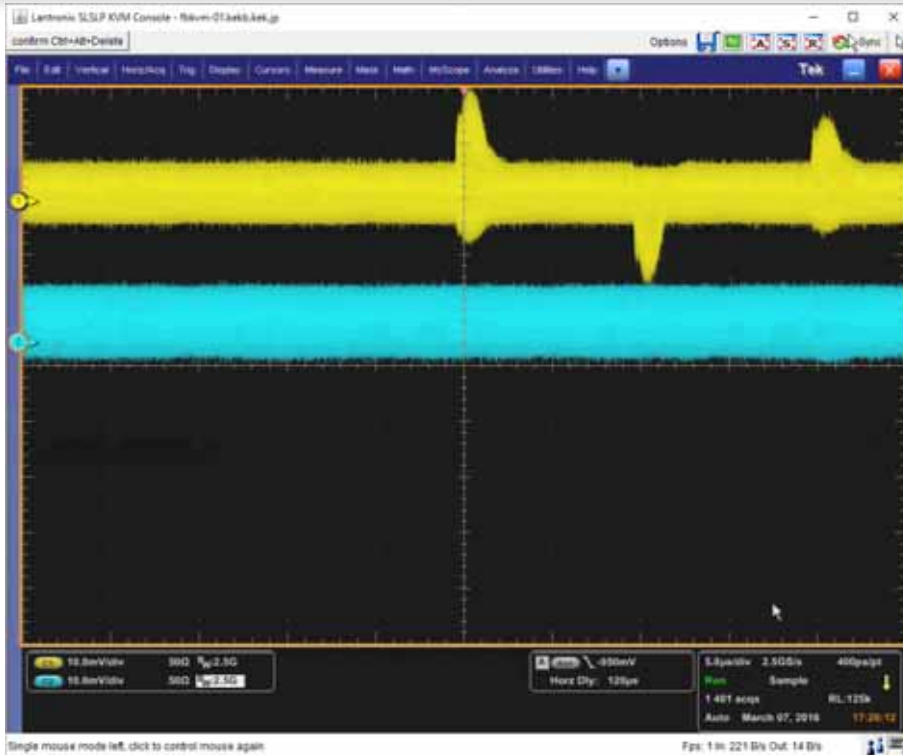


Observe FB signal using wideband oscilloscope useful to tune the residual of injection kicker bump


Betatron tune monitor (1)

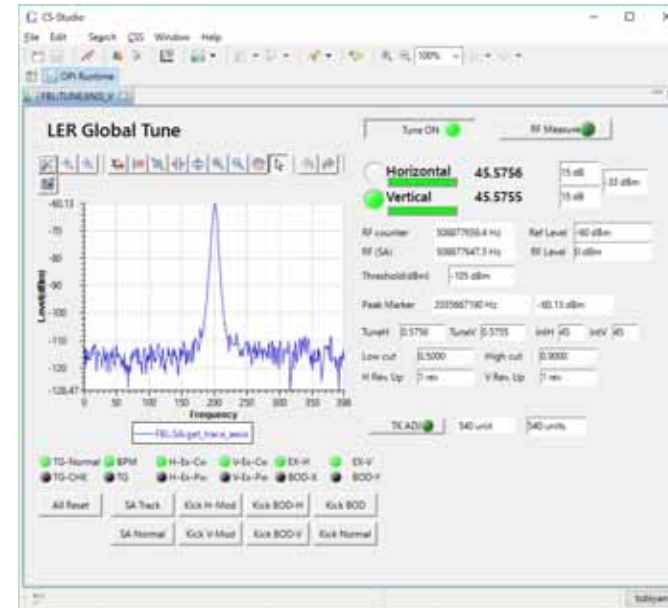



Spectrum Analyzer with Tracking Generator

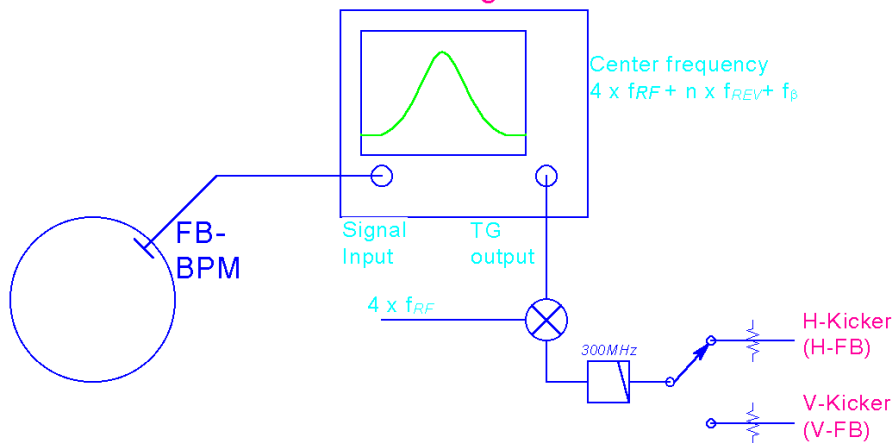

On high beam current

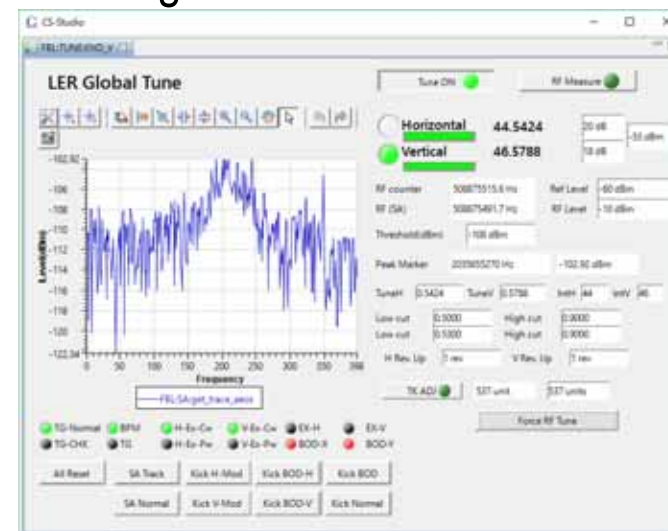

Betatron tune monitor using non-colliding bunch (pilot bunch)

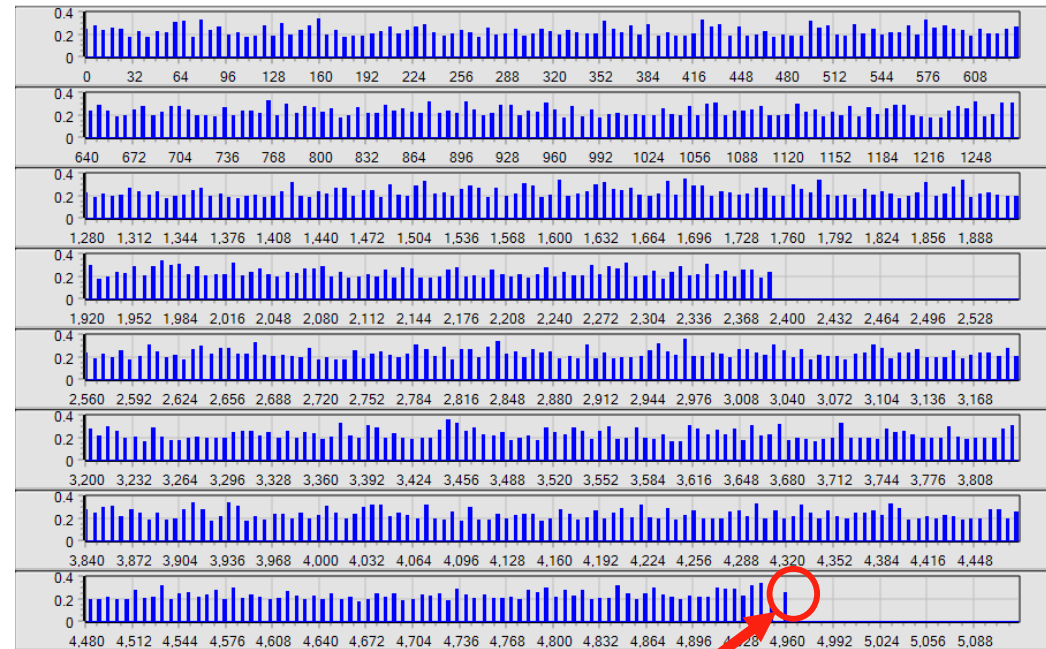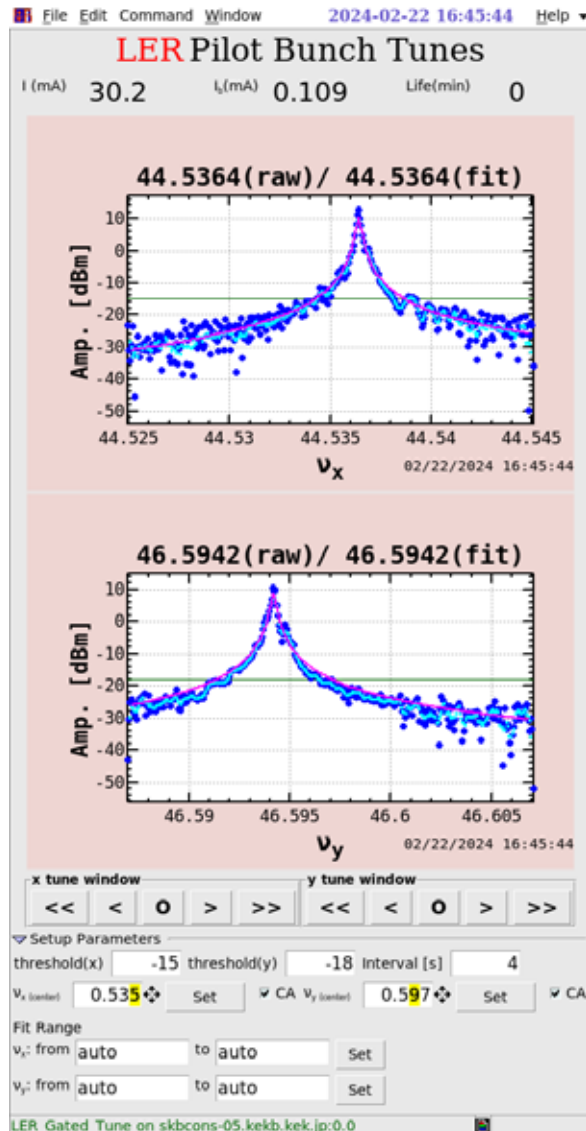


Non-colliding bunch (pilot bunch) to measure betatron tune

Bunch current monitor



- Longitudinal (intensity) detection using same L-FB detection circuit
- MAX108 8-bit ADC/Spartan6 FPGA capable to store more than 80MB(BOR) data.
- Transfer bunch current data to bucket selection system using reflective memory (VME) synchronized with injection

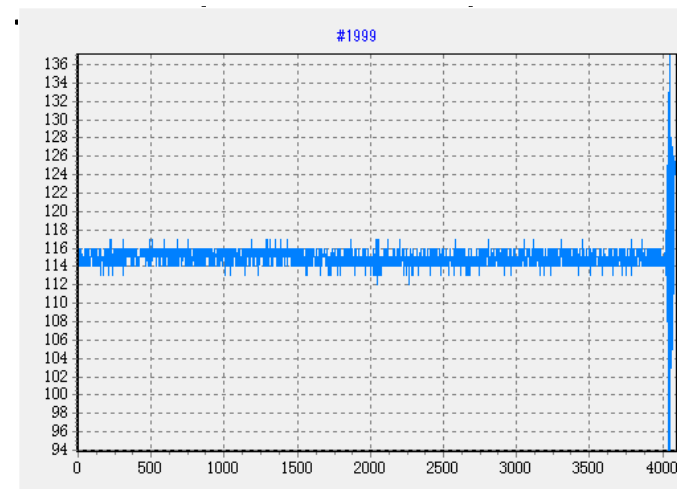

Transient-domain analysis




- **Open the feedback loop (few ms) and re-capture the oscillation by closing the loop.**
 - Could observe the “clean” unstable modes and their growthrate.
 - Understand the feedback damping rate.

Mode analysis

- Make FFT of base 5 for the oscillation data of 256 turns (5120 bunches x 256 data points) to obtain the whole spectrum.
- Extract amplitude of the spectrum that corresponds to the betatron frequencies ($f_{b+m} \times f_{rev}$), where m represents the mode of the oscillation.
- Align the amplitude by increasing order of the mode-id.
- Repeat the above the procedure while advancing the starting-point of the data by 128 turns.




G-D example for HER (e- 7GeV)

C:\Users\tobiyama\Documents\Delphi\KEKB-iGp12\Win32\Debug\2016-05-26-14-37-23.dat Mode

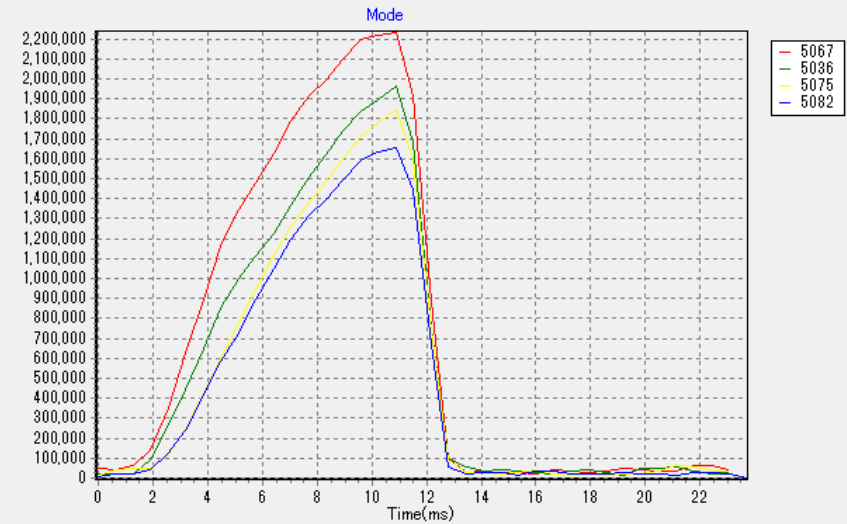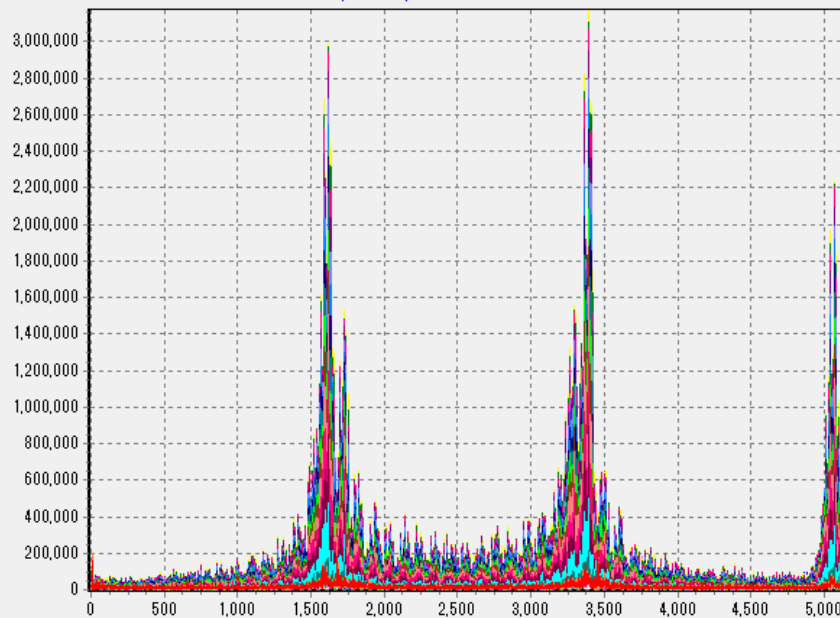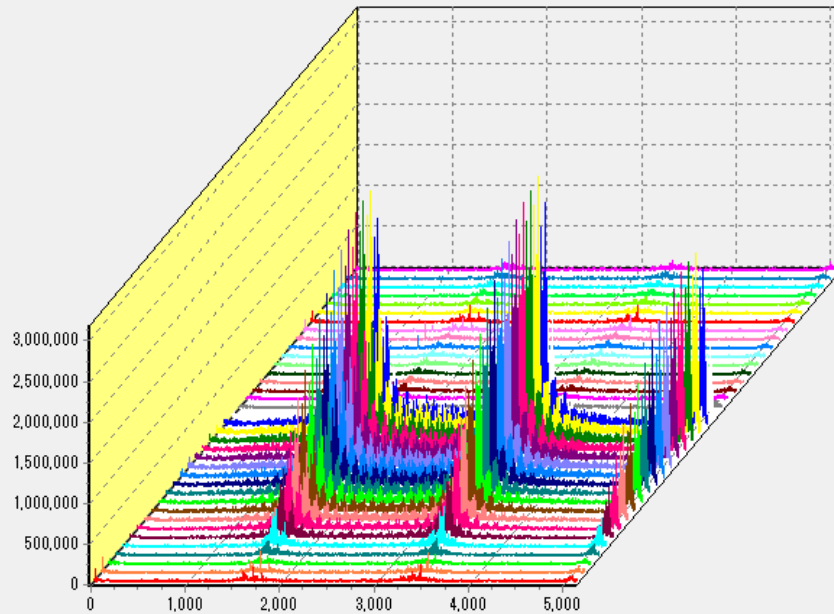




8 Tap FIR filter
 732mA, by 3 filling, 0.5mA/bunch
 Vertical
 Growth~0.9ms
 FB damping~0.5ms

Example of by 2 LER vertical (200mA)

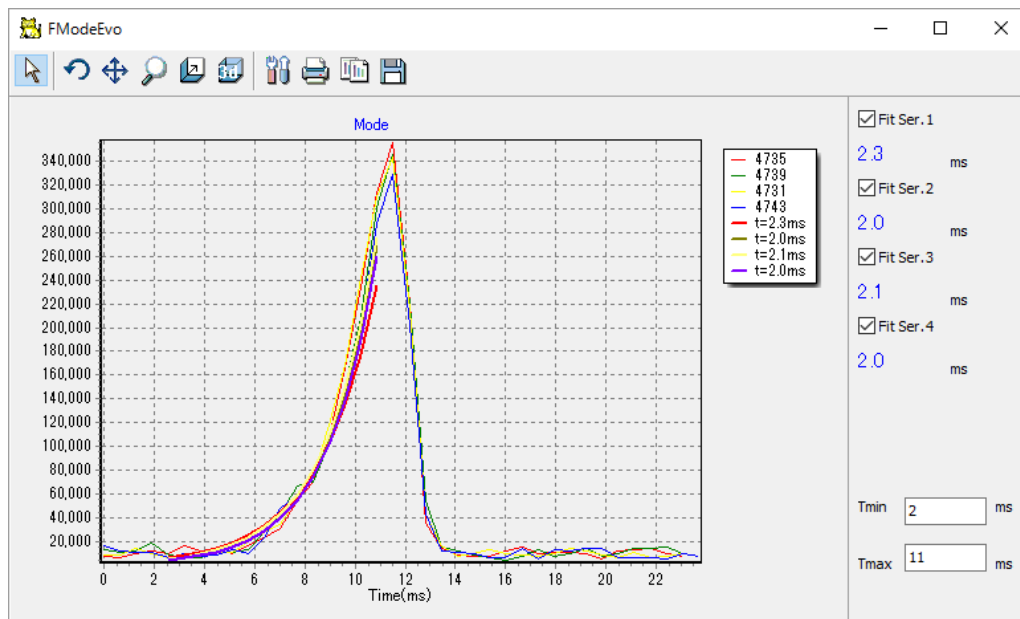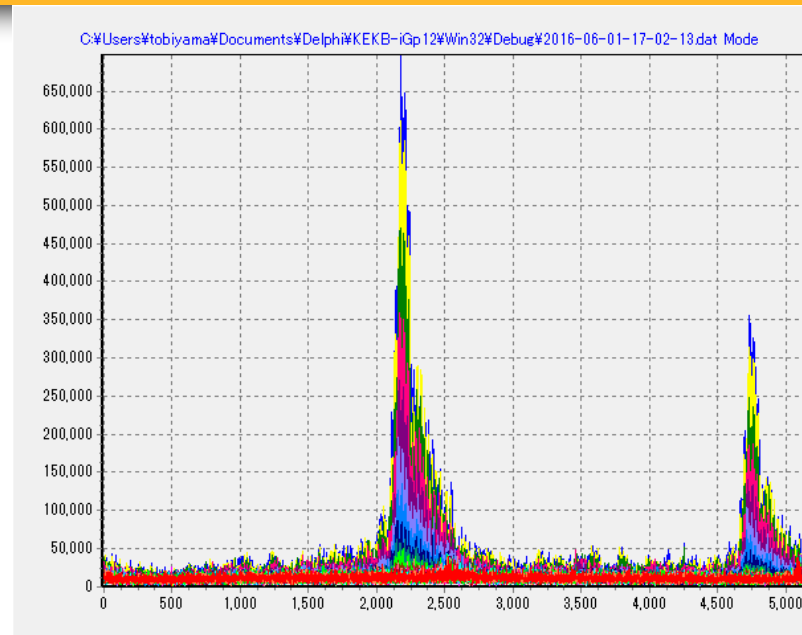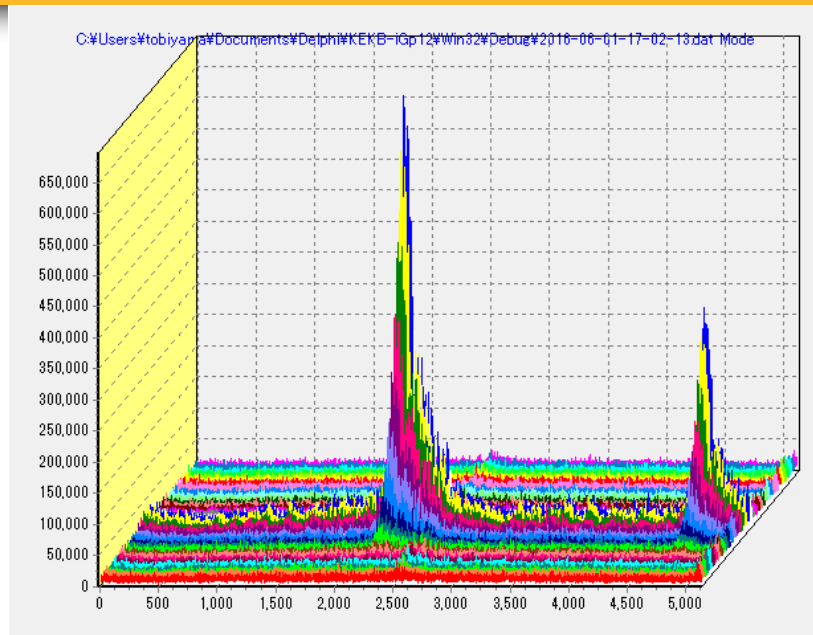


By2 200mA Vertical
Growth time~ 2.0ms
Damp < 0.5ms

By 2 (300mA) LER Horizontal

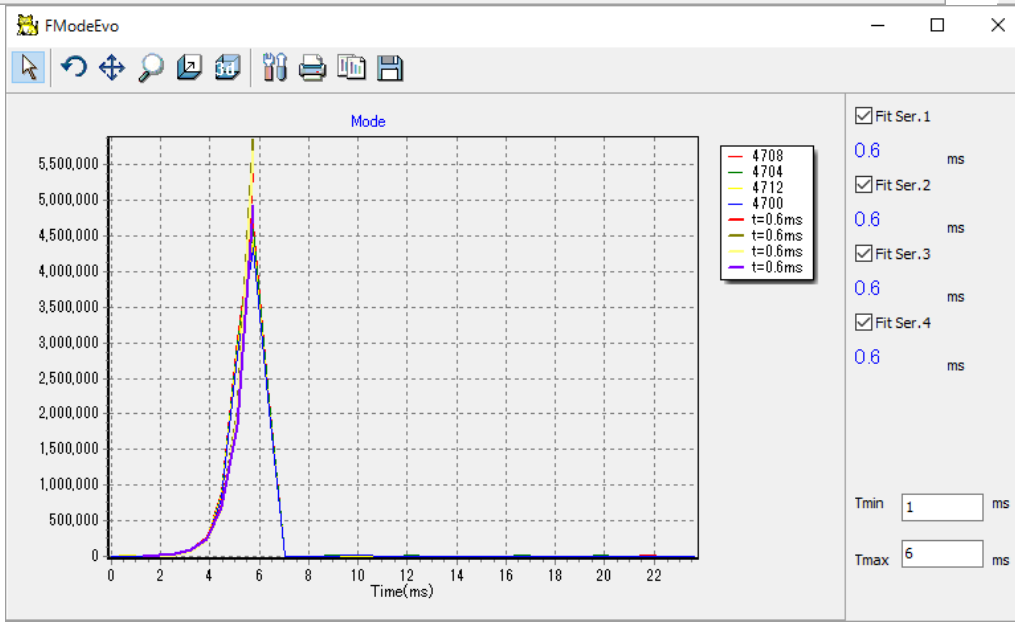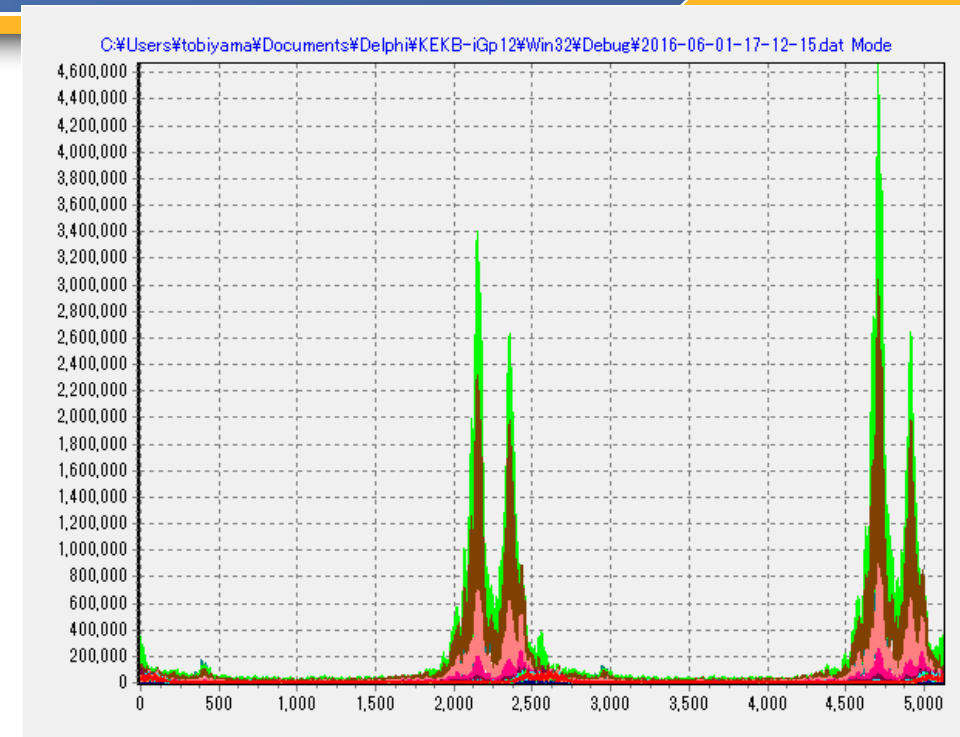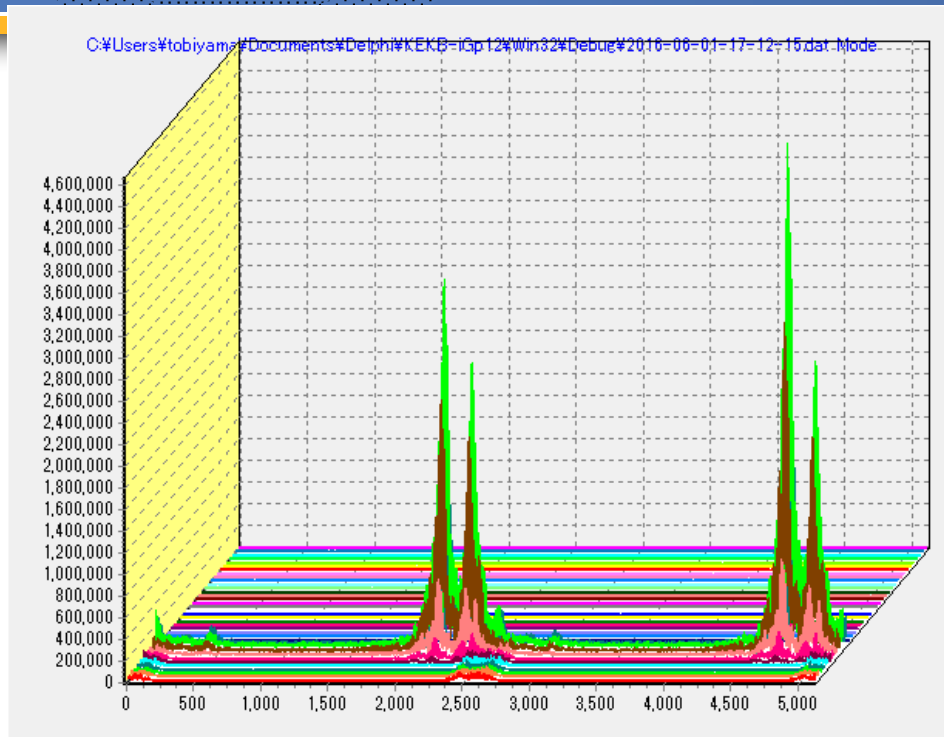


By 2 Horizontal mode
Growth ~ 0.6ms
Damp < 0.5ms

Longitudinal plane

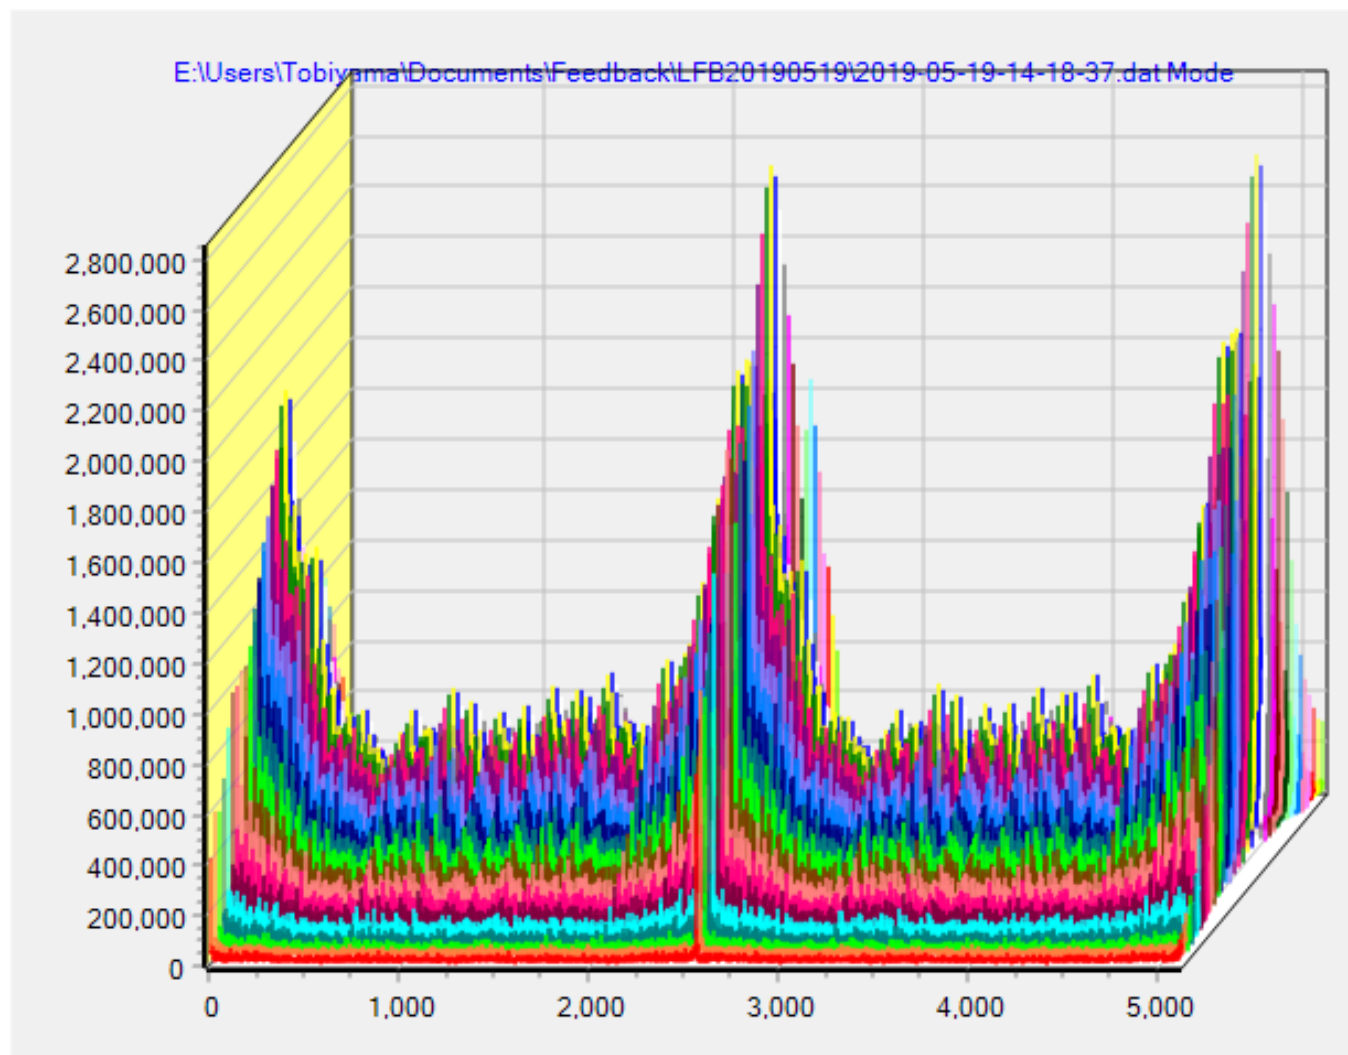


Excite-damp (by 2 pattern, 500 mA)

LFB Gain and damping rate

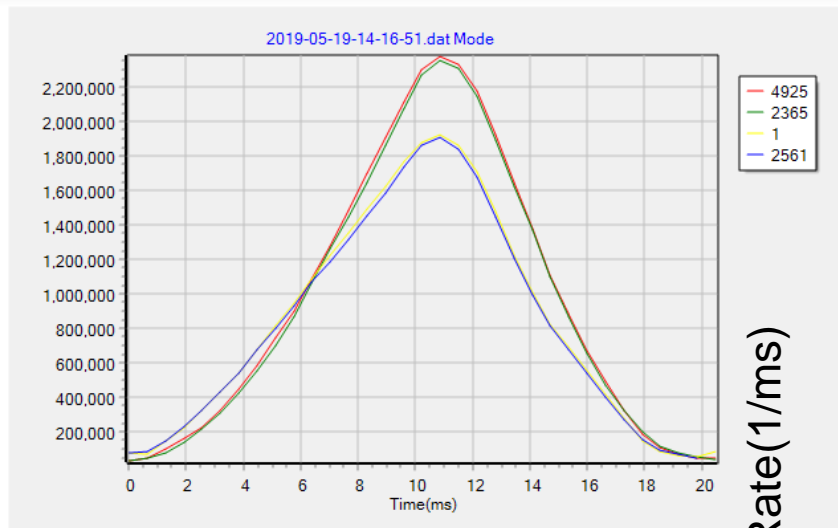

Damping Rate(1/ms)

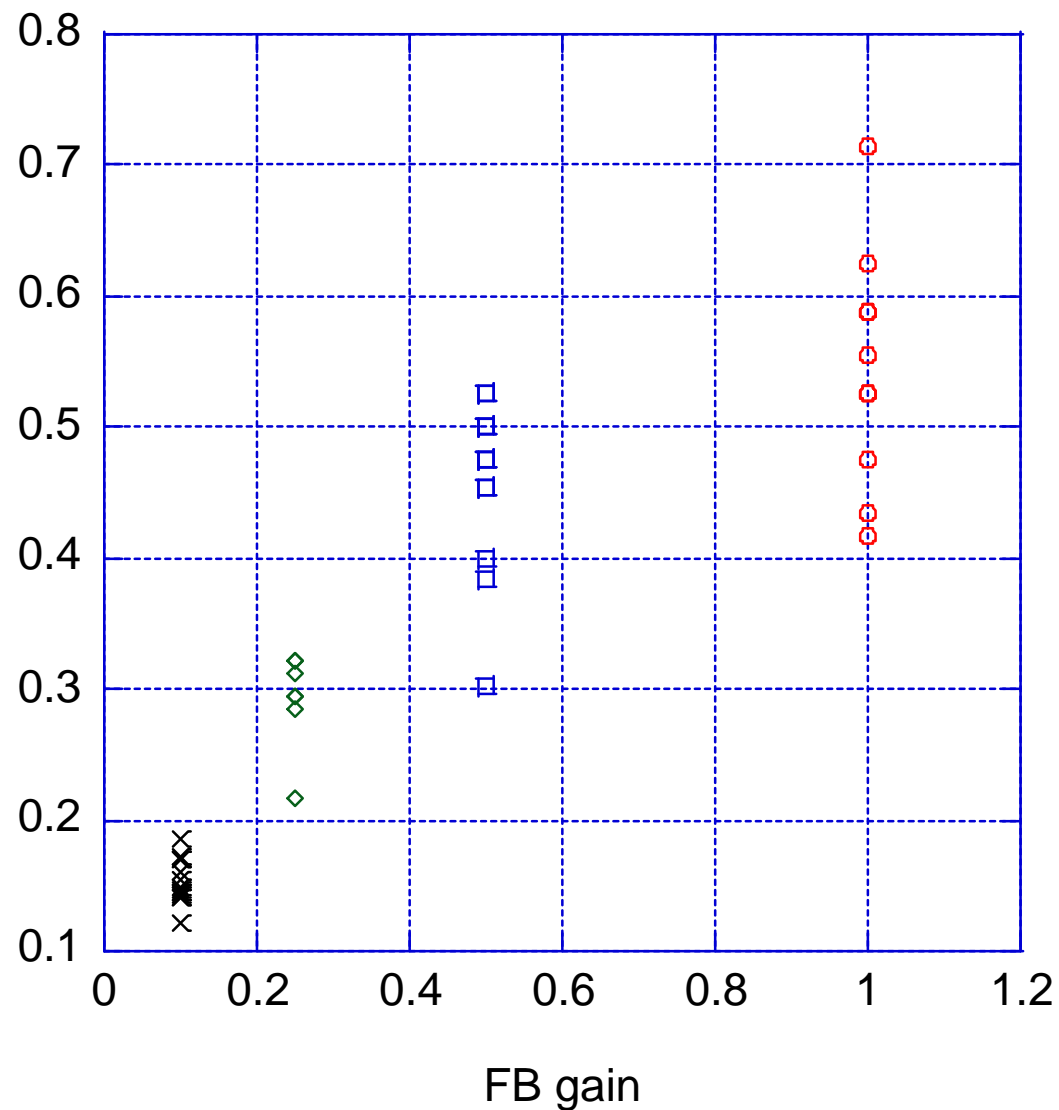

Summary

- **Bunch by bunch feedback systems for SuperKEKB rings are working well.**


Contributing to suppress the CBI (which could observe less than 30mA of total current) enabling to store more than 1A with by 2 filling pattern.

Feedback noise effect (to enlarge /excite) the bunch in vertical plane has been observed. We have replaced the bunch detector with low NF structure. They are working as expected, up to now.

- **Bunch-by-bunch monitors (bunch current monitor, bunch oscillation recorder, etc.) are also working well.**

Post-mortem recorder using iGp12 Block RAM are working.

Sudden beam loss

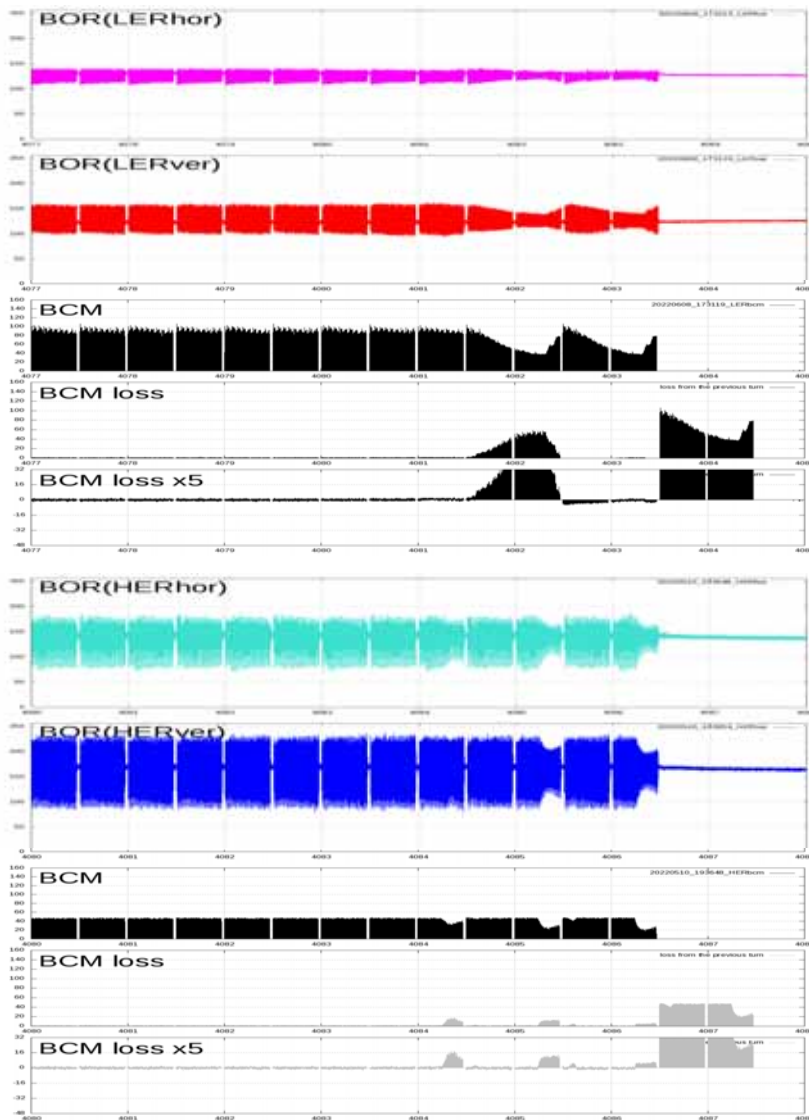


- Without growing the transverse motion, some part of bunches drops within 1-2 turns.
 - Occurs in both LER and HER, but the damage in LER is much greater (QCS quench, vertical collimator damage, etc)
 - After damaging the collimator heads, many unwanted side-effects happen.
 - Much larger background.
 - Larger transverse beam impedance.
- Several discussions on ITF-sudden beam loss subgroup.

Physical process of the “Fireball” hypothesis, leading to fast beam loss

① A microparticle with a high sublimation point is heated by the beam-induced field.

→ **Fireball**

② The fireball touches some metal surface with a low sublimation point (e.g. copper).

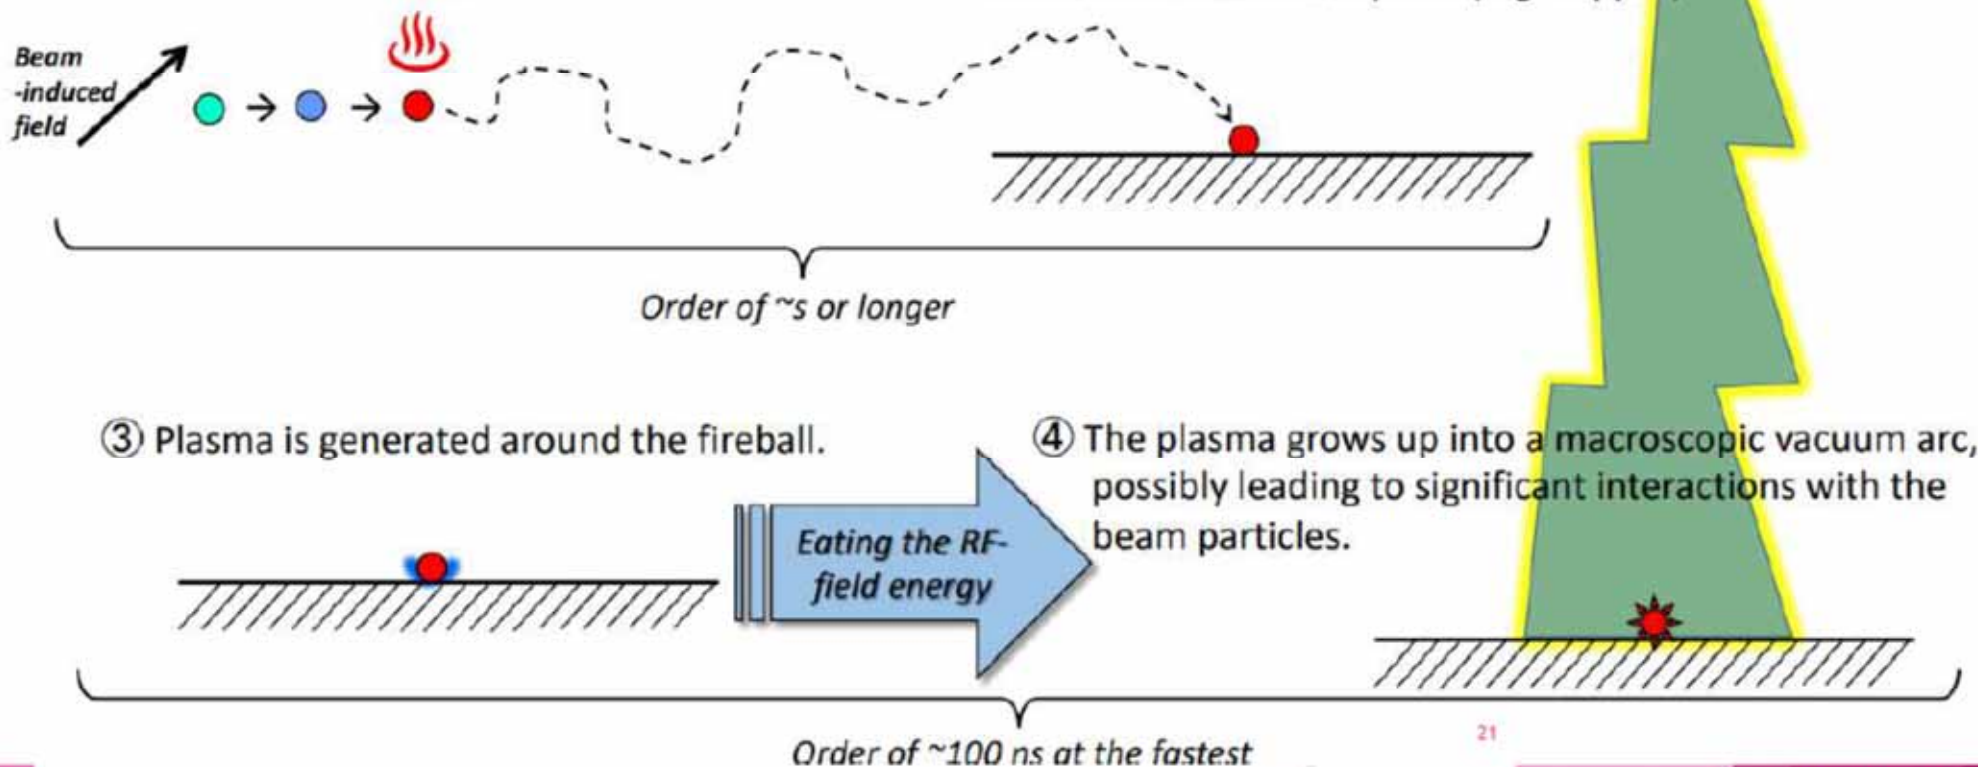

21

(T. Abe)

Backup

Broadband noise in the FB system (KEKB time)

- **The effect has first observed during the KEKB operation**

Final amplifier in the 2GHz phase shifters (all HER and LER) were modified during long maintenance time the output power had (significantly) increased. This caused the increase of the noise level of the FB detectors (also caused the increase of the feedback power).

After the maintenance, the luminosity had decreased.


Occasionally, one electrode of LER transverse feedback kicker had failed--- I've turned off one final power amplifier and observed the jumping up of the luminosity (to almost the original luminosity level)!

We've adjusted the level of the output of 2GHz phase shifter and lowered the V-FB gain.

Noise effect study at KEKB


- With the systematic study of the relations between the trans-verse feedback gains and the luminosity, we have found only LER vertical feedback gain affected the luminosity and the vertical beam size; other transverse feedback gain, LER-H, HER-H and HER-V had no obvious relation to the luminosity.
- Though the vertical beam size slowly increased (~10%) with the feedback gain during single-beam condition, it jumped up more than 40% with small change of the feedback gain during collision. The resulting luminosity decreased around 10 to 20% with the blowup of the vertical beam size.
- We have injected pure sinusoidal signals or band-limited white noises from a function generator to the V-FB system. The amplitudes of the excited oscillation of the LER beam were detected with the bunch oscillation recorders (BOR).
- [Reported at DIPAC2011 \(MOPD73\).](#)

Single frequency response (collision)

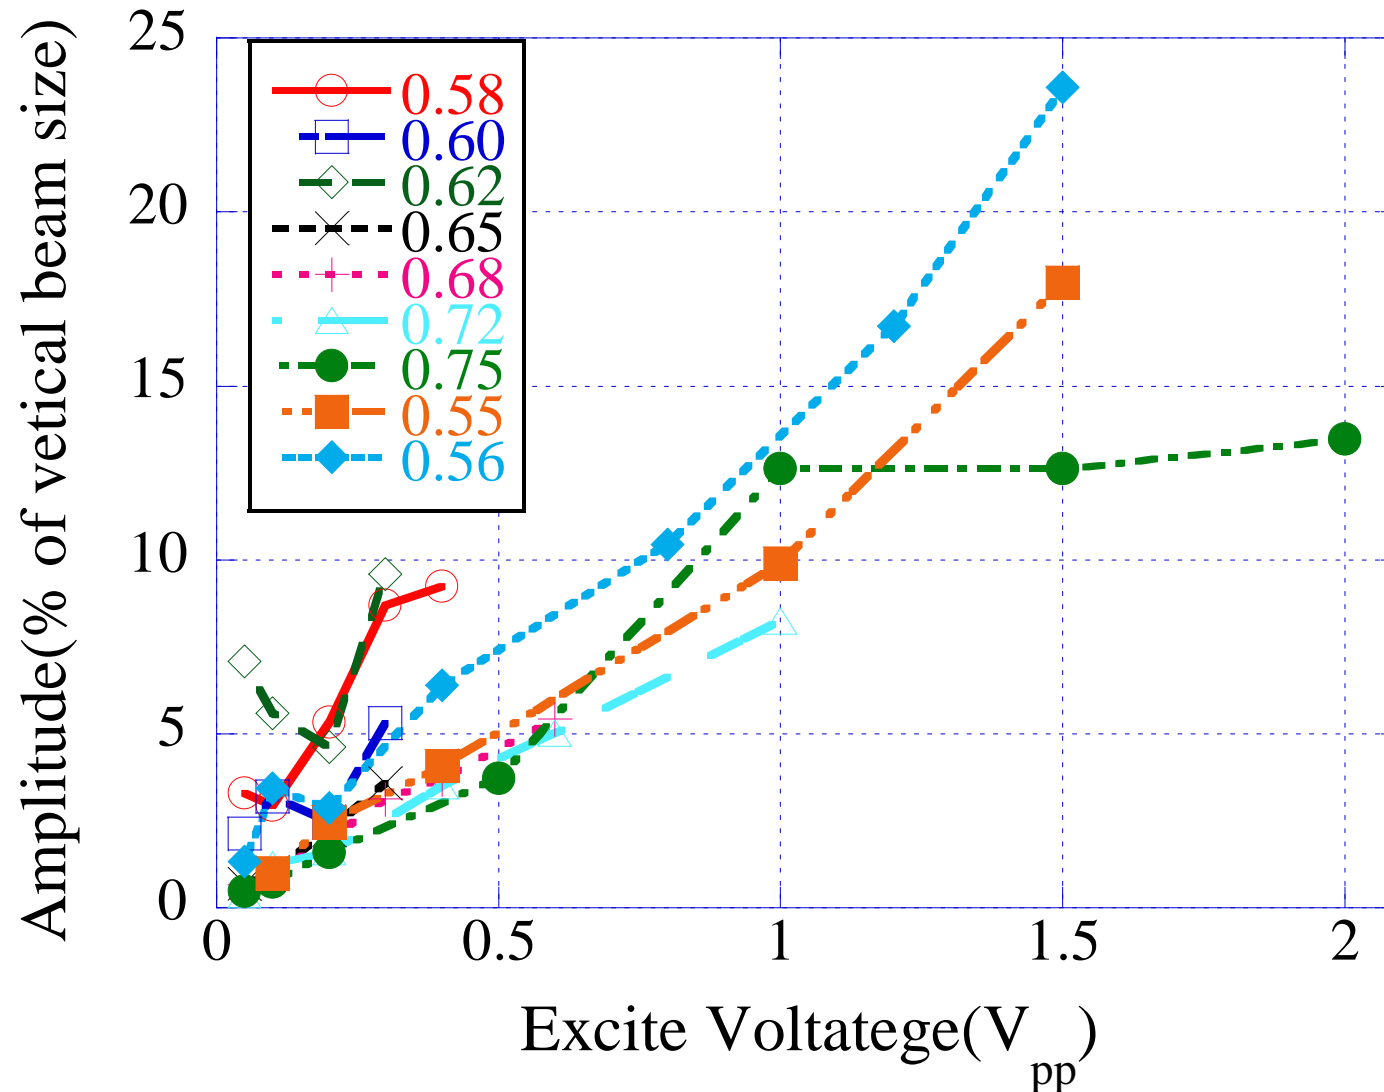




Larger response from tune (0.58) to 0.63 (tune + beam-beam tune shift)

same excitation voltage


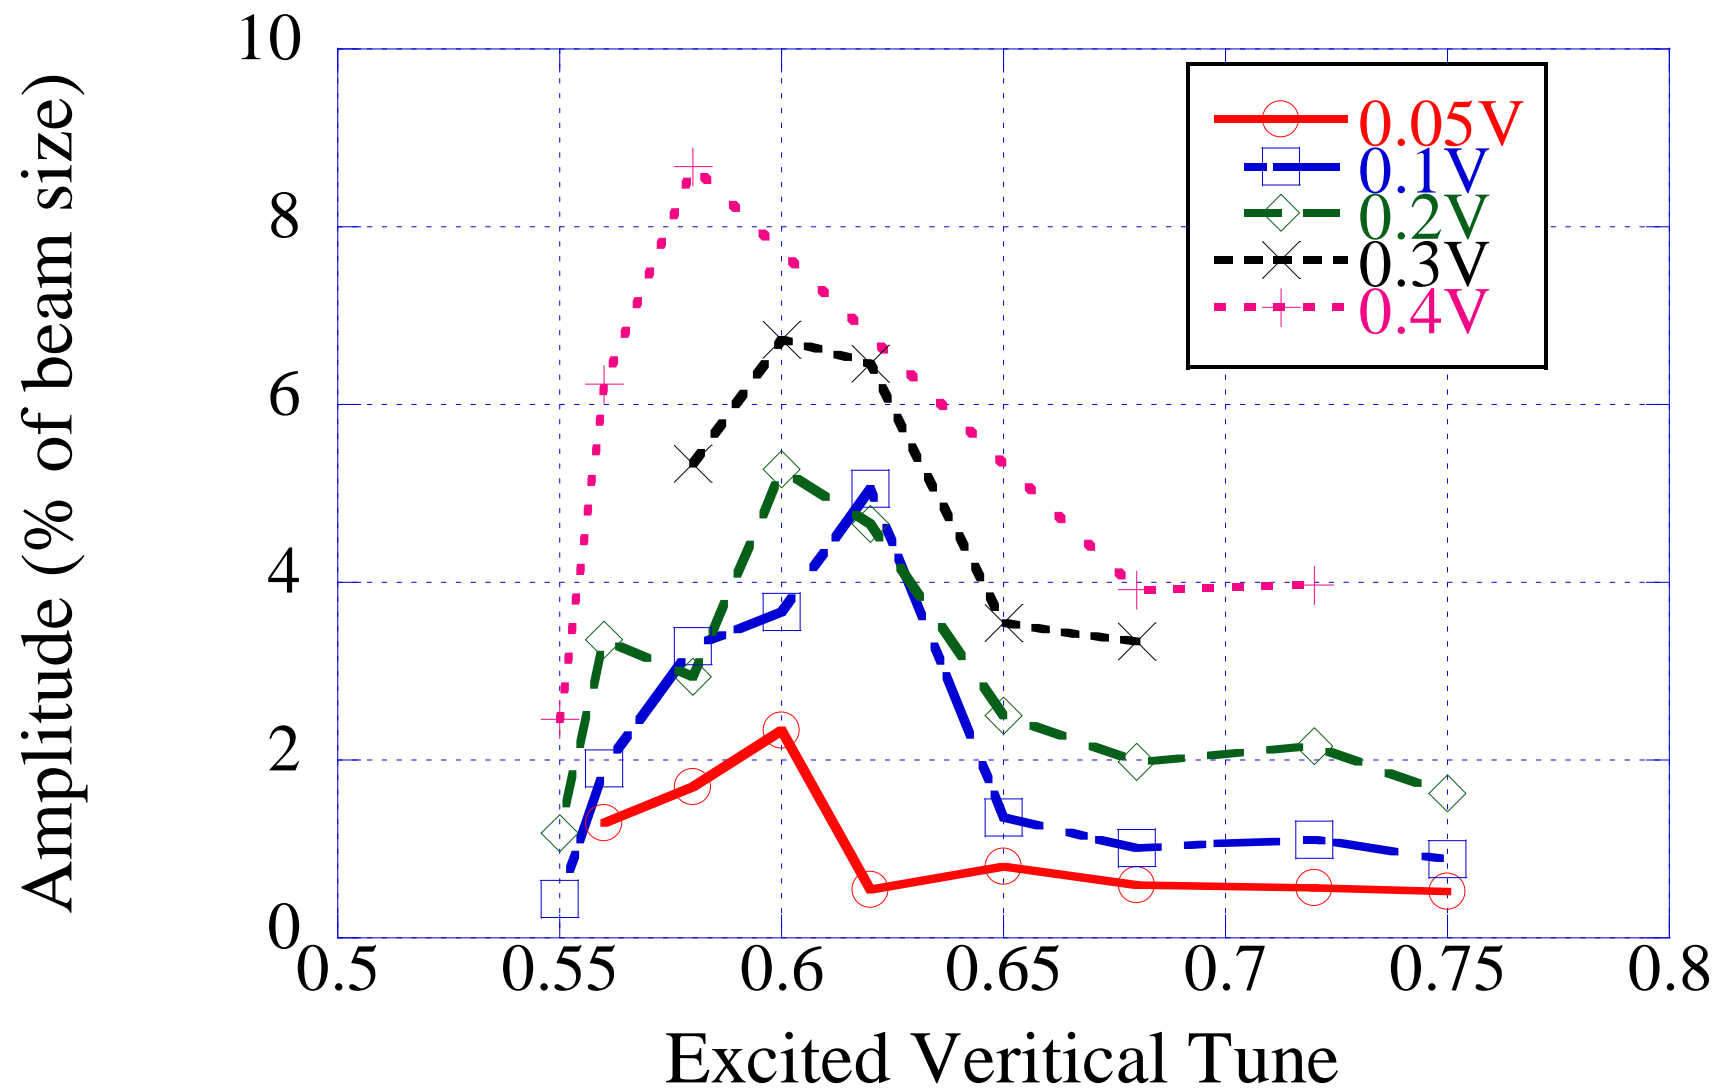


Luminosity drop

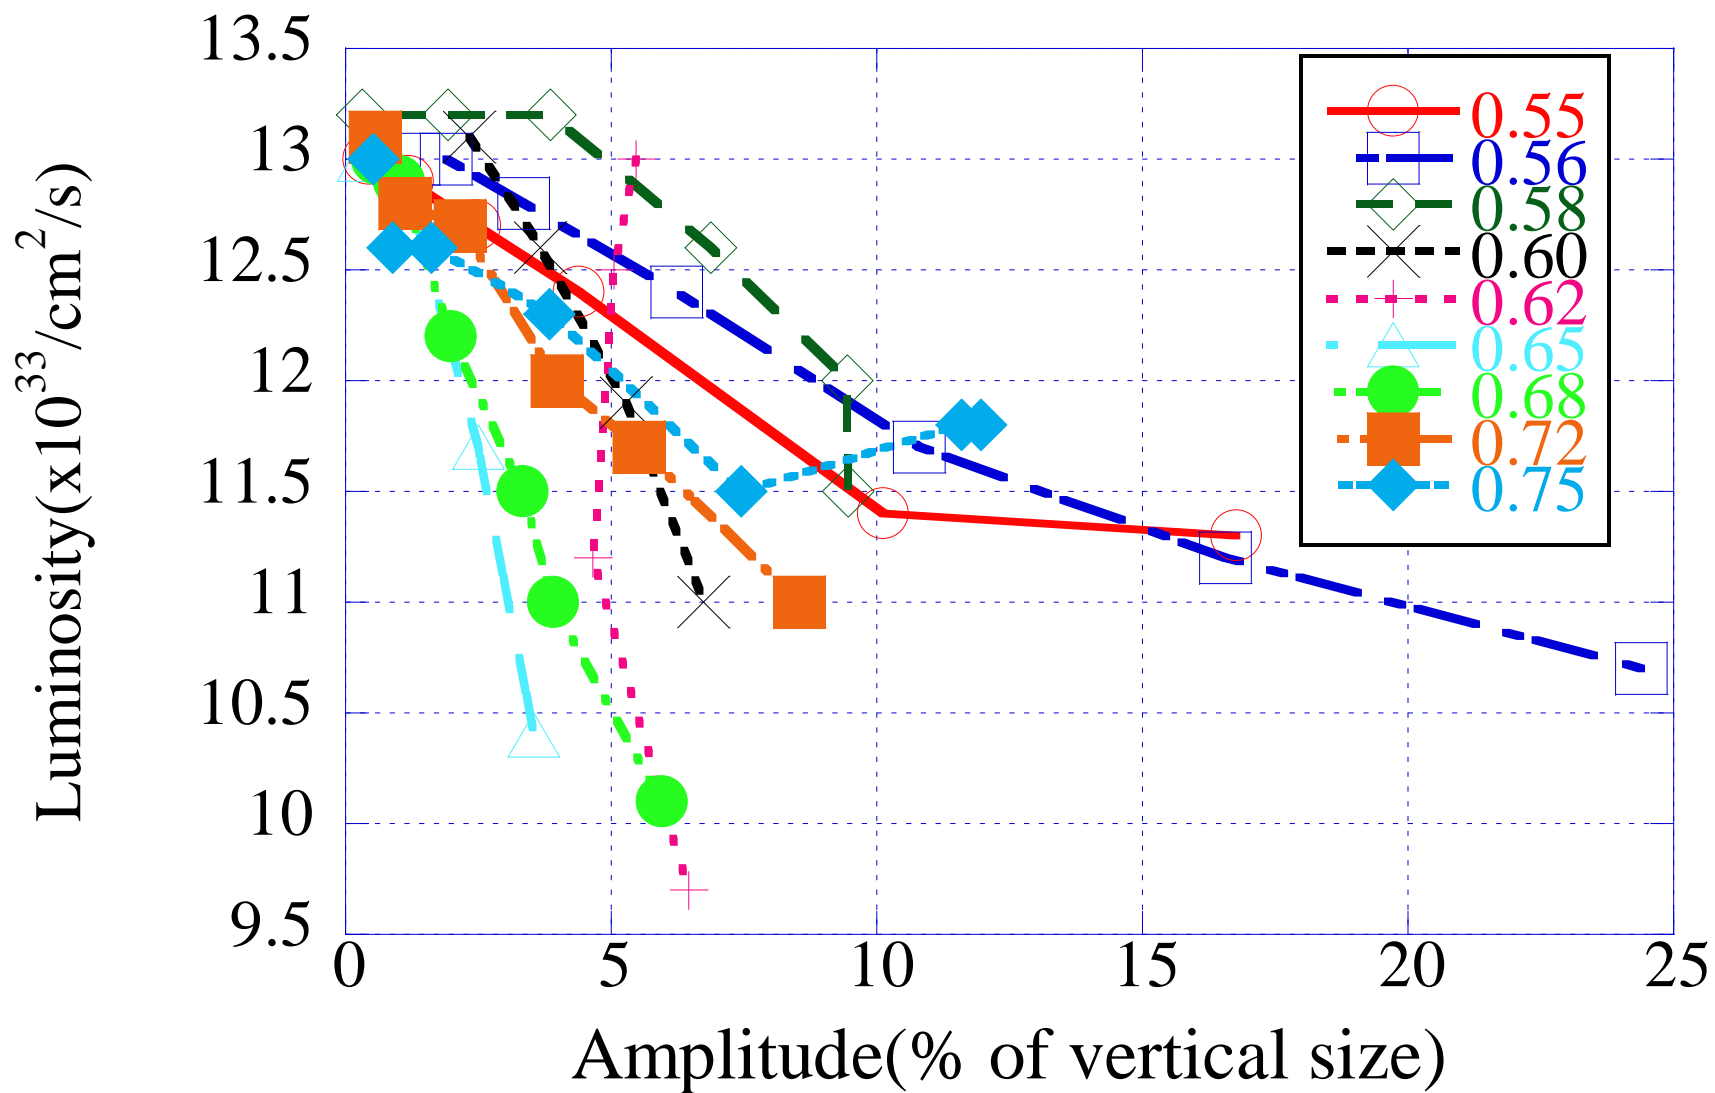

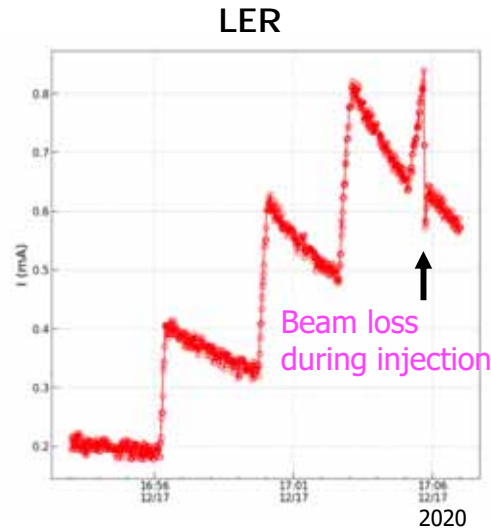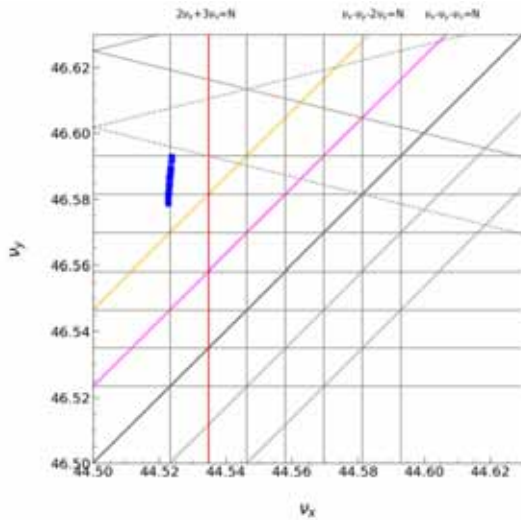


single bunch operation

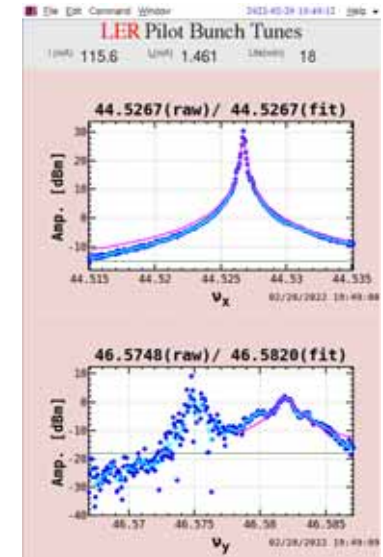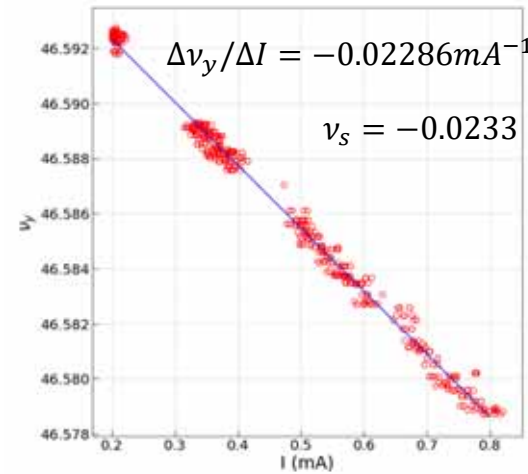

Tune measurement:
side band was observed
at high bunch current.



Simulation: PyHEADTAIL ($\Delta v_y/\Delta I \sim v_s/2$)

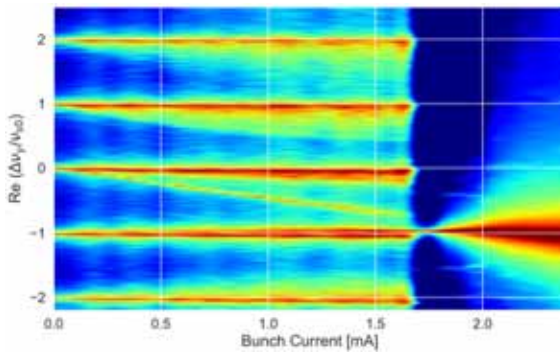

T. Ishibashi

We observed TMCI at SuperKEKB when we used a carbon head for one of the vertical collimators. The tune shift was similar to the synchrotron tune and the threshold was 0.85 mA/bunch. (2020)

We control the vertical collimator aperture to keep the tune shift less than half of v_s .
The TMCT threshold becomes 1.7 mA/bunch in the LER for the normal operation.

* We replaced the carbon head with tantalum after this experiment.

Tune shift is equivalent to impedance.




Larger circumference (larger T_0) makes larger tune shift.

$$\frac{\Delta\nu_y}{I_b} = -\frac{T_0}{4\pi(E/e)} \sum_i \beta_{yi} \kappa_i(d) \quad \rightarrow \frac{T_0}{4\pi(E/e)} = 0.2(\text{ps/kV}) \quad \text{for SuperKEKB}$$





Kick factors of vertical collimators are calculated by GdfidL (and ECHO3D).

The vertical collimators contribute approximately 70 % of the total impedance.





Vertical beam size blowup was observed at much smaller than the TMCI threshold.
"-1 mode instability" ← impedance and BxB FB tuning

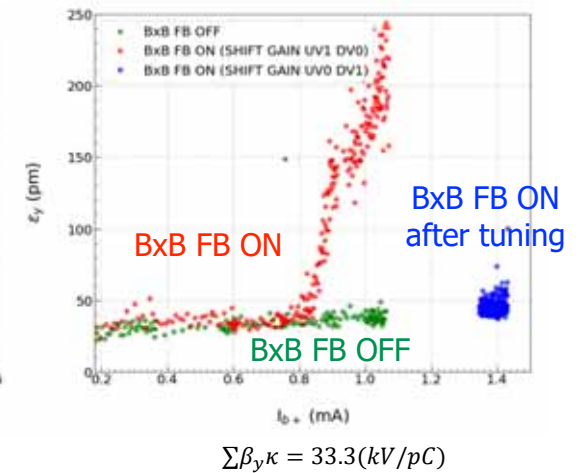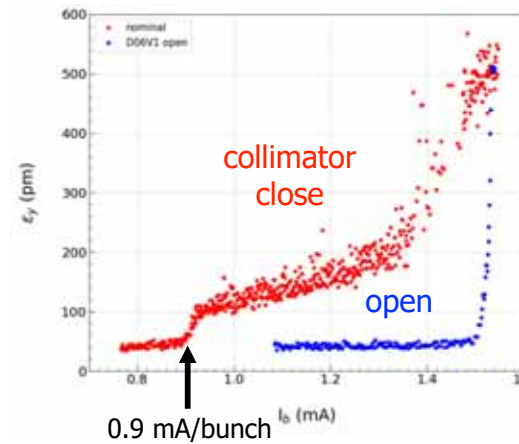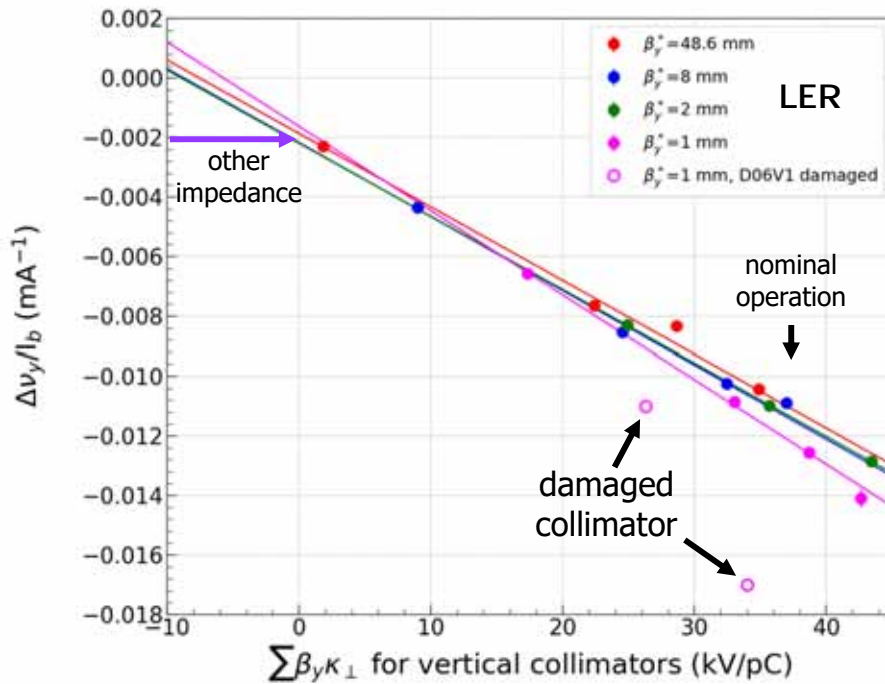


LER Transverse FIR filter

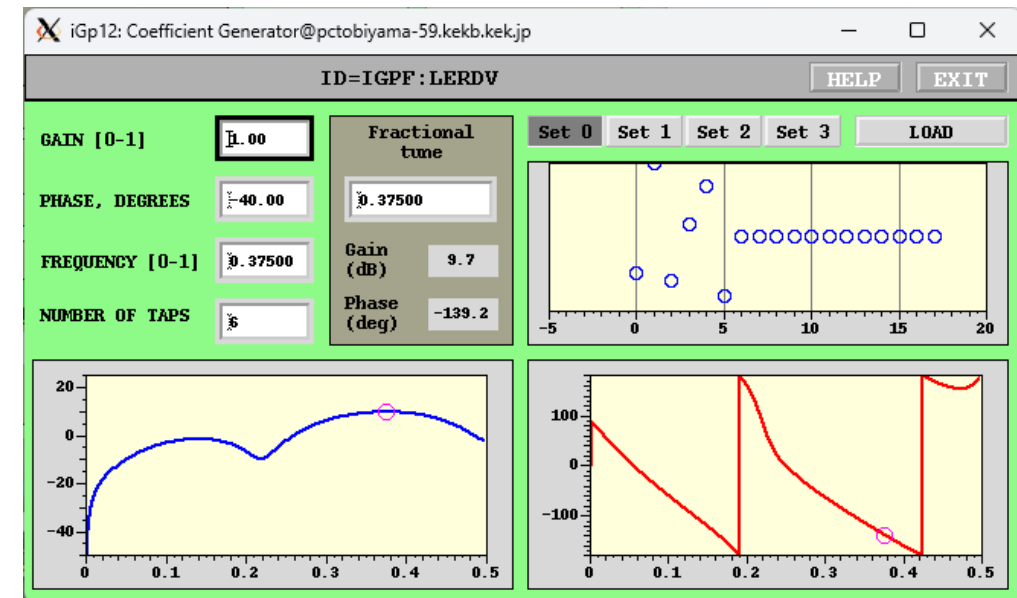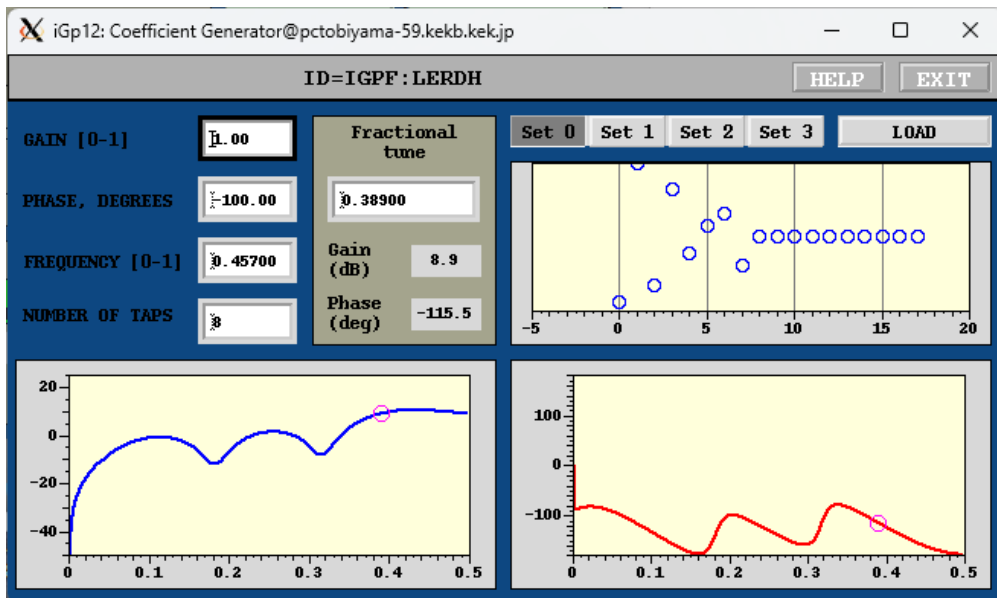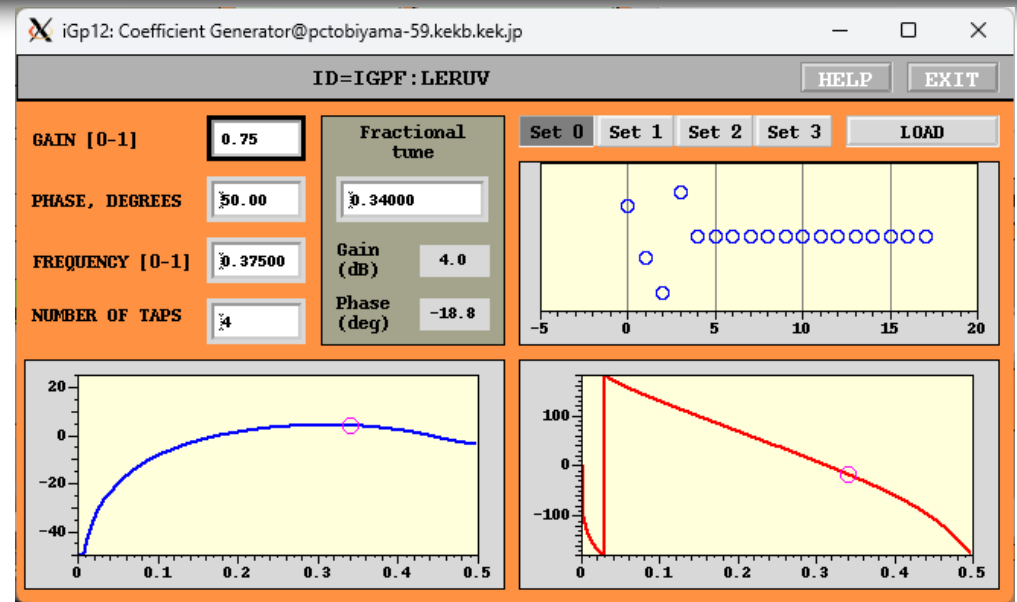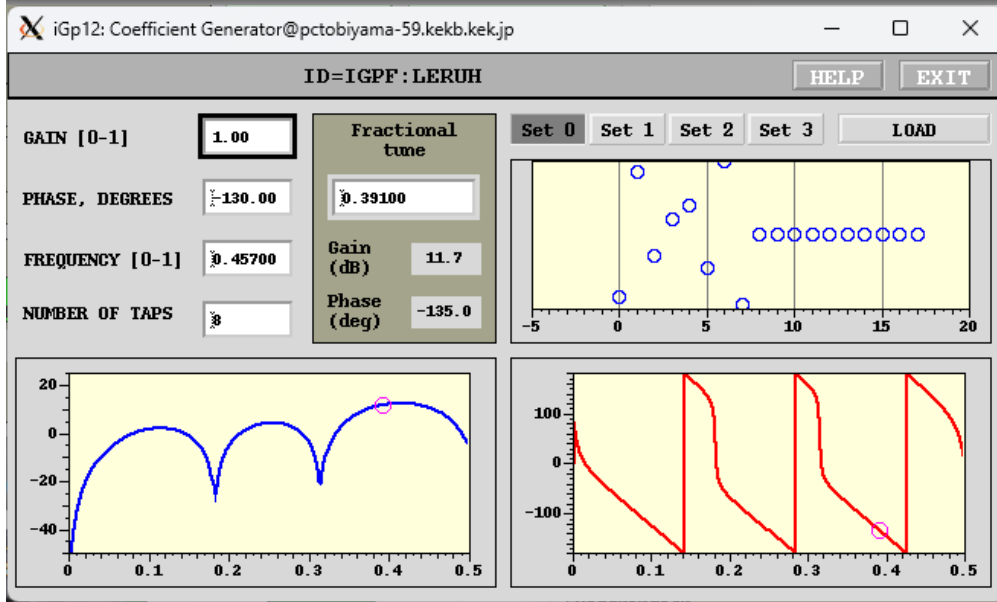



HER Transverse FIR filter

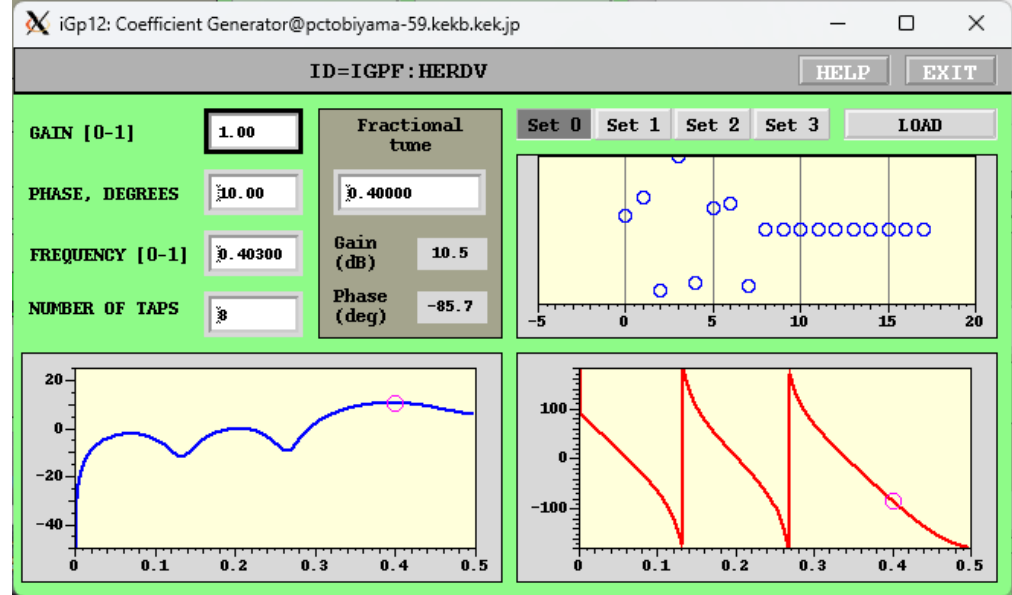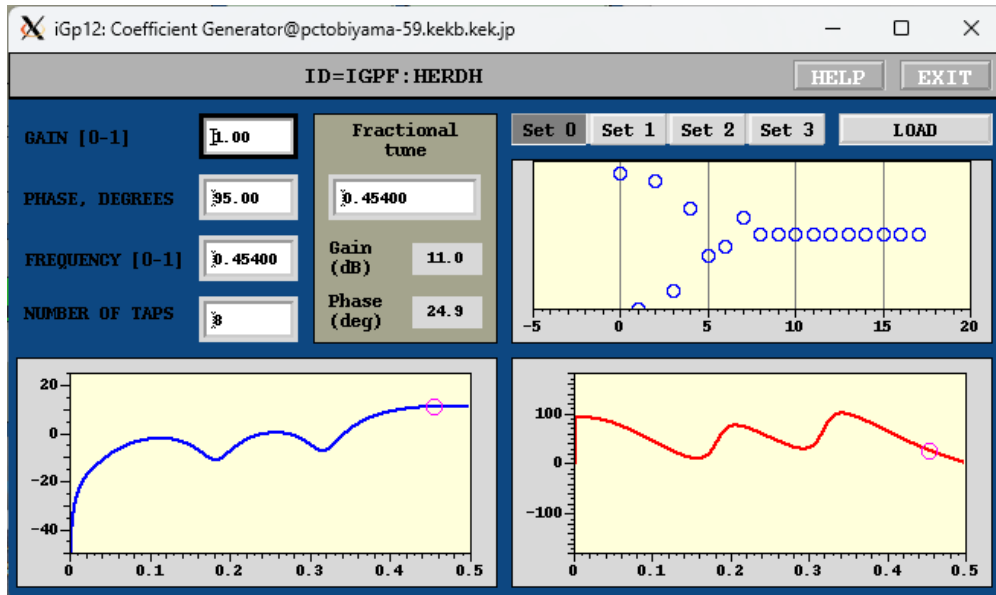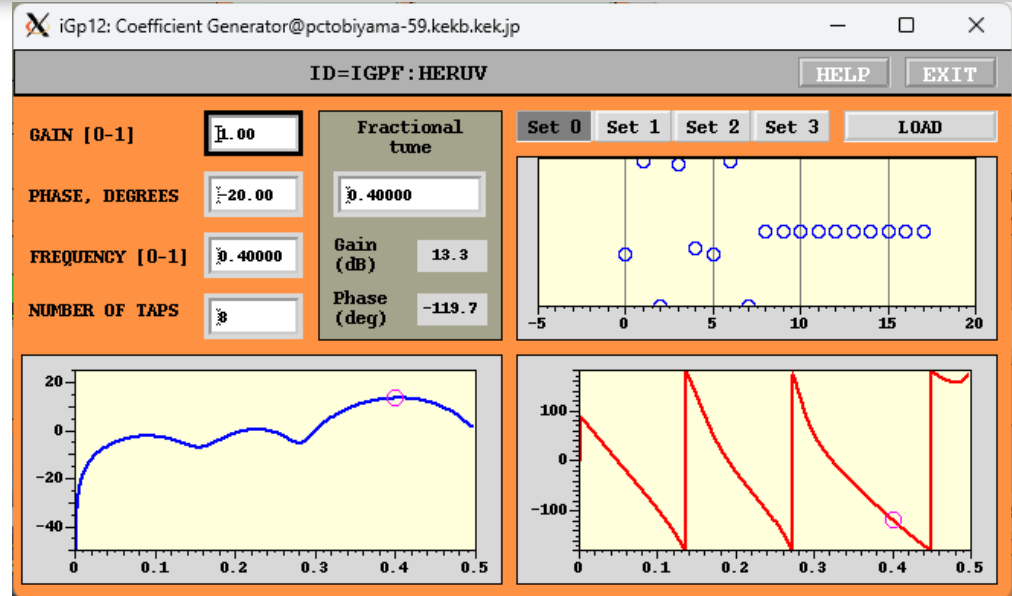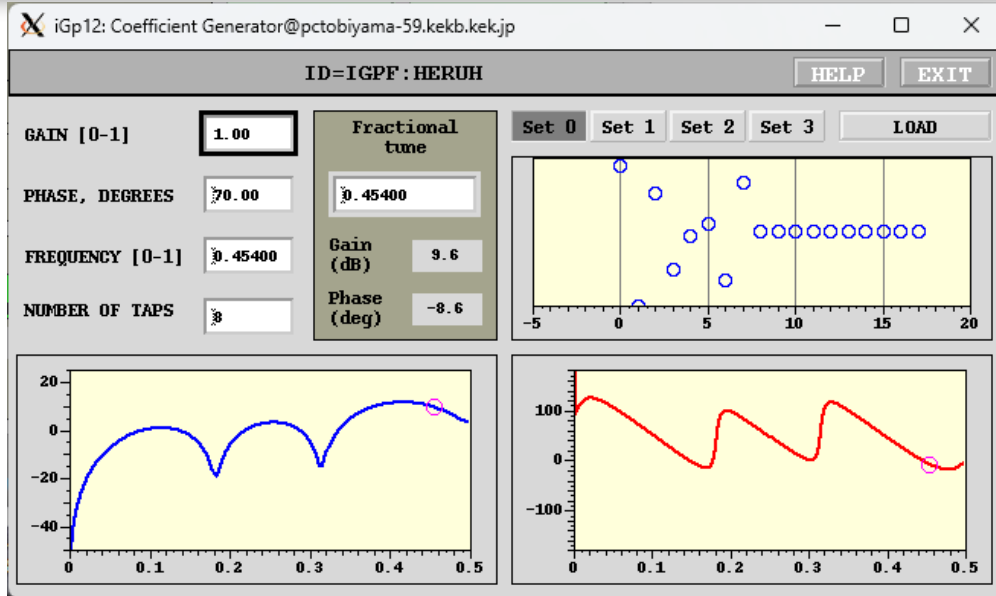


LER Longitudinal

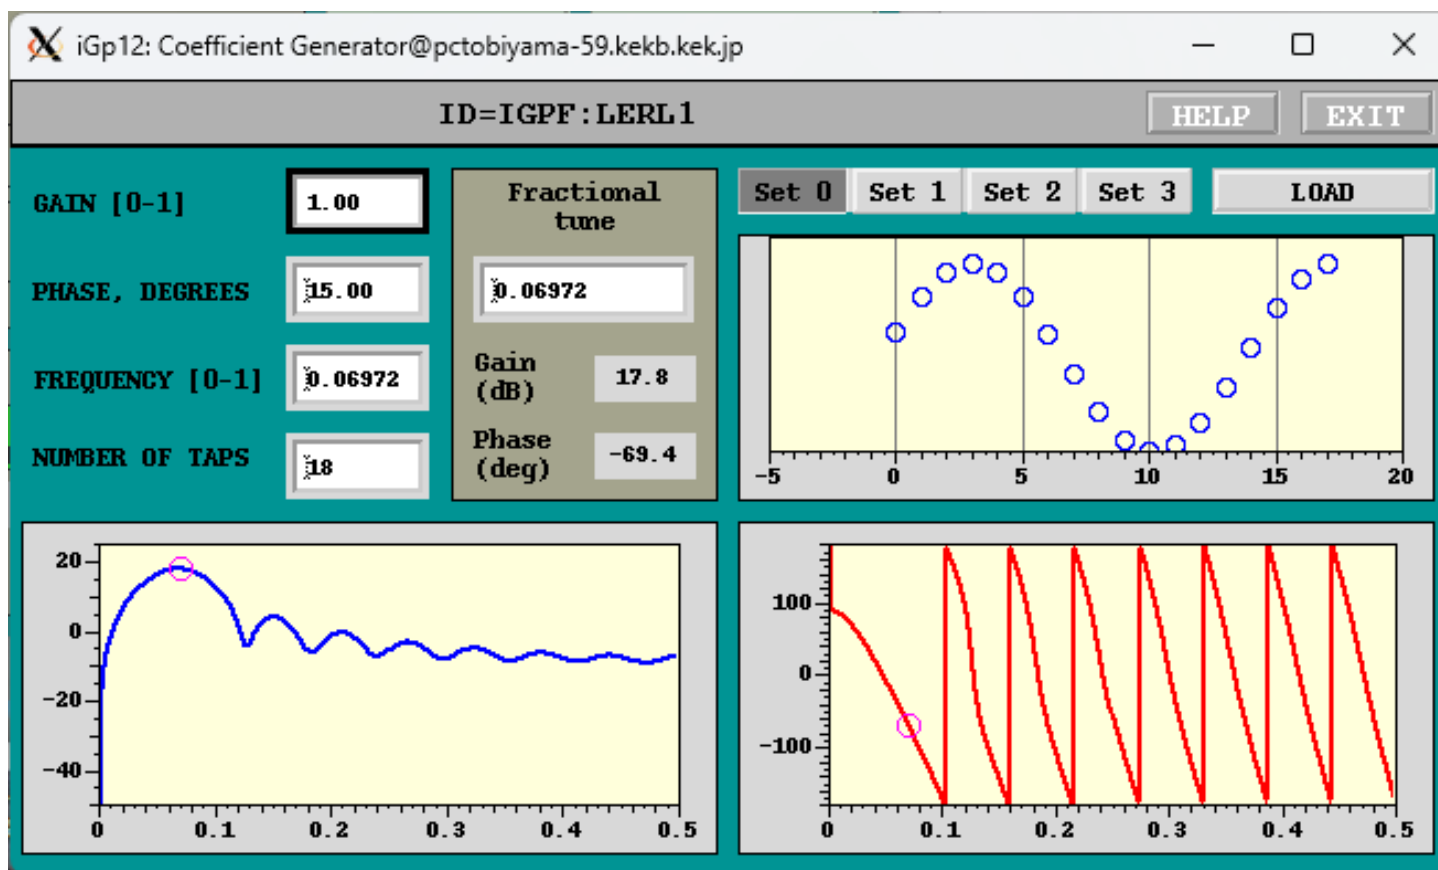

LER ECI Unstable mode

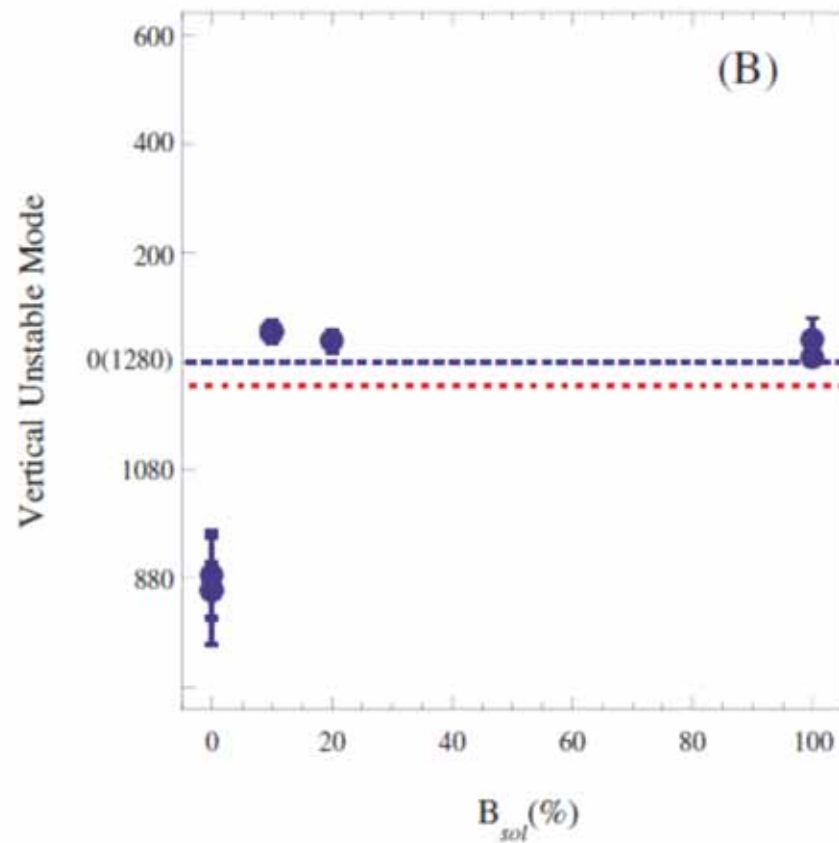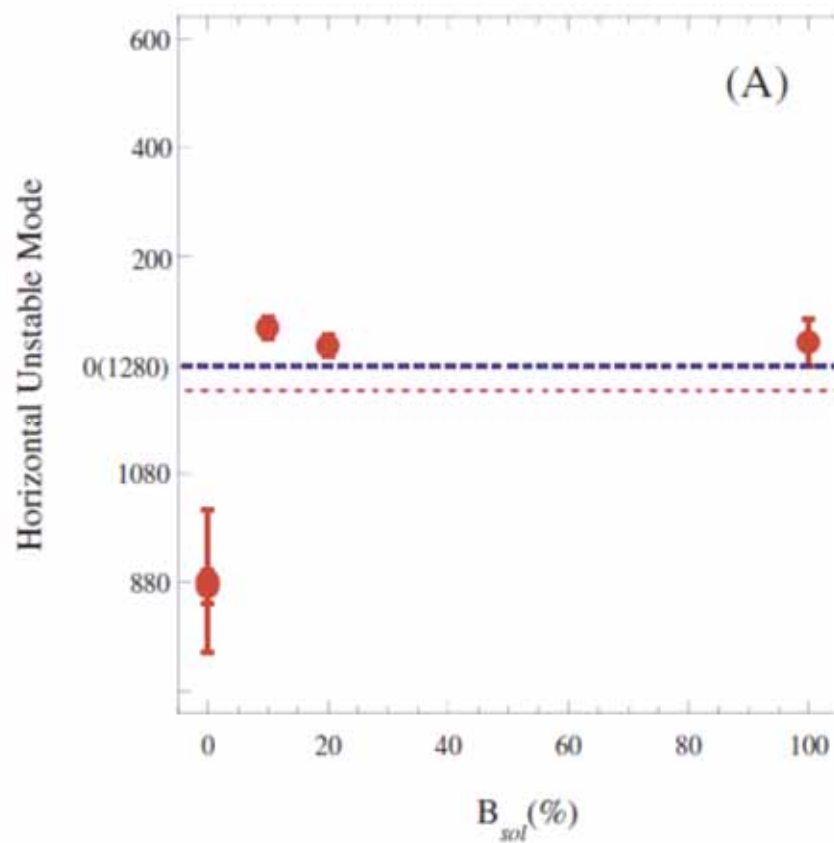

永久磁石設置前の例

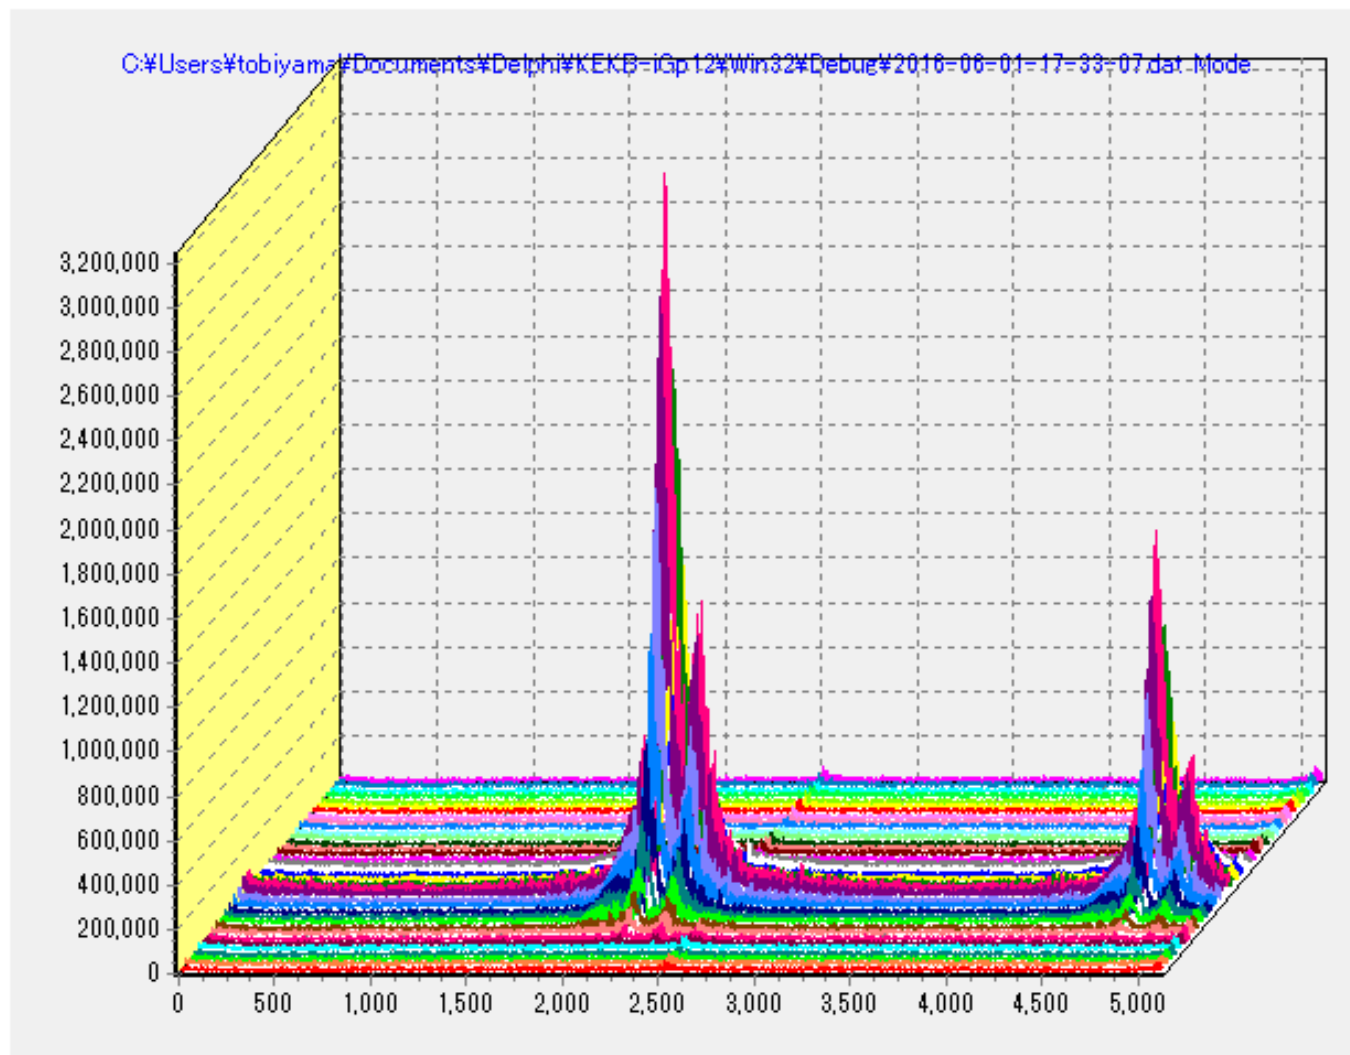

By 2, 300mA Vertical方向

