

Access Procedures: bwHPC Clusters + NHR@KIT

Michele Mesiti, SCC, KIT



Outline

- Registration Processes
 - **bwUniCluster 2.0**
 - HoreKa
 - bwForCluster
- Login Procedure
 - Virtual private network (VPN)
 - Two-factor authentication (2FA)
 - SSH - remote login client
 - Jupyter
- File Transfer & File storage
- FAQs

HPC Infrastructure in BaWü: Registration

■ bwUniCluster 2.0

- At tier (level) 3, Baden-Württemberg (BW) cluster for general purposes
- **Simple** registration process

■ HoreKa

- At tier 2, national research cluster
- Access process ensures that applications fulfill requirements of parallelization




■ bwForCluster (JUSTUS 2, Helix, NEMO, BinAC)

- Also at tier 3, BW research clusters
- Architecture optimized for certain scientific communities
- Access process ensures using the suitable cluster and enhances user support

Registration

Registration Process – bwUniCluster 2.0

- Access only for members of shareholder universities.
- More Details: <https://wiki.bwhpc.de/e/Registration/bwUniCluster>

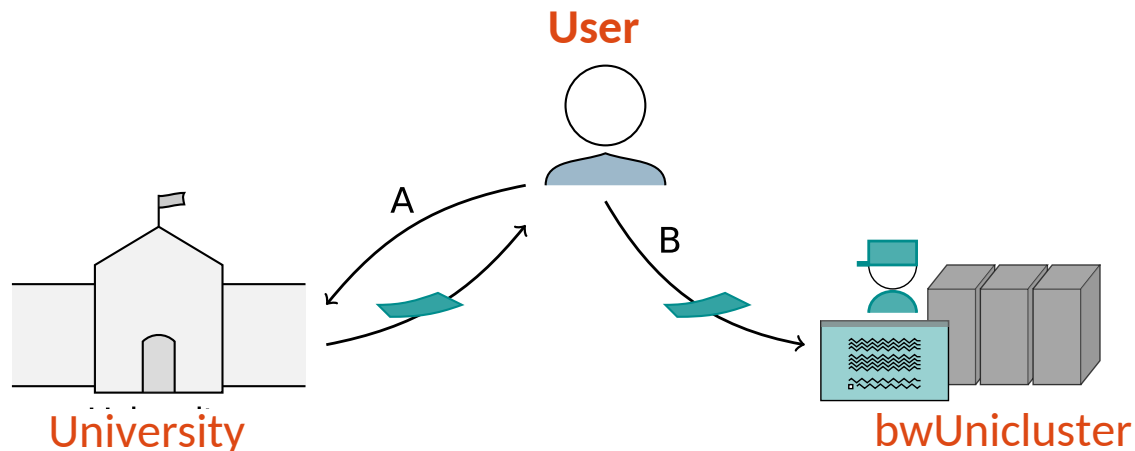


Step A: Obtainment of bwUniCluster entitlement

- Each university has its own entitlement granting policies!

Step B: Web registration at <https://login.bwidm.de> + questionnaire (https://zas.bwhpc.de/bwuni_questionnaire.php)

- Login via bwIDM with your university account, set service password and 2FA

Registration Process - bwForClusters (short version)

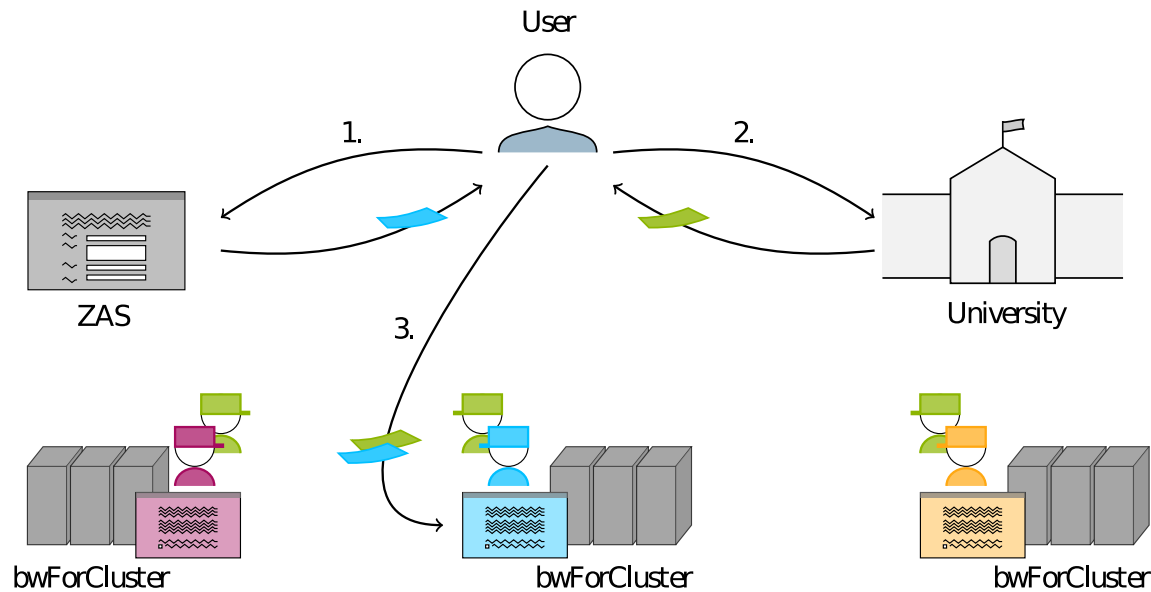

Step 1: Registration at „Central Application Site (ZAS)“

■ Approval  of Cluster Assignment Team (CAT)


Step 2: Get bwForCluster entitlement  by own university

Step 3: Web registration at designated bwForCluster site

e.g. <https://login.bwidm.de> , bwForCluster JUSTUS 2 (Computational Chemistry)


Central Application Site for bwHPC

zas.bwhpc.de

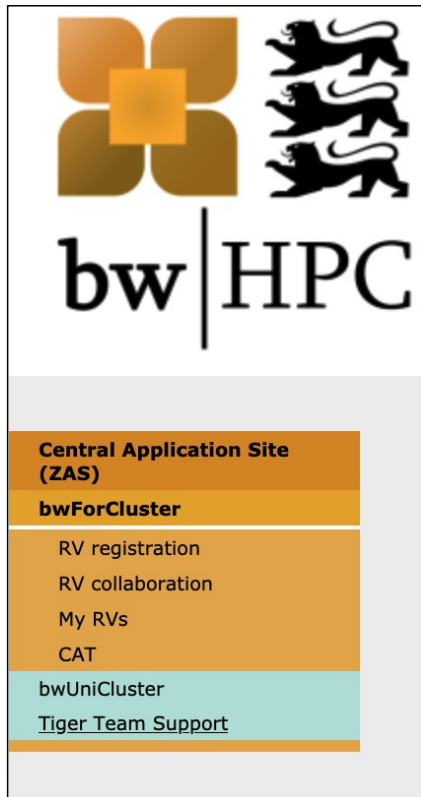


- Web interface of HPC clusters (in the state BW) to handle the user compute activities.
- Nomenclature:
 - RV = Planned compute activities (Rechenvorhaben).
 - RV Responsible: The person who does the registration of the RV (applicant)
 - Cluster Assignment Team: aka CAT; assigns to one fitting cluster according to the RV requirement.
 - RV collaboration = The team (managers and coworkers)
- An RV approval is valid
 - Only on one bwForcluster for a period of one year after the approval
 - For all team members


Registration Process: bwForCluster - Step 1a




RV registration

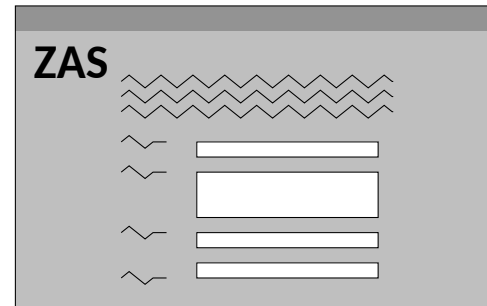


Registration Process: bwForClusters - Step 1b

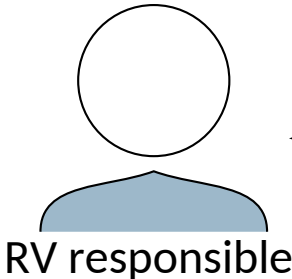

← acronym / password



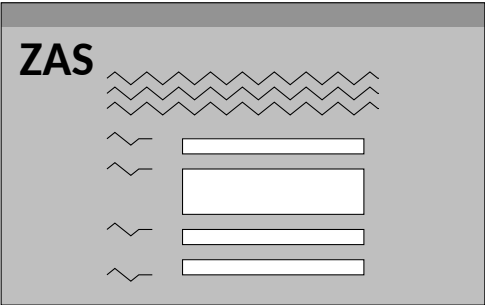


RV application

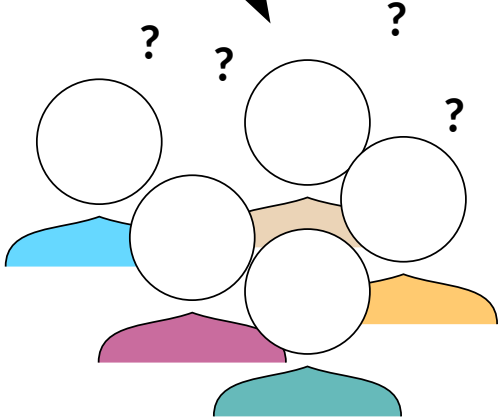


CAT (Cluster Assignment Team)


Registration Process: bwForClusters Step 1c

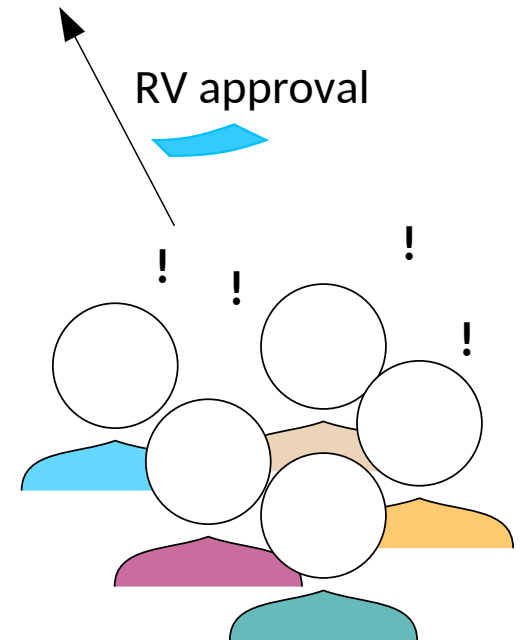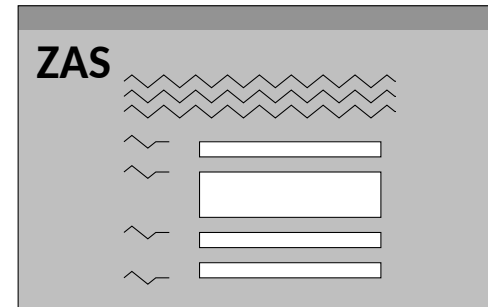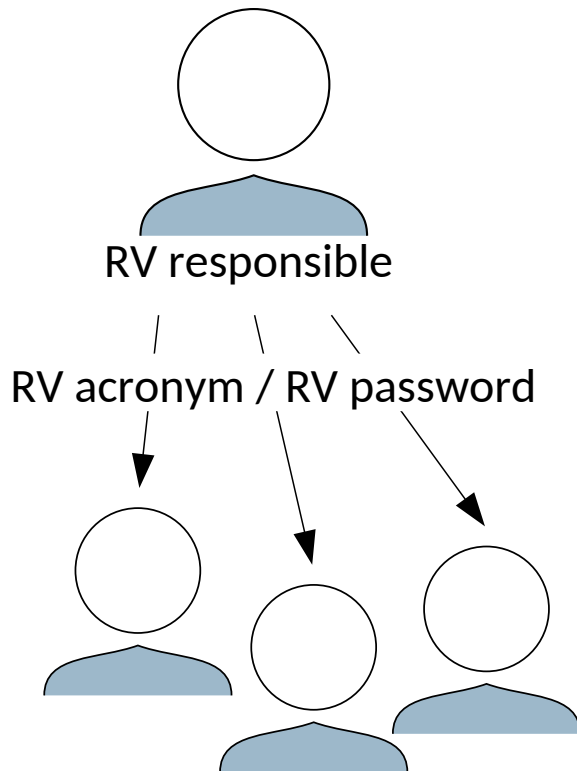

Registration Process: bwForClusters - Step 1d

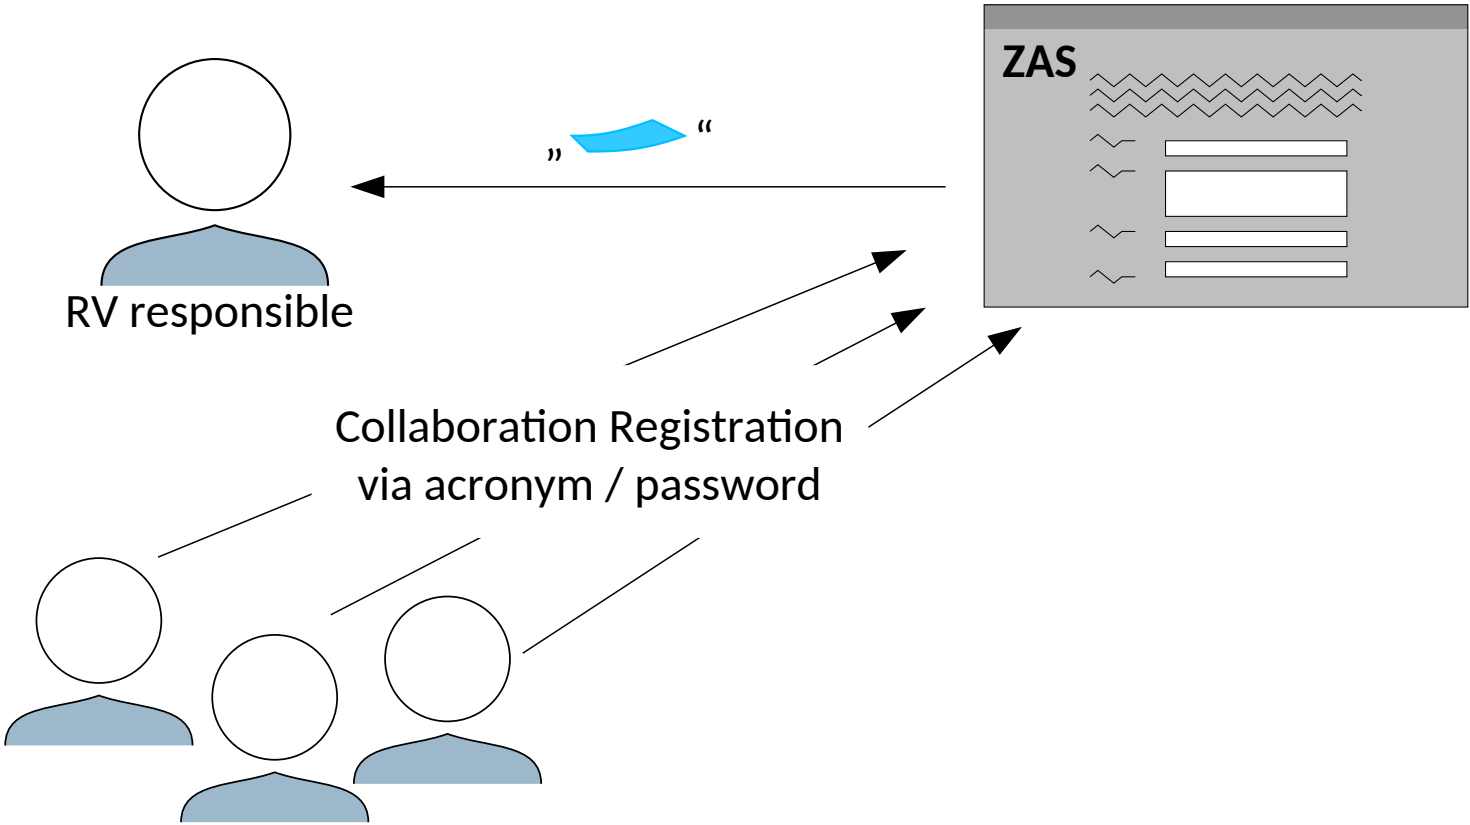


Registration Process: bwForClusters - Step 2 & 3

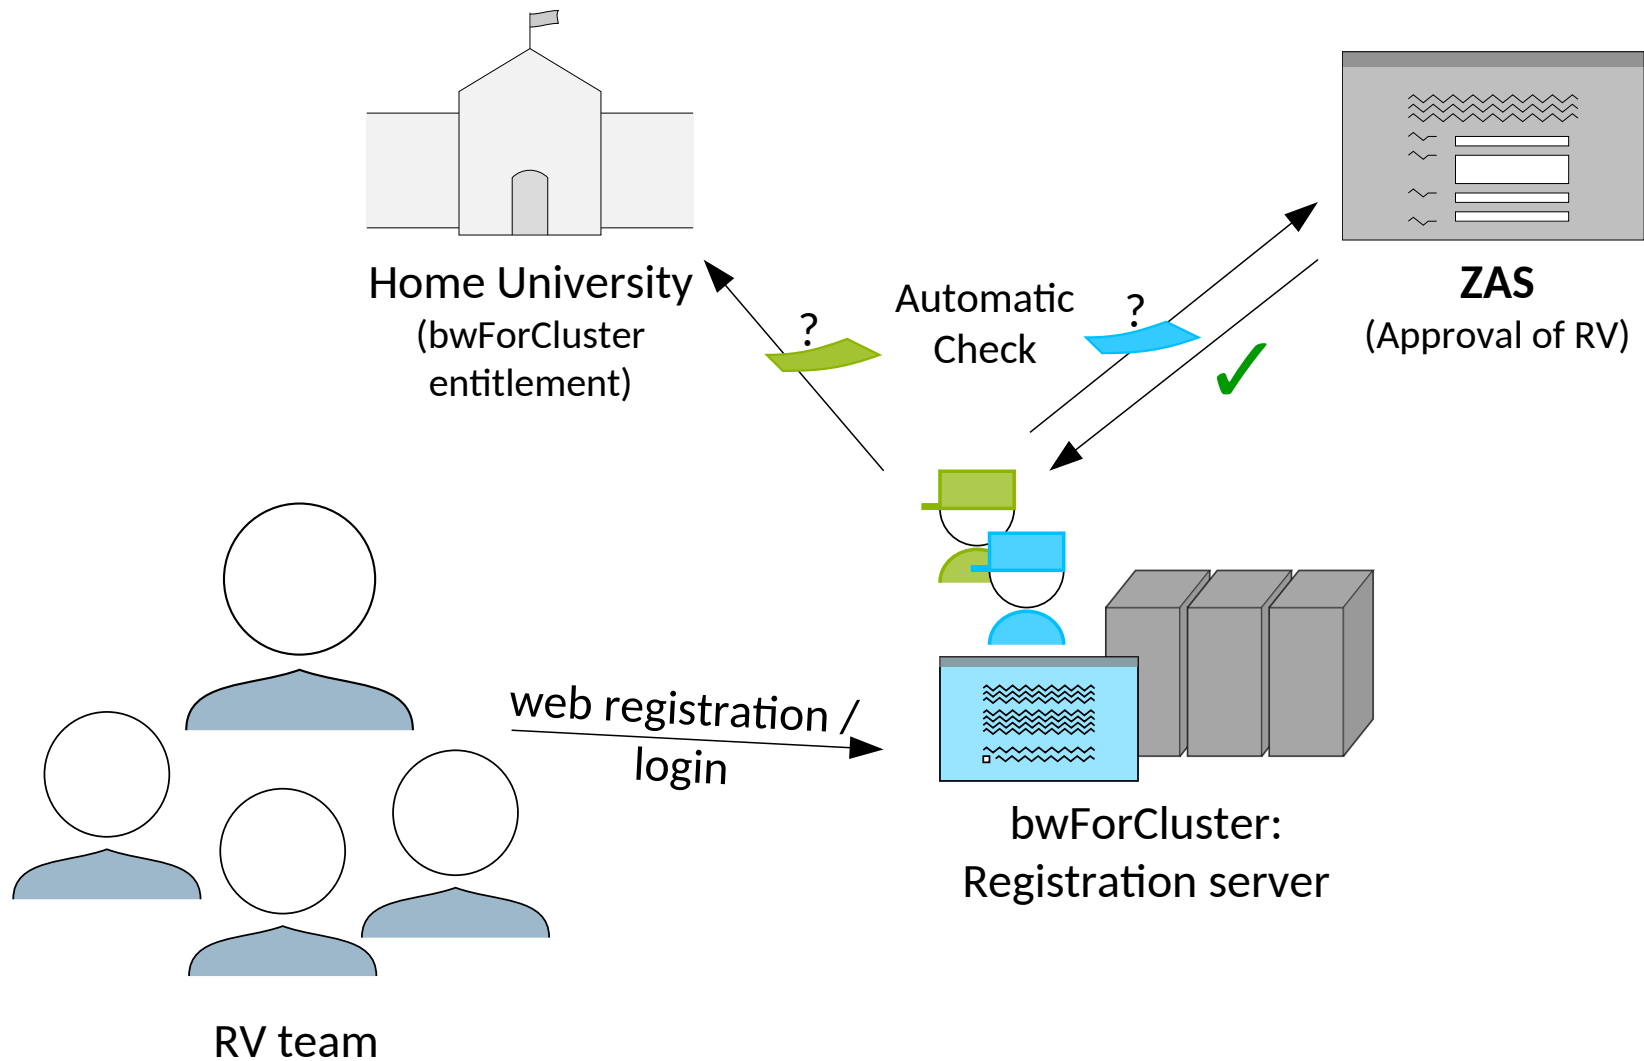

Registration Process – HoreKa

Registration:

1. [Online Proposal Form \(JARDS\)](#)
2. Proposal is peer reviewed
3. [HoreKa access form](#)
4. Register on web page
<https://fels.scc.kit.edu>

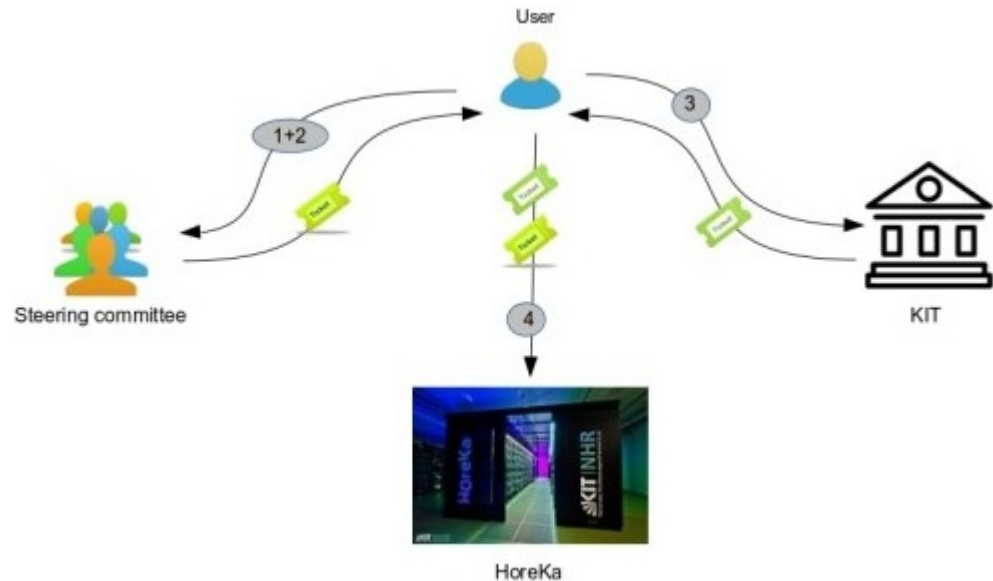

■ **IMPORTANT:** A status report must be provided annually (10-15 pages)!

■ More Info: <https://www.nhr.kit.edu/userdocs/horeka/projects/>

Registration Process (2) - HoreKa

Ad 1:

- Fill Online Proposal Form on web page <https://jards.nhr.kit.edu/jards/dev/WEB/>
- Normal project (2-15 mill CPUh / 0.03-0.2 mill GPUh (peer reviewed) or
- Large project (15-70 mill CPUh / 0.2-1 mill GPUh (peer reviewed)
- Test project with unmodifiable 500000 CPUh / 5000 GPUh (review process by SCC)

Ad 2:


- Write an extended project description of min. 3 pages (N/L project) or
- an extended project description of min. 1 page (Test project)

Ad 3:

- Fill a [HoreKa access form](#) for each coworker (except for project manager)

Ad 4:

- Register on web page <https://fels.scc.kit.edu> for HoreKa and set a service password
- Login on HoreKa with OTP (2FA) and service password

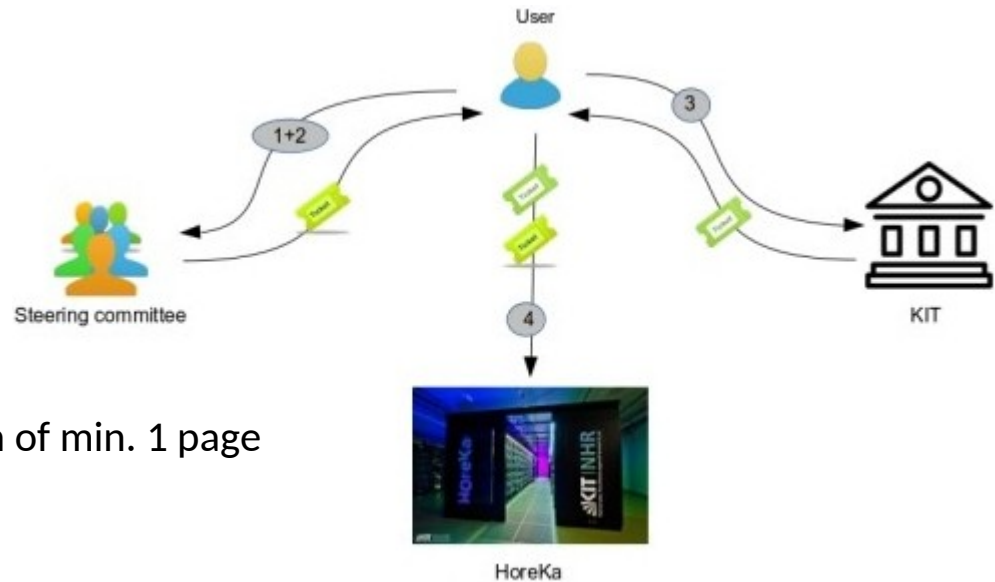

“Exercise”: Register and set password

<https://fels.scc.kit.edu>


<https://login.bwidm.de>

<https://wiki.bwhpc.de/e/Registration/bwForCluster/Service>

First Steps - 2FA

Two-Factor Authentication - 2FA (1)

- Besides your password you need a second factor,
→ the **Time-dependent One-Time Password** (TOTP),
in order to log into any HPC system
- TOTPs can be generated by **Token**
 - an app on your smartphone or tablet, e.g.
 - FreeOTP for **Android** or **iOS**
 - Google Authenticator for **Android** or **iOS**
 - an app running on an additional PC / notebook, e.g.
 - Authy for **Mac**, **Windows** or **Linux**
 - a hardware token, e.g.
 - Yubikey

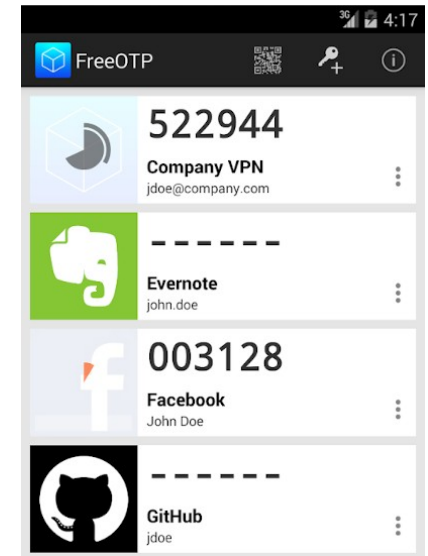

IMPORTANT: the device that generates the One-Time Passwords and the device for the cluster login **must not** be same!

2FA: Registration of your token (1)

■ Before usage:

■ Token has to be synchronized/registered with a central server



■ 1. Login to

- <https://login.bwidm.de> (BWUC2)

- <https://fels.scc.kit.edu> (HoreKa)

Go to „My Tokens“


■ 2. Click on „New smartphone token“

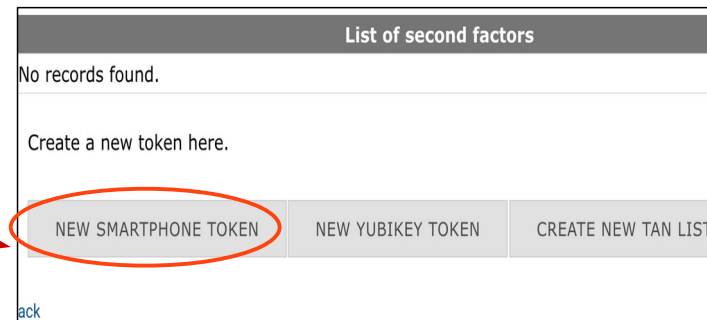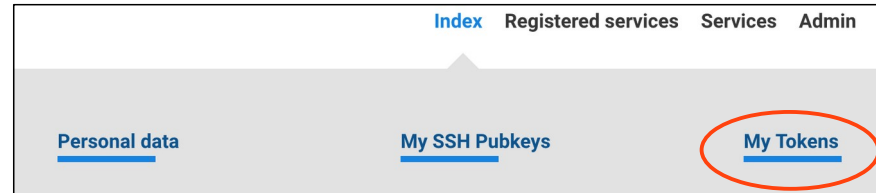

3. A new windows opens.

Click on „Start“ to generate a new QR code.

This may take a while.


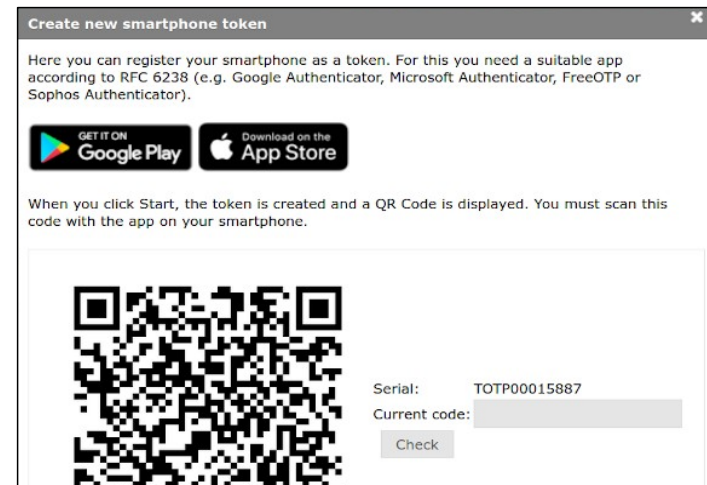


2FA: Registration of your token (2)


4. Scan QR code with your token app

- Once done, it generate an endless stream of (six-digit) values that can be used as a second value besides the normal account password.

5. Check your token, use „Check“, and compare list of active tokens under <https://login.bwidm.de> (bwUC2) / <https://fels.scc.kit.edu> (HoreKa)

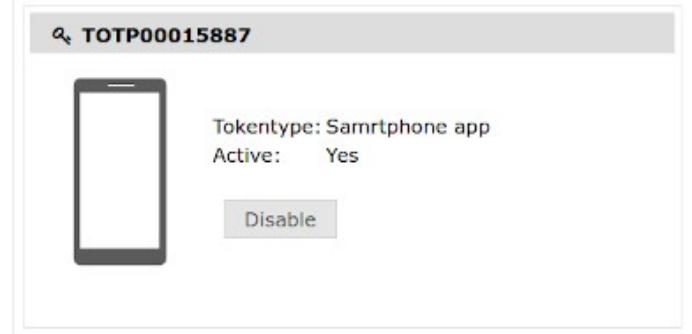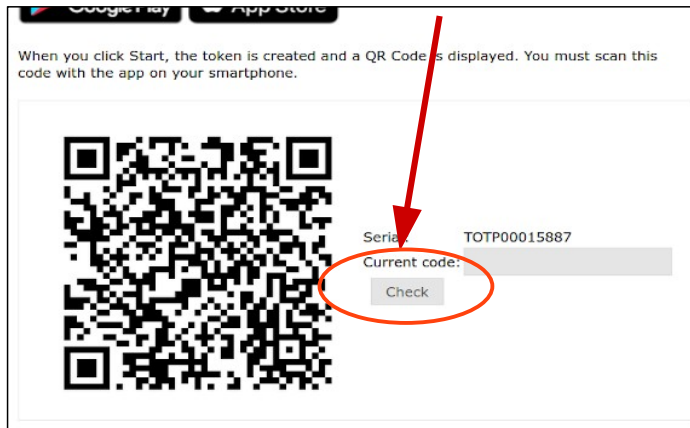

6. Please register at least a Backup TAN list in addition to the hardware/software token if you only register a single token!

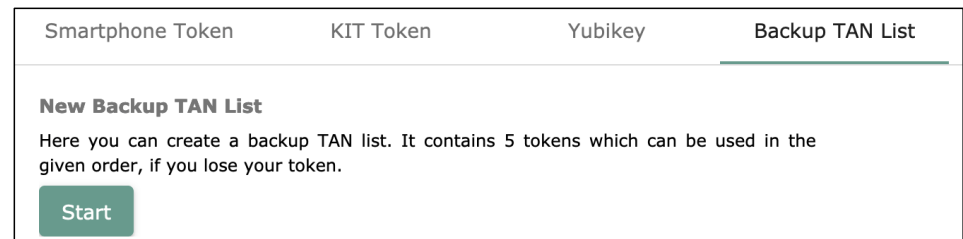

Login

Login Procedure - HoreKa

Virtual Private Network

- Cluster access is limited to IP addresses from the so-called BelWü networks
 - If outside: connect first via VPN to your home organisation

MS Windows

- GUI: MobaXterm, PuTTY
- Connection via **SSH**


UserID: *prefix_username*

Host, e.g. HoreKa:

hk.scc.kit.edu

or

horeka.scc.kit.edu

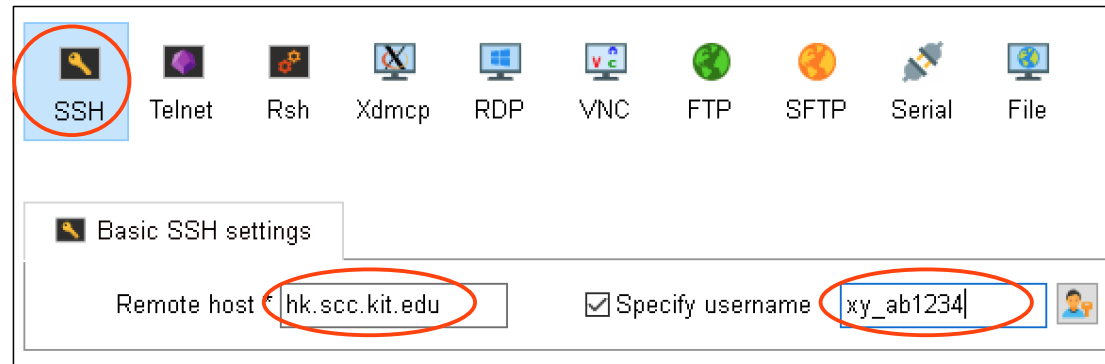

Linux / macOS

- Command line interface (CLI): use terminal etc.

```
$ ssh -X xy_ab1234@hk.scc.kit.edu
```

Login Procedure – bwUniCluster 2.0

Virtual Private Network

- Cluster access is limited to IP addresses from the so-called BelWü networks
 - If outside: connect first via VPN to your home organisation

MS Windows

- GUI: MobaXterm, PuTTY
- New Session

Connection via **SSH**


UserID: *prefix_username*

Host, e.g. bwUniCluster:

uc2.scc.kit.edu

or

bwunicluster.scc.kit.edu

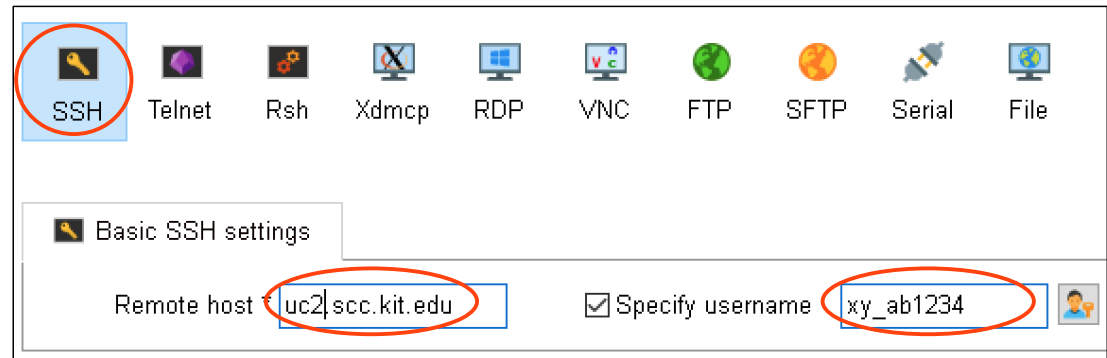

Linux / macOS

- ```
$ ssh -X xy_ab1234@uc2.scc.kit.edu
```

 etc.

# Login Procedure – **bwUniCluster 2.0** and **HoreKa**

## Virtual Private Network

- Cluster access is limited to IP addresses from the so-called BelWü networks
  - If outside: connect first via VPN to your home organisation

## MS Windows

- **GUI:** MobaXterm, PuTTY
- Connection via **SSH**  
UserID: *prefix\_username*  
Host, e.g. **bwUniCluster**:  
**uc2.scc.kit.edu**  
or  
**bwunicluster.scc.kit.edu**

## Linux / macOS

- Command line interface (CLI):  

```
$ ssh -X xy_ab1234@uc2.scc.kit.edu
```

## MS Windows

- **GUI:** MobaXterm, PuTTY
- Connection via **SSH**  
UserID: *prefix\_username*  
Host, e.g. **HoreKa**:  
**hk.scc.kit.edu**  
or  
**horeka.scc.kit.edu**


## Linux / macOS

- Command line interface (CLI):  




```
$ ssh -X xy_ab1234@hk.scc.kit.edu
```

# Login: GUI – MS Windows - HoreKa

## Preference: MobaXterm

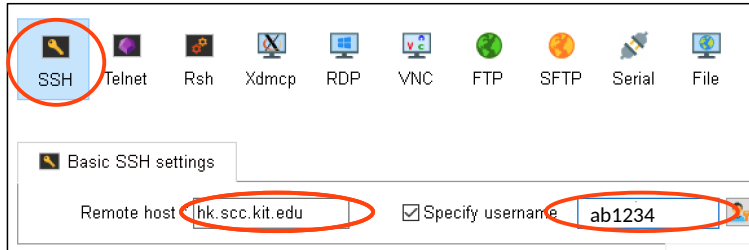




- Under „User Sessions“ double click on:
  - hk.scc.kit.edu (ab1234)
- Type in your OTP + Password
- Do not save password

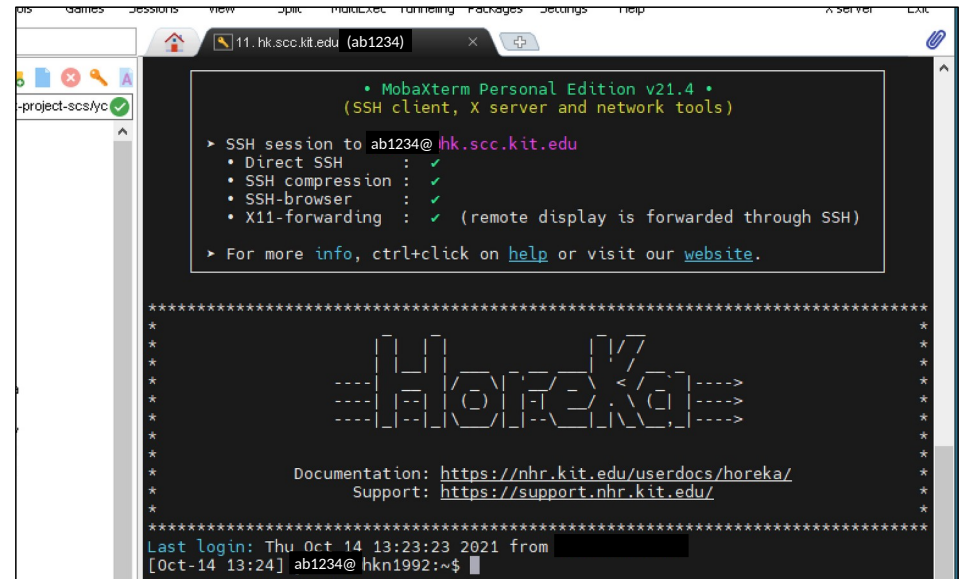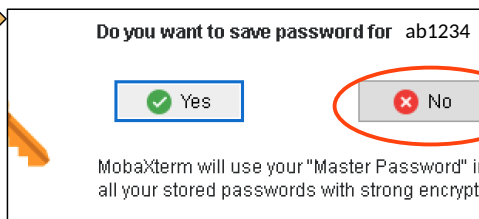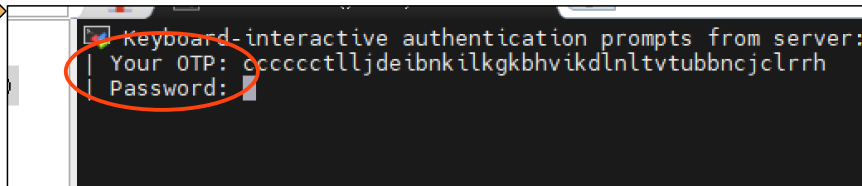



# Login: GUI – MS Windows – bwUniCluster 2.0

## Preference: MobaXterm

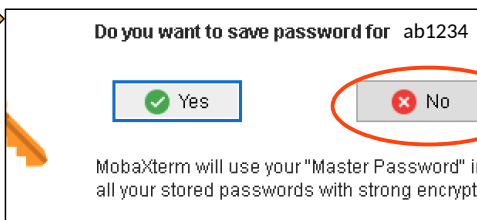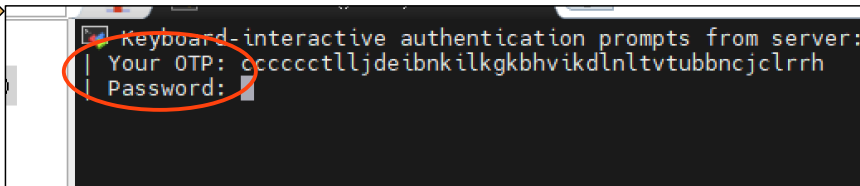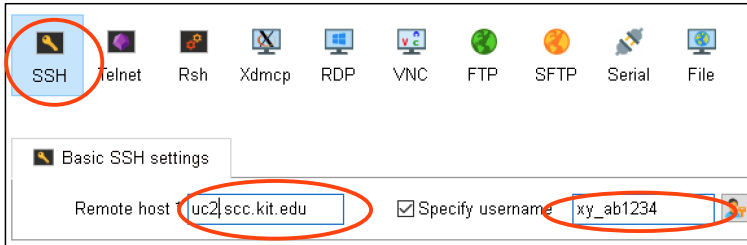

- Under „User Sessions“ double click on:
  - uc2.scc.kit.edu (ab1234)
- Type in your OTP + Password
- Do not save password



# X11 Tunneling

- Run programs at the cluster, display the GUI at home.
- Linux / macOS

```
$ ssh -X xy_ab1234@hk.scc.kit.edu
```

enables X11 forwarding

```
$ ssh -Y xy_ab1234@hk.scc.kit.edu
```


enables trusted X11 forwarding

```
$ ssh -X -C xy_ab1234@hk.scc.kit.edu
```

adds compression to improve slow connections

- MS Windows

- MobaXterm automatically starts X server

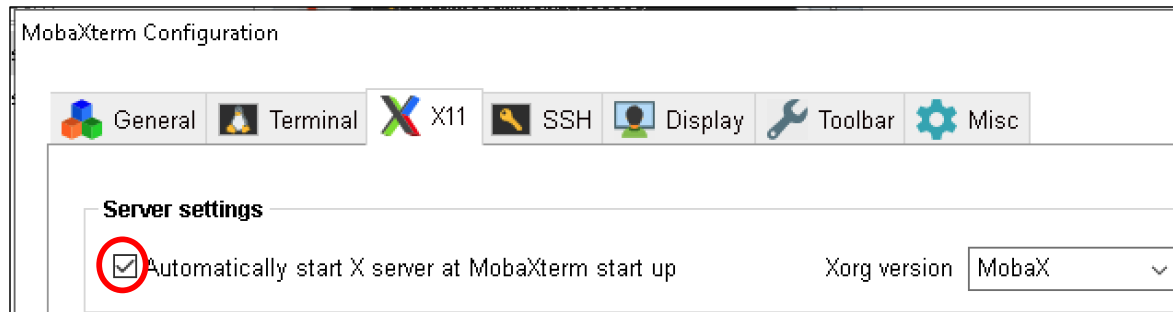


- BUT: For interacting with graphical applications on the Cluster better use:  
→ [Remote visualization](#)

# Jupyter

# Jupyter

## Interactive computing, teaching, prototyping

- HPC access with web browser
- Jupyter notebook
  - Executable code cells + any HTML element (text, images, videos, ...)
- JupyterLab
  - Interactive development environment
  - Handling of multiple notebooks
- JupyterHub
  - Management of compute resources

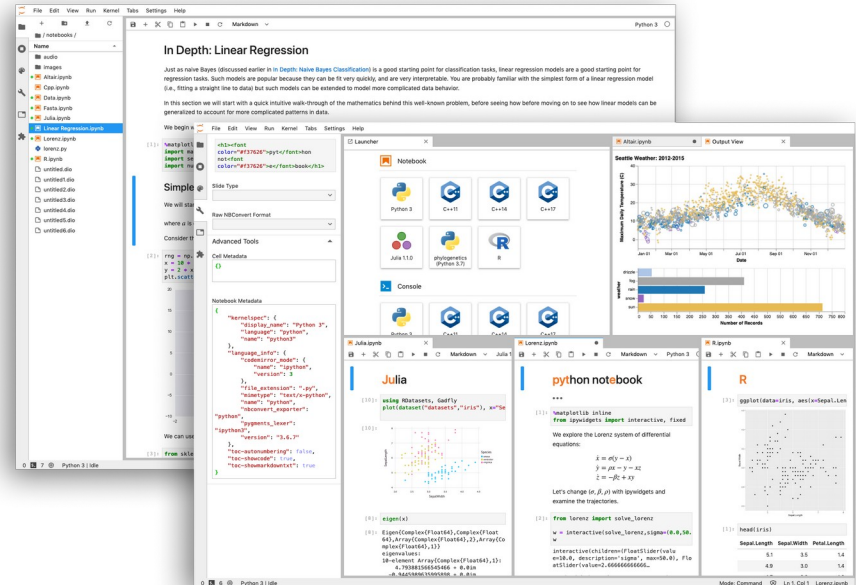

<https://jupyter.org/>

# Jupyter

## Accessing JupyterLab @ KIT

- Accessible from within network of your home organization (VPN from home)
- Landing page
  - <https://uc2-jupyter.scc.kit.edu>
  - <https://hk-jupyter.scc.kit.edu>
  - <https://haicore-jupyter.scc.kit.edu>
- Login
  - Credentials of home organization
  - Second factor: TOTP
- Documentation
  - [https://wiki.bwhpc.de/e/Jupyter\\_at\\_SCC](https://wiki.bwhpc.de/e/Jupyter_at_SCC)
  - <https://www.nhr.kit.edu/userdocs/jupyter/>

# File transfer

# File transfer - Linux

- **scp** = OpenSSH secure file copy

```
Push: $ scp [options] SRC [USER@]HOST:DEST
Pull: $ scp [options] [USER@]HOST:SRC [DEST]
```

- **rsync** = fast file-copying tool

- superior to scp, sending only the differences between the source files and the existing files in the destination

```
Push: $ rsync [options] SRC [USER@]HOST:DEST
Pull: $ rsync [options] [USER@]HOST:SRC [DEST]
```

- Example: Transfer a single file from your laptop to your [HoreKa](#) \$HOME directory

```
$ echo 'Test file transfer' > transfer.txt
$ scp transfer.txt xy_ab1234@hk.scc.kit.edu:~
(xy_ab1234@hk.scc.kit.edu) Your OTP:
(xy_ab1234@hk.scc.kit.edu) Password:
transfer.txt 100% 19 0.7KB/s 00:00
```

# File transfer - Linux

- **scp** = OpenSSH secure file copy

```
Push: $ scp [options] SRC [USER@]HOST:DEST
Pull: $ scp [options] [USER@]HOST:SRC [DEST]
```

- **rsync** = fast file-copying tool

- superior to scp, sending only the differences between the source files and the existing files in the destination

```
Push: $ rsync [options] SRC [USER@]HOST:DEST
Pull: $ rsync [options] [USER@]HOST:SRC [DEST]
```


- Example: Transfer a single file from your laptop to your **bwUC2** \$HOME directory

```
$ echo 'Test file transfer' > transfer.txt
$ scp transfer.txt xy_ab1234@uc2.scc.kit.edu:~
(xy_ab1234@uc2.scc.kit.edu) Your OTP:
(xy_ab1234@uc2.scc.kit.edu) Password:
transfer.txt 100% 19 0.7KB/s 00:00
```




# File transfer - MS Windows

## MobaXterm + MS File Explorer

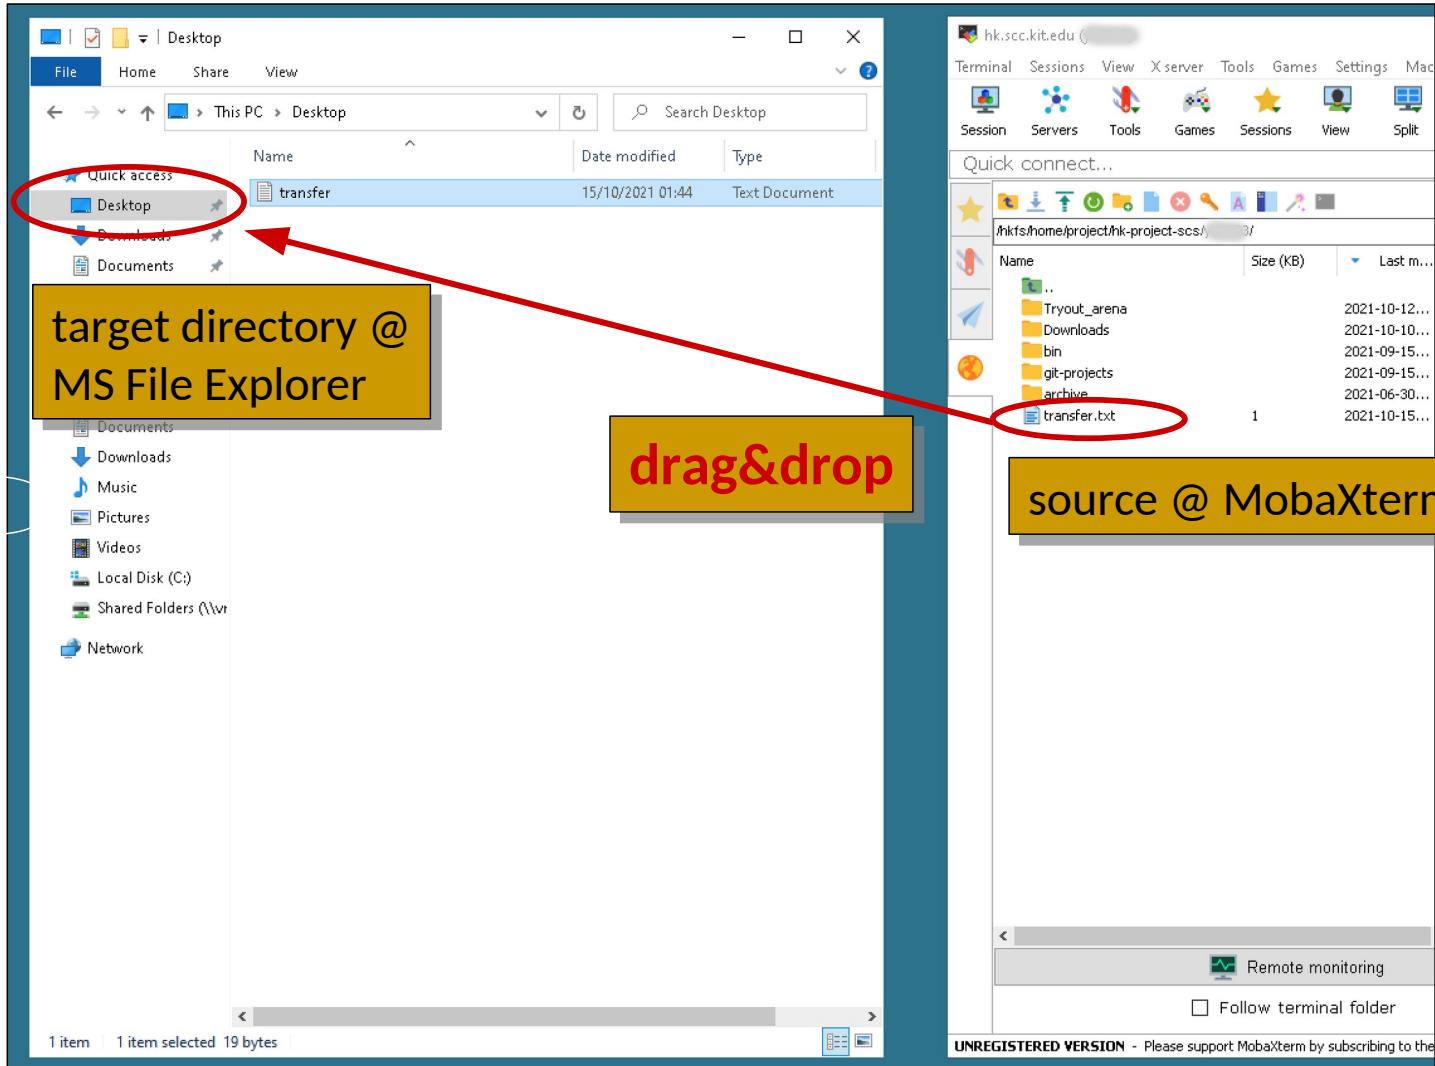


**LSDF Online Storage (KIT)  
SDS@HD  
bwDataArchive**

# Additional storage for scientific data in BaWü

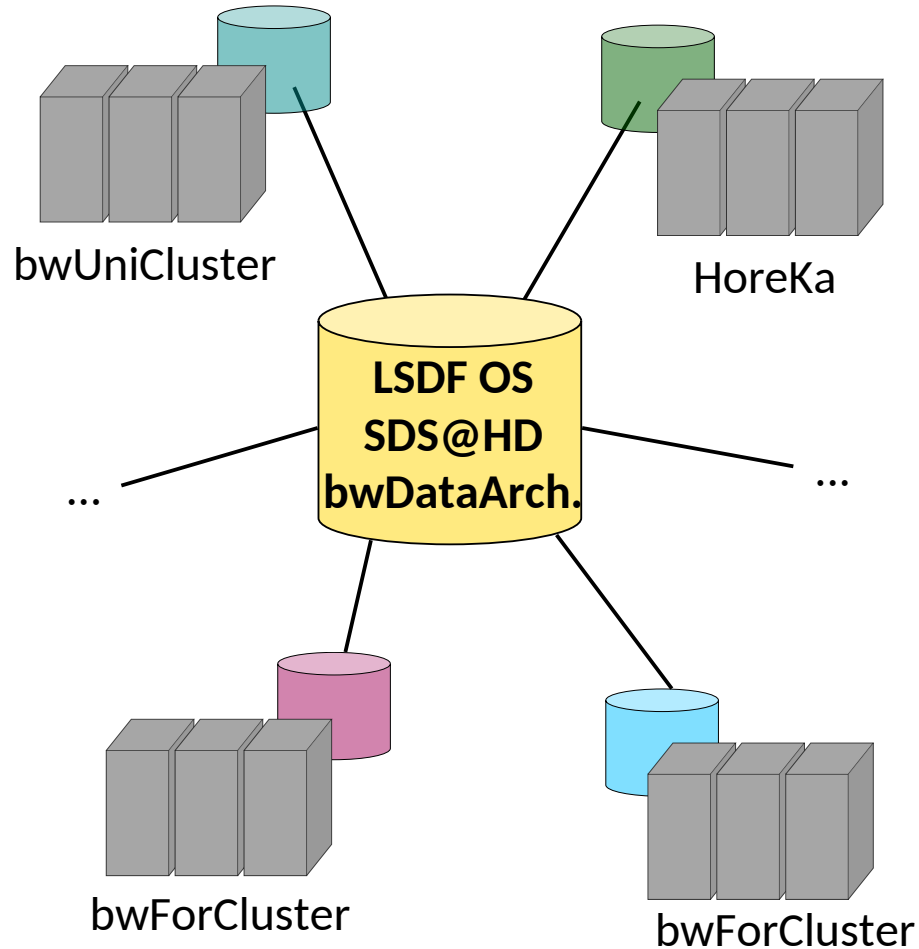


# LSDF Online Storage (KIT)

- Central storage located at KIT
- 100GB Soft Limit/400 GB Hard Limit disk space per user
- Registration at <https://bwidm.scc.kit.edu>
- Hosts
  - Via NFS/CIFS: `os.lsd.f.kit.edu`
  - Via SSH/SCP/SFTP: `os-login.lsd.f.kit.edu`
- Transfer tools
  - `scp`, `sftp`, `rsync`, `https`, ...
- Direct mount on `bwUniCluster` and `HoreKa`
- Documentation at [https://wiki.scc.kit.edu/lsdf/index.php/Category:LSDF\\_Online\\_Storage](https://wiki.scc.kit.edu/lsdf/index.php/Category:LSDF_Online_Storage)

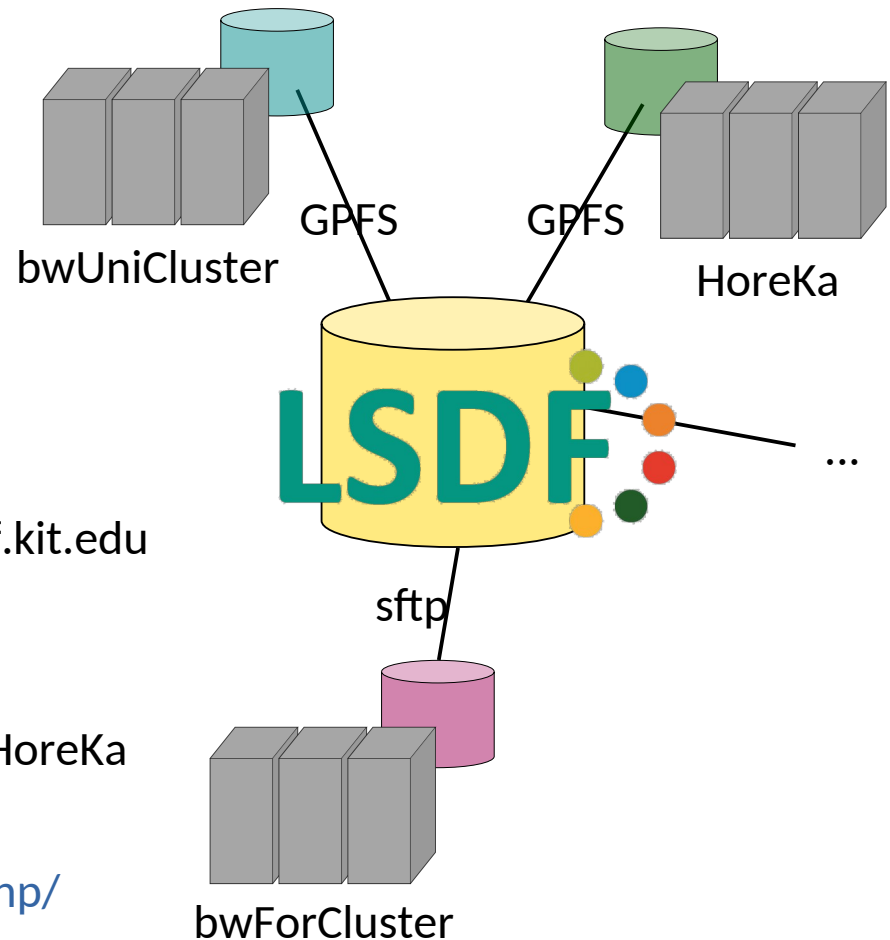


# SDS@hd

- Central storage located at HD
- Capacity (March 2020): 11.2 PB
- Registration at <https://bwservices.uni-heidelberg.de/>
- Integration in bwIDM service
- Authentication with LDAP/Kerberos
- Hosts
  - NFSv4
  - SMB
  - sshfs
- Transfer tools
  - sftp
- Documentation at <https://wiki.bwhpc.de/e/Category:Sds-hd>

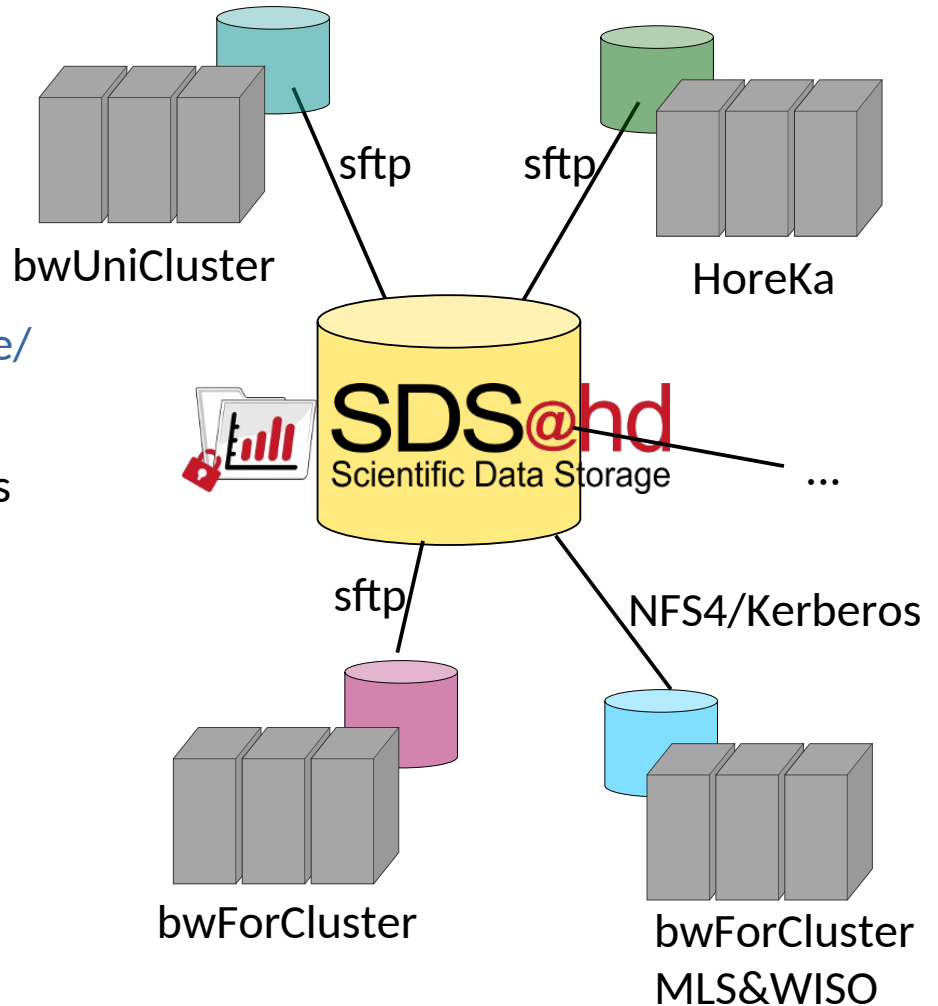

# bwDataArchive

- Long-term data archiving of research data located at KIT
- Magnetic tape storage via HPSS
- Registration at <https://www.rda.kit.edu/bwDA/>
- Transfer tools
  - sftp
  - GridFTP
- Documentation at <https://www.rda.kit.edu>

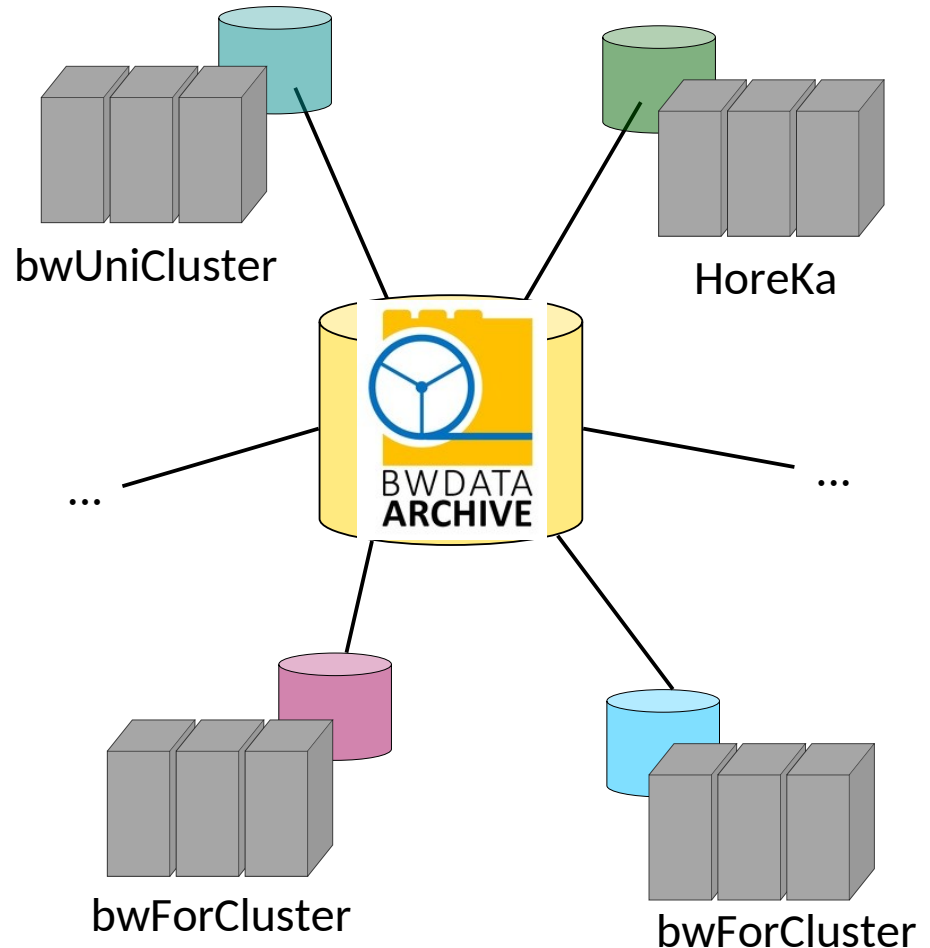

# FAQs

# Frequently asked questions - bwUniCluster

More Info: [https://wiki.bwhpc.de/e/BwUniCluster\\_2.0\\_Login#Troubleshooting](https://wiki.bwhpc.de/e/BwUniCluster_2.0_Login#Troubleshooting)

## **Issue: The "Your OTP:" prompt never appears and the connection hangs/times out instead**

Likely cause: You are most likely not on a network from which access to the bwUniCluster 2.0 system is allowed. Please check if you might have to establish a VPN connection first.

## **Issue: The system asks for the One-Time Password multiple times**

Likely cause: Make sure you are using the correct Software Token to generate the One-Time Password.

## **Issue: The system asks for the service password multiple times**

Likely cause: Make sure you are using the service password set on bwIDM and not the password valid for your home institution. Unlike the bwUniCluster 1, the bwUniCluster 2.0 only accepts the service password.

## **Issue: There is an error message by the pam\_ses\_open.sh skript**

Likely cause: Your account is in the "LOST\_ACCESS" state because the entitlement is no longer valid, the questionnaire was not filled out or there was a problem during the communication between your home institution and the central bwIDM system. Please try the following steps:

- Log into [bwIDM](#), look for the bwUniCluster entry and click on **Registry info**. Your "Status:" should be "ACTIVE". If it is not, please wait for ten minutes since logging into the bwIDM causes a refresh and the problem might fix itself. If the status does not change to ACTIVE after a longer amount of time, please contact the support channels.
- If you have not filled out the questionnaire, please do so on [https://zas.bwhpc.de/shib/en/bwunicluster\\_survey.php](https://zas.bwhpc.de/shib/en/bwunicluster_survey.php) and then wait for about ten minutes before attempting to log into the HPC system again.



# Frequently asked questions - HoreKa

More Info: <https://www.nhr.kit.edu/userdocs/horeka/faq/>

## ? The connection to HoreKa cannot be established. ▾

Please note that you have to be connected to one of the [trusted networks](#) to be able to access HoreKa or HAICORE. If you are not on campus you have to establish a VPN connection to your institution first.

## ? The "Your OTP:" prompt never appears and the connection hangs/times out instead. >

## ? The One-Time Password is not being accepted. ▾

There are multiple possible reasons for this:

- The Token was not fully initialized. Please note that after the QR code has been scanned, an OTP has to be generated and entered back into the web interface to confirm that the token works correctly.
- The One-Time Passwords are time-dependent. Please make sure that the local clock on your device is set correctly.
- Make sure you are using the correct Token to generate the OTP.

## ? The service password is not being accepted. ▾

Please keep in mind that the dedicated service password is different from the account password you are using to log into FeLS.

## ? I have lost my token. Can I register a new one? >

## ? There is an error message by the pam\_ses\_open.sh script. ▾

Your account is most likely in the "LOST\_ACCESS" state because the entitlement is no longer valid or there was a problem during the communication between your home institution and the central bwIDM system. Please try the following steps:

Log into FeLS, look for the FH2 entry and click on Registry info. Your "Status:" should be "ACTIVE". If it is not, please wait for ten minutes since logging into the bwIDM causes a refresh and the problem might fix itself. If the status does not change to ACTIVE after a longer amount of time, please contact the support channels.